

LASER MINI


Laser Mini is a skyscraper projector for outdoor installation that creates a wall washing effect on a building façade. It is available with a 5° optic and a silver finish.



TECHNICAL DATA

Wattage / Input	10W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anodized Extruded Aluminum Lens: Tempered Safety Glass Cable Length: 1.64'
CCT	3000K
BUG Rating	B0-U3-G0
Delivered Lumens	600 lm (3000K)
Efficacy	60.0 lm/W
Optics	5°
Finishes	Silver
Fixture Dimensions	5.83" l x 2.56" w x 5.12 h
LED Source	3 x 2W High Power CREE LEDs
Fixture Weight	2.4 lbs
IP Rating	IP66
IK Rating	IK07

Fixture Dimensions

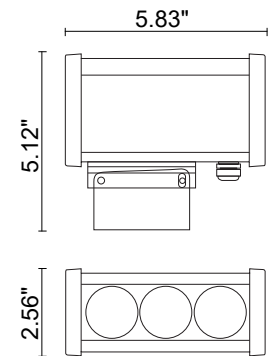

ORDERING INFORMATION

Example: 108002P-30K-05-SI. Power Supplies ordered separately.

108002P	-	30K	-	05	-	SI
Model No.		CCT		CCT		Finish
108002P		30K - 3000K		05 - 5°		SI - Silver

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00155	Non-Dim	120-277VAC to 24VDC, 30W, Class 2	1-2
PPLT00586	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-3
PPLT00709	ELV/TRIAC & 0-10V Dimming to 5% and OFF	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-7
PPLT00158	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-8
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-8


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-3
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-7

For other power supply options consult factory.

PHOTOMETRIC DATA

Maximum Candela = 48053

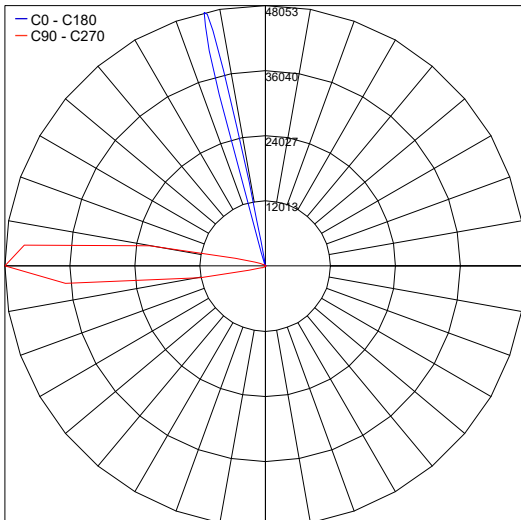

PHOTOMETRIC FILENAME : LASER MINI 108002P.IES

Job Name/Date:

Fixture Type Designation: