

# LASER MINI


Laser Mini is a skyscraper projector for outdoor installation that creates a wall washing effect on a building façade. It is available with a 5° optic and a silver finish.



## TECHNICAL DATA

<b>Wattage / Input</b>	10W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Anodized Extruded Aluminum Lens: Tempered Safety Glass Cable Length: 1.64'
<b>CCT</b>	3000K
<b>BUG Rating</b>	B0-U3-G0
<b>Delivered Lumens</b>	600 lm (3000K)
<b>Efficacy</b>	60.0 lm/W
<b>Optics</b>	5°
<b>Finishes</b>	Silver
<b>Fixture Dimensions</b>	5.83" l x 2.56" w x 5.12 h
<b>LED Source</b>	3 x 2W High Power CREE LEDs
<b>Fixture Weight</b>	2.4 lbs
<b>IP Rating</b>	IP66
<b>IK Rating</b>	IK07

Fixture Dimensions

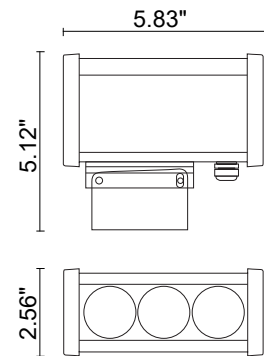

## ORDERING INFORMATION

Example: 108002P-30K-05-SI. Power Supplies ordered separately.

108002P	-	30K	-	05	-	SI
<b>Model No.</b>		<b>CCT</b>		<b>CCT</b>		<b>Finish</b>
108002P		30K - 3000K		05 - 5°		SI - Silver

Job Name/Date:

Fixture Type Designation:


## SUGGESTED POWER SUPPLIES 24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00056</a>	Non-Dim	120-277VAC to 24VDC, 26W, Class 2, IP66	1-2
<a href="#">PPLT00155</a>	Non-Dim	120-277VAC to 24VDC, 30W, Class 2	1-2
<a href="#">PPLT00156</a>	Non-Dim	120-277VAC to 24VDC, 45W, Class 2	1-3
<a href="#">PPLT00157</a>	Non-Dim	120-277VAC to 24VDC, 60W, Class 2	1-4
<a href="#">PPLT00143</a>	0-10V Dimming to 10%	120-277VAC to 24VDC, 96W, Class 2, IP64	1-7
<a href="#">PPLT00158</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-8
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-8

For other power supply options consult factory.

## PHOTOMETRIC DATA

Maximum Candela = 48053

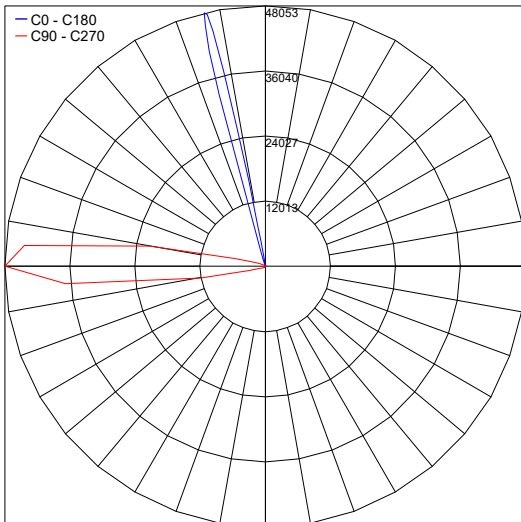

PHOTOMETRIC FILENAME : LASER MINI 108002P.IES

Job Name/Date:

Fixture Type Designation: