





Lightbeam is an IP66-rated floodlight for outdoor installation that comes in 4 sizes ranging from 18-60 LEDs. Each version has 7 light beam options and is available in 3000K or 4000K.

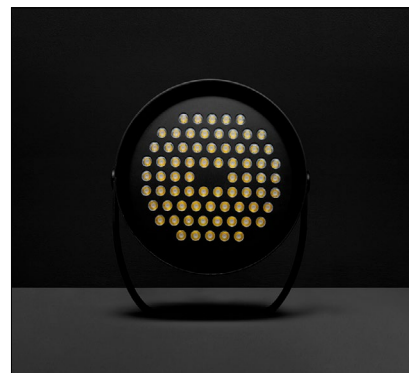

## TECHNICAL DATA

<b>Wattage</b>	36W, 60W, 100W, 150W
<b>Power Supply</b>	Integral 120-277VAC
<b>Construction</b>	Body: Die-Cast Copper-Free Aluminum Lens: Tempered, Safety Glass Cable Length: 3.28' included
<b>CCT</b>	3000K, 4000K
<b>BUG Rating</b>	B3-U0-G0 (3000K, 8°, 36W, 60W, 100W) B4-U1-G0 (3000K, 8°, 150W)
<b>Delivered Lumens</b>	2,702 lm (Lightbeam 18 - 3000K) 4,887 lm (Lightbeam 30 - 3000K) 6,277 lm (Lightbeam 48 - 3000K) 12,135 lm (Lightbeam 60 - 3000K)
<b>Efficacy</b>	75.1 lm/W (Lightbeam 18 - 3000K) 81.5 lm/W (Lightbeam 30 - 3000K) 62.8 lm/W (Lightbeam 48 - 3000K) 80.9 lm/W (Lightbeam 60 - 3000K)
<b>Optics</b>	8° / 15° / 30° / 45° / 60° / 15x60° / 20x40°
<b>Finishes</b>	Black
<b>Fixture Dimensions</b>	Ø7.48" x 9.76" (Lightbeam 18) Ø8.66" x 10.73" (Lightbeam 30) Ø10.24" x 12.20" (Lightbeam 48) Ø13.78" x 16.69" (Lightbeam 60)
<b>Fixture Weight</b>	5.73 lbs - Lightbeam 18 11.46 lbs - Lightbeam 30 16.09 lbs - Lightbeam 48 29.76 lbs - Lightbeam 60
<b>LED Source</b>	18-60 OSRAM LED
<b>IP Rating</b>	IP66
<b>Impact Rating</b>	IK08

## Fixture Dimensions

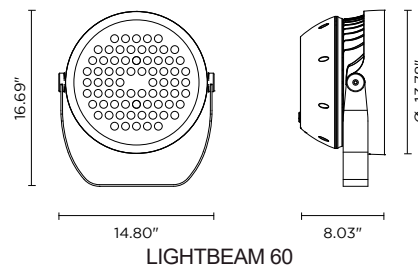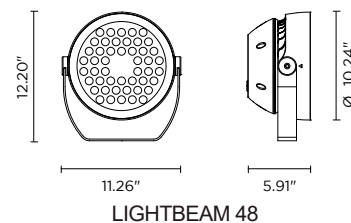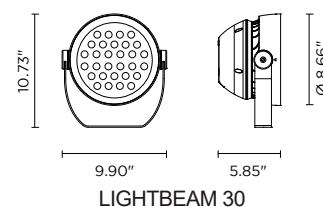

## ORDERING INFORMATION

Example: 101803P-30-45-MB. Accessories sold separately - see page 2

	-		-		- MB
--	---	--	---	--	------

Model No.	CCT	Optics	Finish
101801P - Lightbeam 18 (36W)	30 - 3000K	8 - 8°	MB - Matte Blk
101802P - Lightbeam 30 (60W)	40 - 4000K	15 - 15°	
101803P - Lightbeam 48 (100W)		30 - 30°	
101804P - Lightbeam 60 (150W)		45 - 45°	
		60 - 60°	
		15x60 - 15°x60° 20x40 - 20°x40°	

Job Name/Date:

Fixture Type Designation:


## ACCESSORIES

### Anti-Glare


- 101801-VISOR** - Anti-Glare Visor for Lightbeam 18 (36W)
- 101802-VISOR** - Anti-Glare Visor for Lightbeam 30 (60W)
- 101803-VISOR** - Anti-Glare Visor for Lightbeam 48 (100W)
- 101804-VISOR** - Anti-Glare Visor for Lightbeam 60 (150W)

## PHOTOMETRIC DATA


Note: All photometry is 3000K

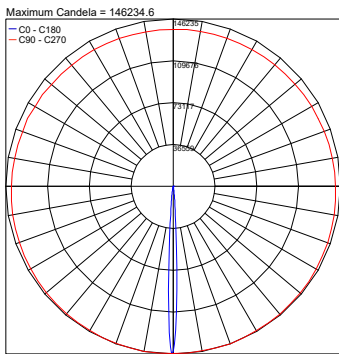


PHOTOMETRIC FILENAME : BEAMER 101801P\_3000K\_8°.IES

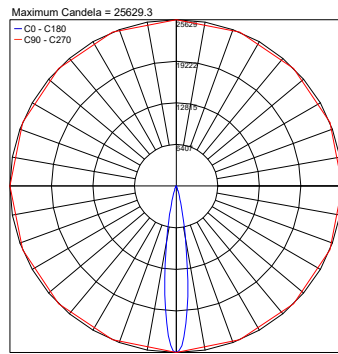


PHOTOMETRIC FILENAME : BEAMER 101801P\_3000K\_15°.IES

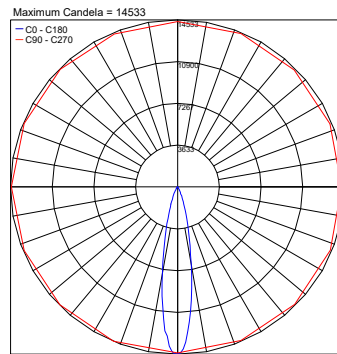


PHOTOMETRIC FILENAME : BEAMER 101801P\_3000K\_30°.IES

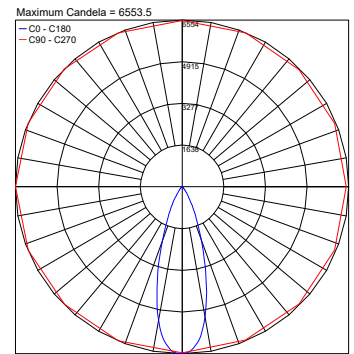


PHOTOMETRIC FILENAME : BEAMER 101801P\_3000K\_45°.IES

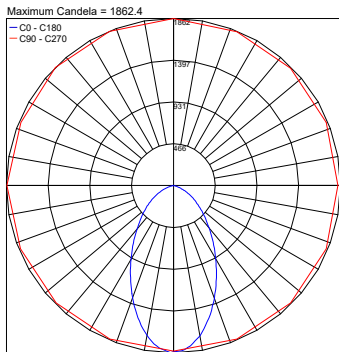

PHOTOMETRIC FILENAME : BEAMER 101801P\_3000K\_60°.IES

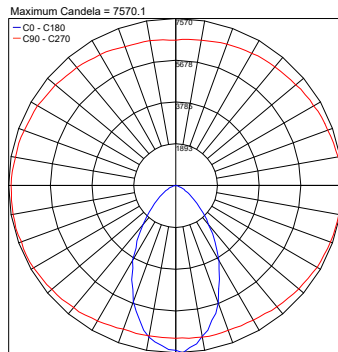

PHOTOMETRIC FILENAME : BEAMER 101801P\_3000K\_15°X60°.IES

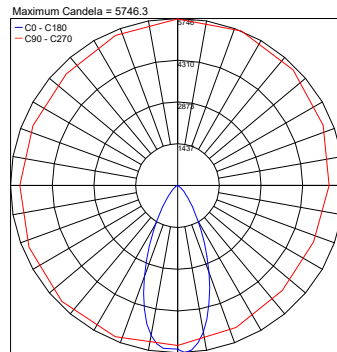

PHOTOMETRIC FILENAME : BEAMER 101801P\_3000K\_20°X40°.IES

Job Name/Date:

Fixture Type Designation: