


Line 1.1 is an indoor steplight for recessed installation in platerboard. It is available in white or blue light, and with three different finishes.



TECHNICAL DATA

Wattage / Input	2W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body and Trim: Sheet Metal / Steel
CCT	2700K, 3000K, 4000K, 5000K, Blue
CRI	>80
Delivered Lumens	32 lm (3000K, 500mA)
Efficacy	16 lm (3000K, 500mA)
Optics	Diffuse
Finishes	3 Standard, Custom RAL
Fixture Dimensions	2.76" h x 2.36" w x 1.57" l
Cutout Size	1.50" x 2.17"
Fixture Weight	0.77 lbs
LED Source	1 Power LED
Lumen Maintenance	L90, B10>50,000hrs (Ta 25°C)
Color Consistency	1/4 ANSI BIN
Operating Temp.	32°F to +113°F
IP Rating	IP20
IK Rating	IK06

Wall Cut-out: 1.50" x 2.17"
Fixture Dimensions



ORDERING INFORMATION

Example: LN1112FAB. Power Supplies ordered separately.

LN1112		A	
Model No.	CCT	Optics	Finish
LN1112	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - Blue	A - Diffuse	B - White S - Satin T - Cor-ten C - Custom RAL (Consult factory for "C")

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00497	Phase Dim (120V only)	120VAC to 500mA, 12W, Class 2	2-5
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 20W, Class 2	1-10
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 50W, Class 2	1-13
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-14

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	3-4
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	5-9
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	10-13

For other power supply options consult factory.


Job Name/Date:

Fixture Type Designation:




PHOTOMETRIC DATA

Note all Photometry is 3000K

D - Diffuse

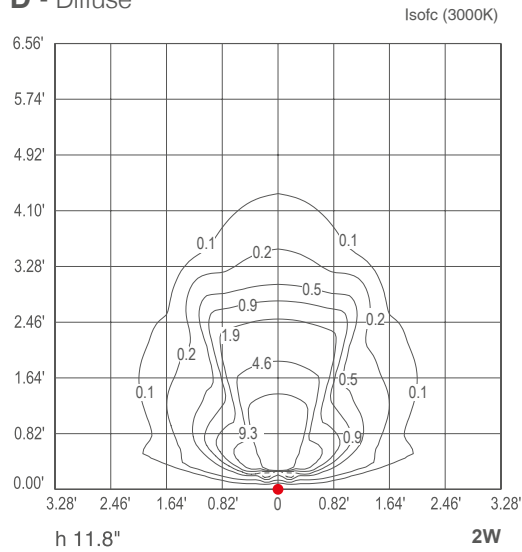

D - Diffuse

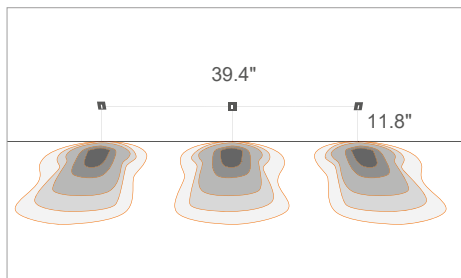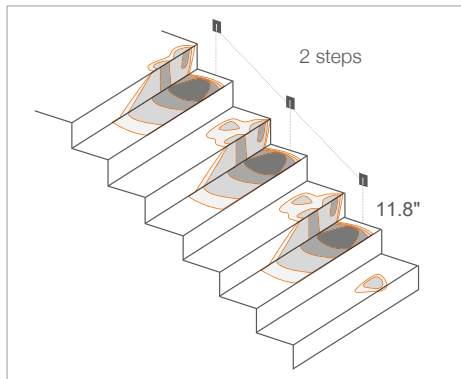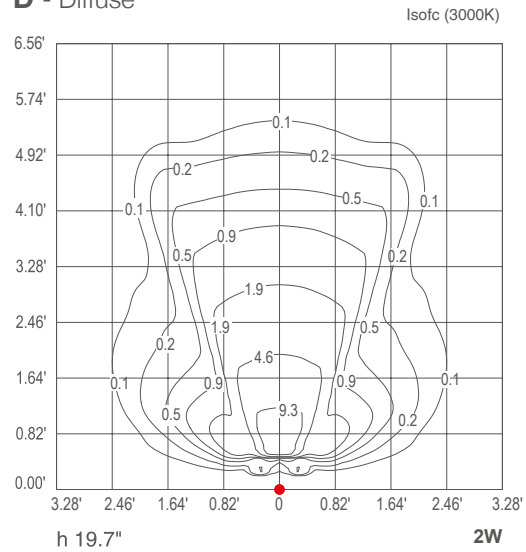

Job Name/Date:

Fixture Type Designation: