

# LINEAR 4.1


Linear are a series of bollards for outdoor use, available in different heights and ideal for gardens and small paths. Linear 4 features 1, 2 and 4 beam options, asymmetric optics, and 3 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	8W, 16W (120VAC)
<b>Power Supply</b>	Integral
<b>Construction</b>	Body: Aluminum Alloy EN AW 6060 Lens: Serigraphed, transparent and tempered extra-clear glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>80
<b>BUG Rating</b>	B0-U1-G0 (3000K, 8W) B0-U1-G1 (3000K, 16W)
<b>Delivered Lumens</b>	243 lm (3000K, 8W) 609 lm (3000K, 16W)
<b>Efficacy</b>	30.4 lm/W (3000K, 8W) 38.1 lm/W (3000K, 16W)
<b>Optics</b>	Asymmetrical
<b>Finishes</b>	3 Standard, Custom RAL (see below)
<b>Fixture Dimensions</b>	5.91" l x 5.91" w x 6.69" / 23.62" / 31.50" h
<b>Fixture Weight</b>	7.72 lbs, 11.68 lbs, 13.45 lbs
<b>LED Source</b>	3 Power LEDs (8W) 3 High Intensity LED (16W)
<b>Lumen Maintenance</b>	L80 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	1/4 ANSI BIN (8W) 3-Step MacAdam (16W)
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK06

Fixture Dimensions

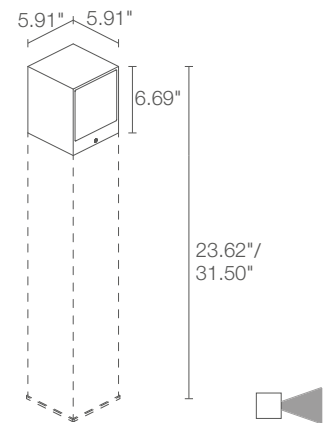

## ORDERING INFORMATION



Example: CL41105AF. Accessories ordered separately.

CL411			A	
Model No.	Wattage	CCT	Optics	Finish
CL411	0 - 8W 1 - 16W	F - 2700K 5 - 3000K 9 - 4000K	A - Asymmetrical	F - Gray H - Anthracite T - Corten C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES Installation

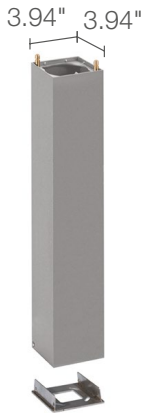

**WT000001**  
Plate for ground  
installation

**WT40** \_\_\_\_\_  
Column

For column include one of the below  
heights then choose a finish:

- 600** - 23.62" F - Gray
- 800** - 31.50" H - Anthracite
- T - Corten

Job Name/Date:


Fixture Type Designation:

## PHOTOMETRIC DATA





Note all Photometry is 3000K

8W

### A - Asymmetrical

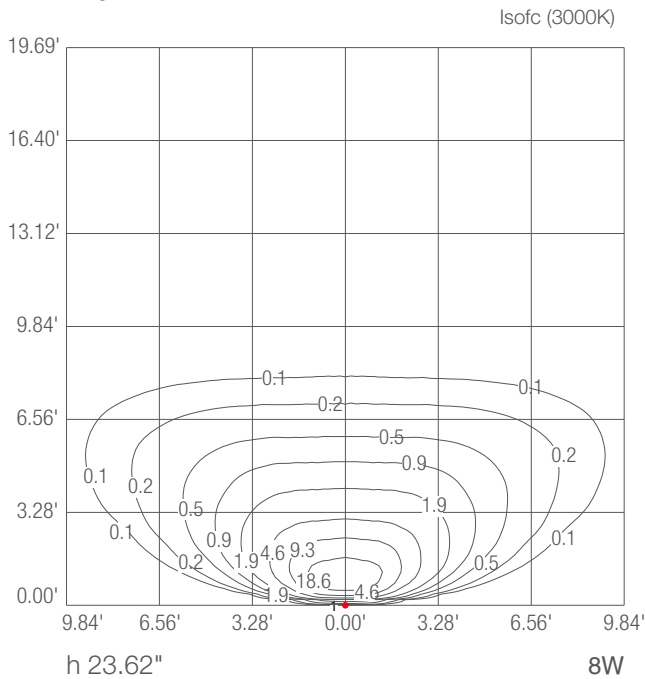

### A - Asymmetrical

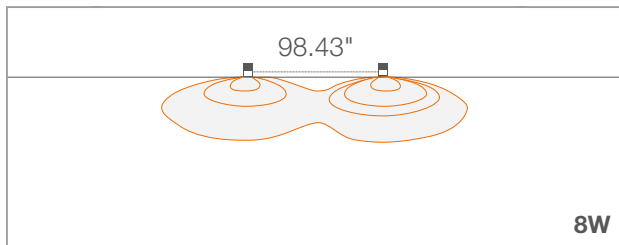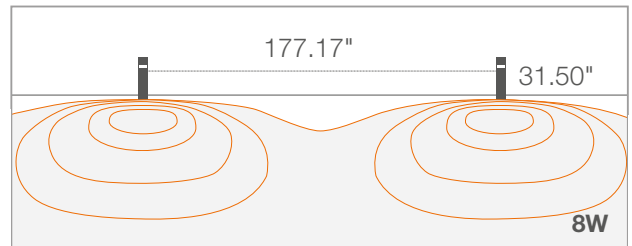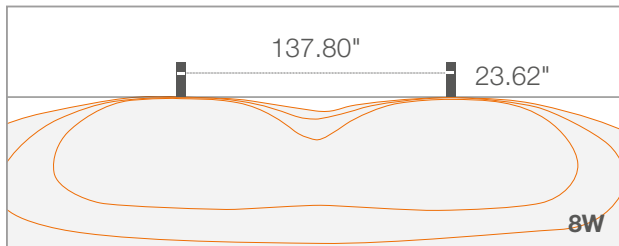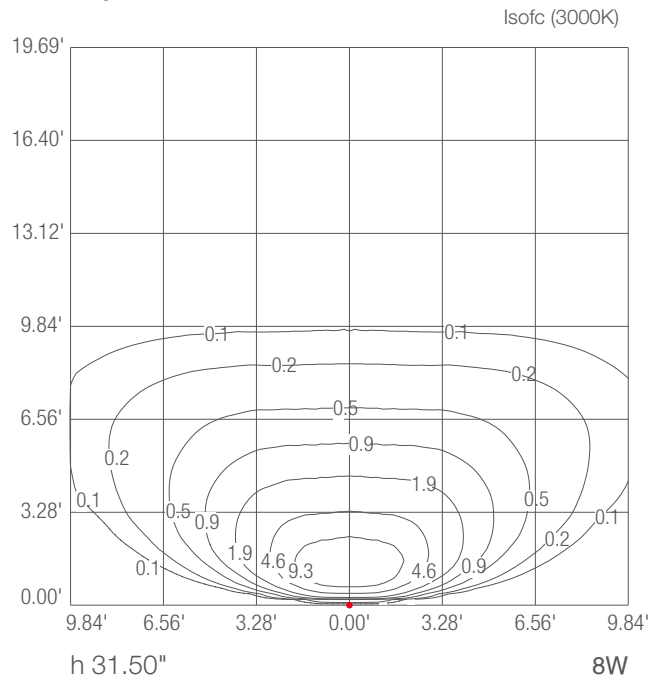

Job Name/Date:


Fixture Type Designation:

## PHOTOMETRIC DATA





Note all Photometry is 3000K

### 16W

#### A - Asymmetrical

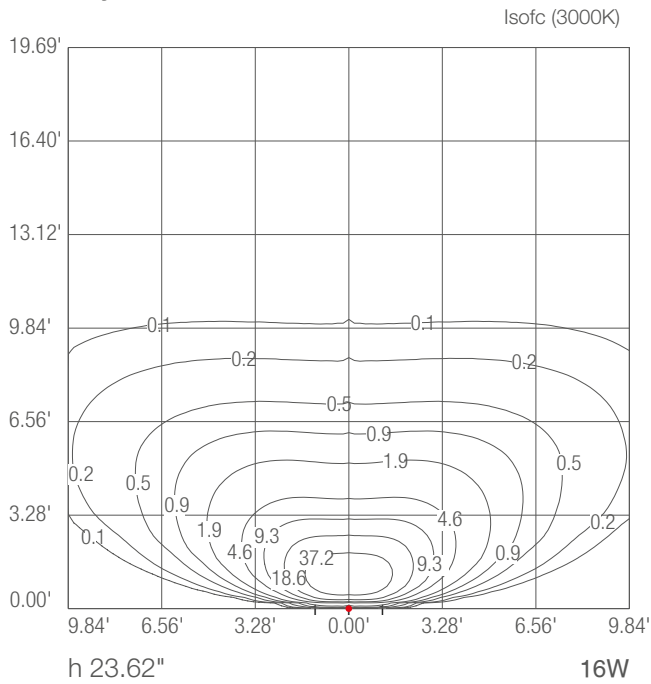

#### A - Asymmetrical

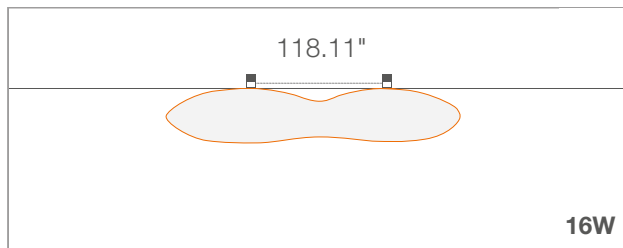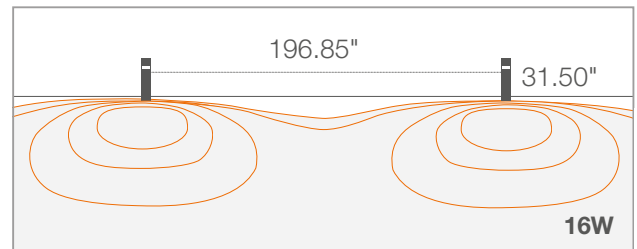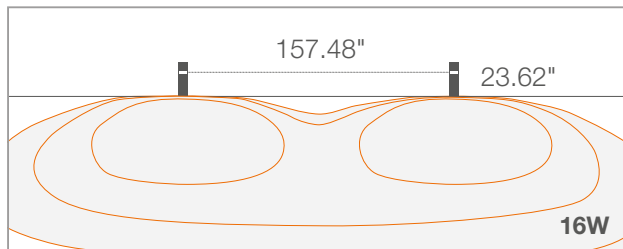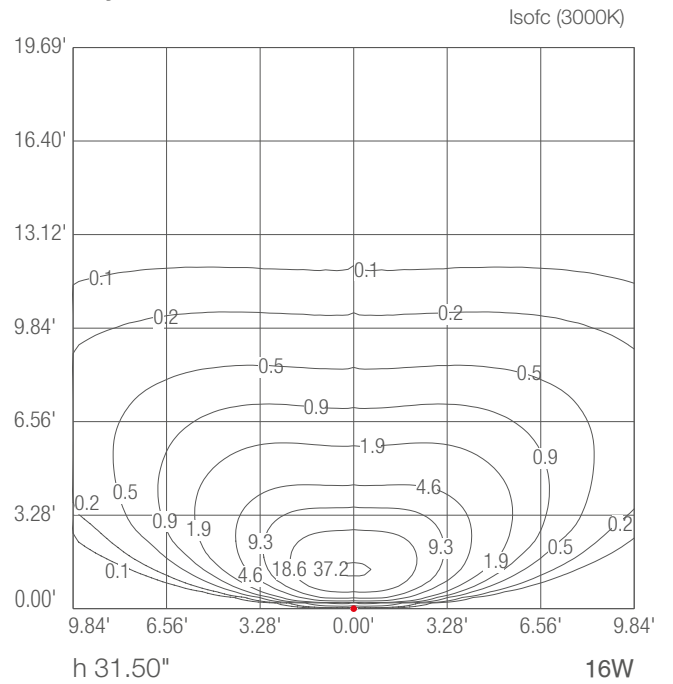

Job Name/Date:

Fixture Type Designation: