


Linear are a series of bollards for outdoor use, available in different heights and ideal for gardens and small paths. Linear 4 features 1, 2 and 4 beam options, asymmetric optics, and 3 standard finishes. Dark Sky compliant for output below 80°.

TECHNICAL DATA

Wattage / Input	14W, 32W (120VAC)
Power Supply	Integral
Construction	Body: Aluminum Alloy EN AW 6060 Lens: Serigraphed, transparent and tempered extra-clear glass
CCT	2700K, 3000K, 4000K
CRI	>80
BUG Rating	B0-U1-G0 (3000K, 14W) B1-U1-G1 (3000K, 32W)
Delivered Lumens	243 lm per beam (3000K, 14W) 609 lm per beam (3000K, 32W) Dark Sky compliant, output below 80°
Efficacy	30.4 lm/W per beam (3000K, 14W) 38.1 lm/W per beam (3000K, 32W)
Optics	Asymmetrical
Finishes	3 Standard, Custom RAL (see below)
Fixture Dimensions	5.91" l x 5.91" w x 6.69" / 23.62" / 31.50" h
Fixture Weight	7.72 lbs, 11.68 lbs, 13.45 lbs
LED Source	6 Power LEDs (14W) 6 High Intensity LED (32W)
Lumen Maintenance	L80 >50,000hrs (Ta 25°C)
Color Consistency	1/4 ANSI BIN (14W) 3-Step MacAdam (32W)
Operating Temp.	-4°F to +113°F
IP Rating	IP65
IK Rating	IK06



Fixture Dimensions

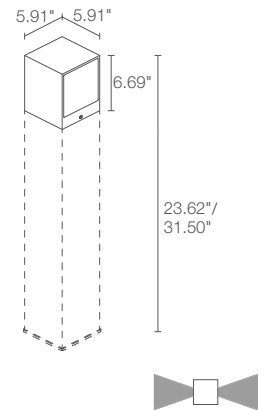

ORDERING INFORMATION



Example: CL42105AF. Accessories ordered separately.

CL421			A	
Model No.	Wattage	CCT	Optics	Finish
CL421	0 - 14W 1 - 32W	F - 2700K 5 - 3000K 9 - 4000K	A - Asymmetrical	F - Gray H - Anthracite T - Corten C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

ACCESSORIES Installation

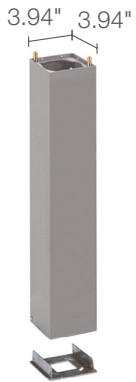

WT000001
Plate for ground
installation

WT40 _____

Column

*For column include one of the below
heights then choose a finish:*

600 - 23.62" **F** - Gray

800 - 31.50" **H** - Anthracite

T - Corten

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA





Note all Photometry is 3000K

14W per beam

A - Asymmetrical

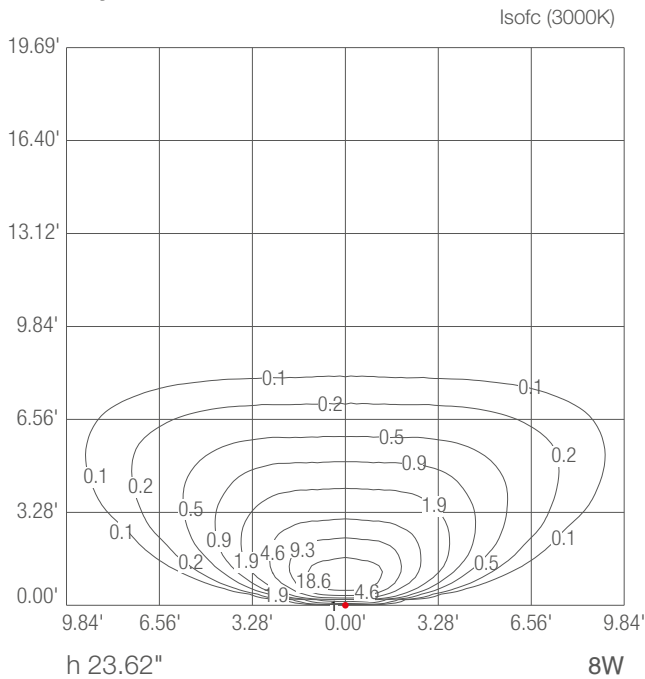

A - Asymmetrical

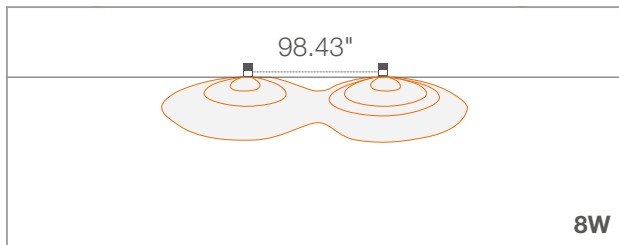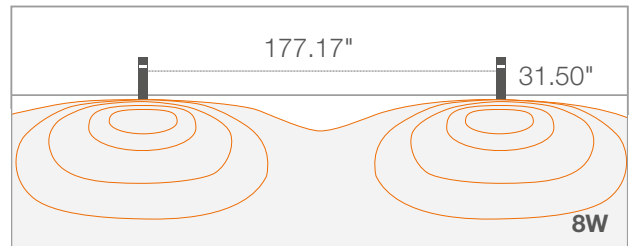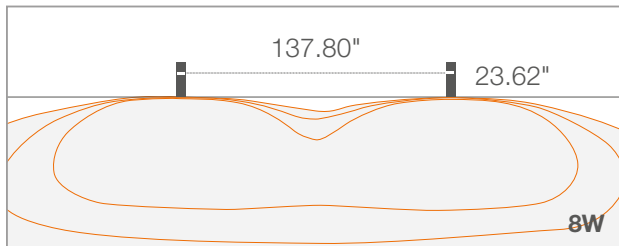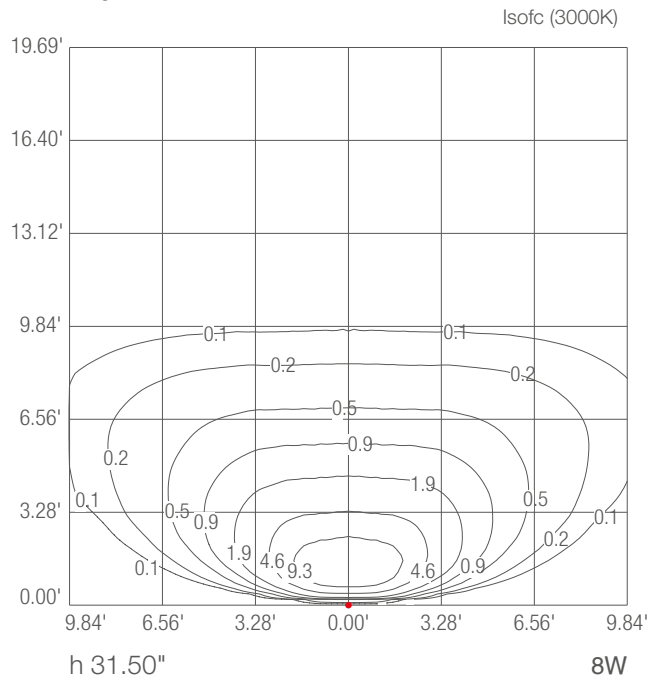

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA





Note all Photometry is 3000K

32W per beam

A - Asymmetrical

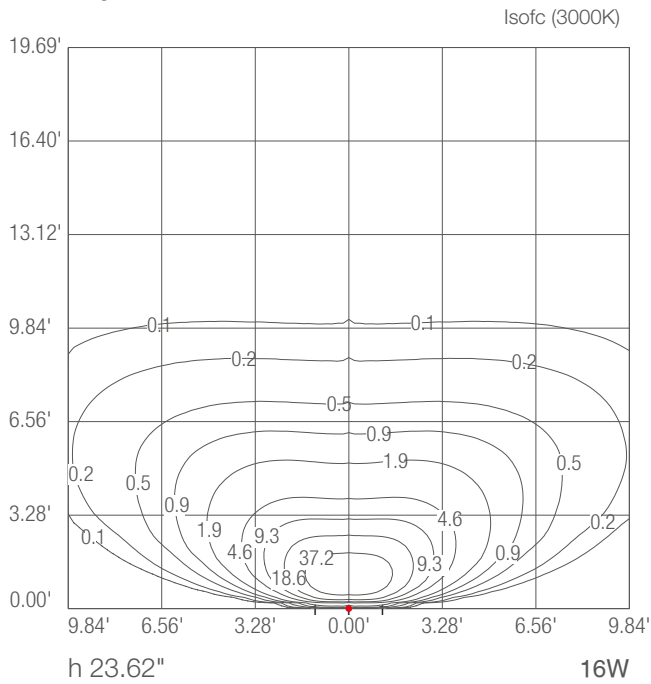

A - Asymmetrical

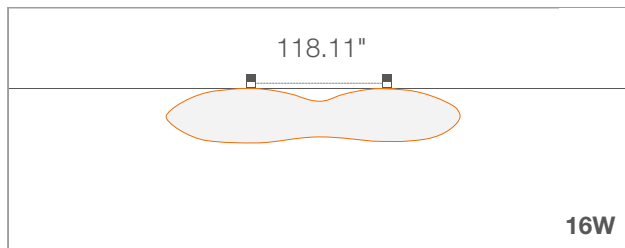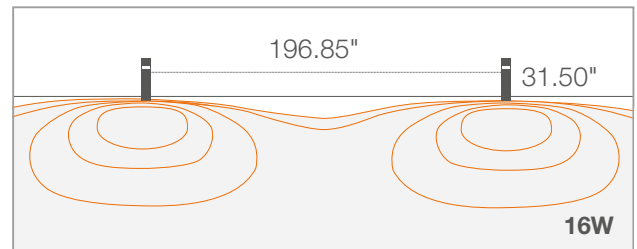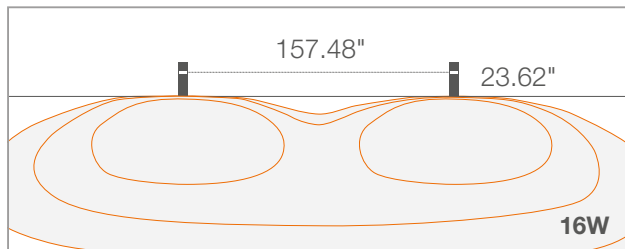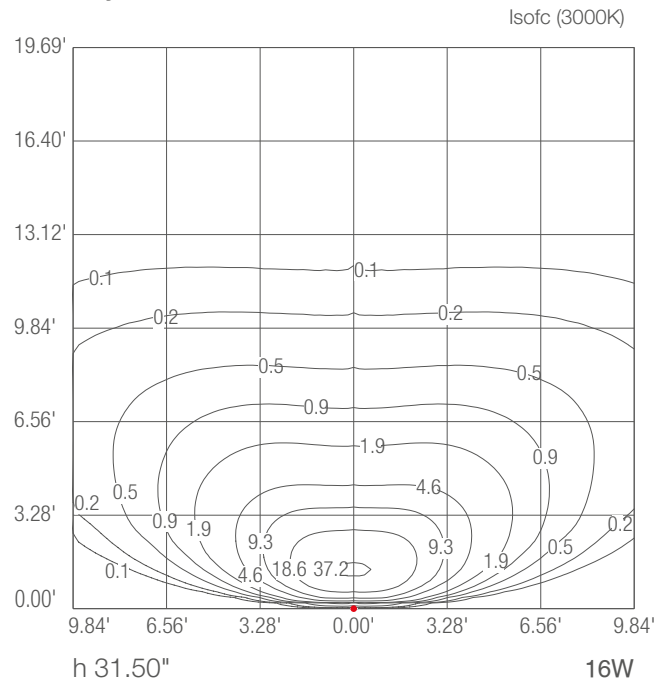

Job Name/Date:

Fixture Type Designation: