



Linear are a series of bollards for outdoor use, available in different heights and ideal for gardens and small paths. Linear 4 features 1, 2 and 4 beam options, asymmetric optics, and 3 standard finishes. Dark Sky compliant for output below 80°.

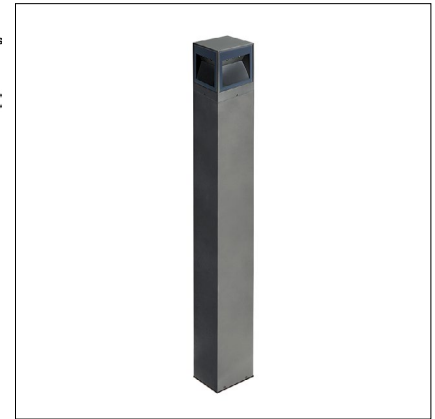

## TECHNICAL DATA

<b>Wattage / Input</b>	28W (120VAC)
<b>Power Supply</b>	Integral
<b>Construction</b>	Body: Aluminum Alloy EN AW 6060 Lens: Serigraphed, transparent and tempered extra-clear glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>80
<b>BUG Rating</b>	B1-U1-G1
<b>Delivered Lumens</b>	243 lm per beam (3000K) Dark Sky compliant, output below 80°
<b>Efficacy</b>	8.7 lm/W per beam (3000K)
<b>Optics</b>	Asymmetrical
<b>Finishes</b>	3 Standard, Custom RAL (see below)
<b>Fixture Dimensions</b>	5.91" l x 5.91" w x 6.69" / 23.62" / 31.50" h
<b>Fixture Weight</b>	7.72 lbs, 11.68 lbs, 13.45 lbs
<b>LED Source</b>	12 Power LEDs
<b>Lumen Maintenance</b>	L90, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	1/4 ANSI BIN
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK06

Fixture Dimensions

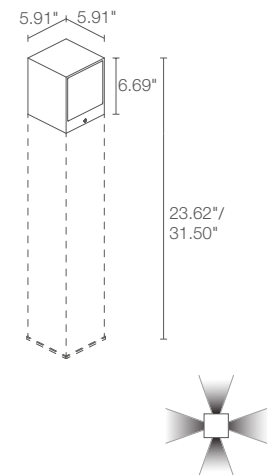

## ORDERING INFORMATION

Example: CL44105AF. Accessories ordered separately.



CL4410		A	
Model No.	CCT	Optics	Finish
CL4410	F - 2700K 5 - 3000K 9 - 4000K	A - Asymmetrical	F - Gray H - Anthracite T - Corten C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

### Installation

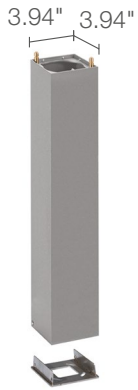

**WT000001**  
Plate for ground  
installation

### **WT40** \_\_\_\_\_

Column

For column include one of the below  
heights then choose a finish:

**600** - 23.62" **F** - Gray

**800** - 31.50" **H** - Anthracite

**T** - Corten


Job Name/Date:

Fixture Type Designation:





## PHOTOMETRIC DATA

Note all Photometry is 3000K, per beam

### A - Asymmetrical

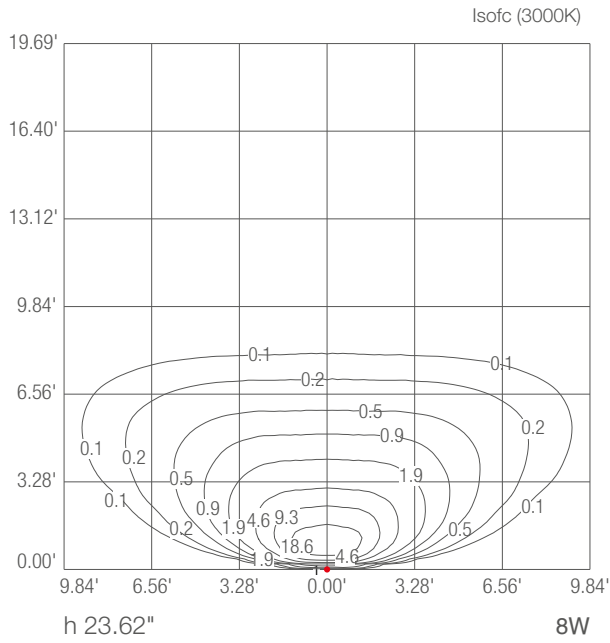

### A - Asymmetrical

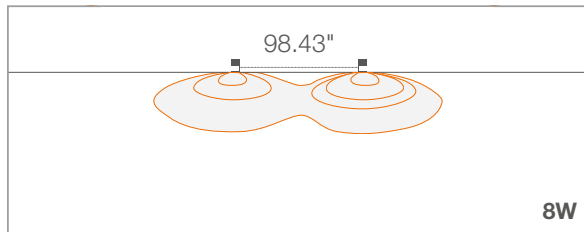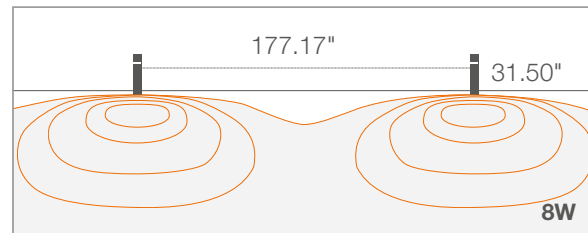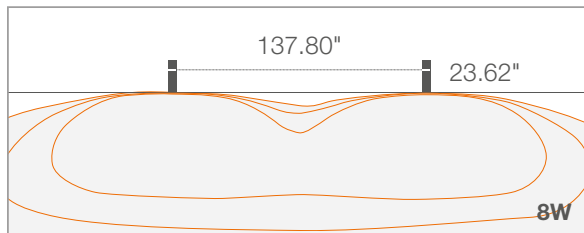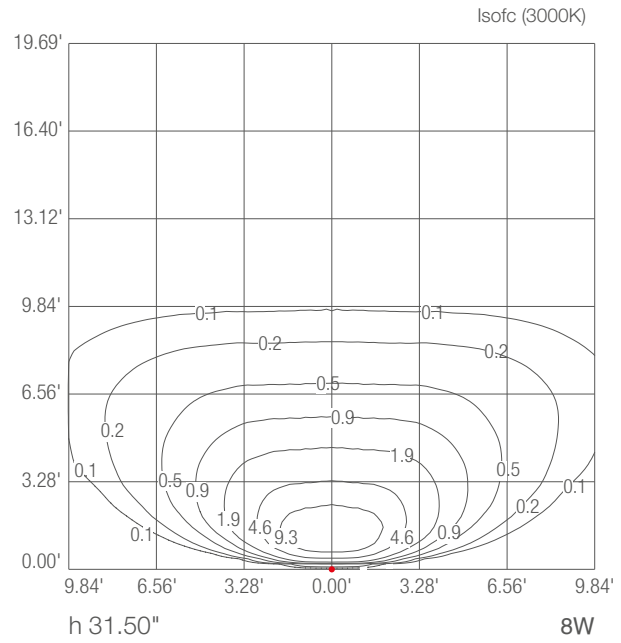

Job Name/Date:

Fixture Type Designation: