

LINEAR IP68 RECESSED



DESCRIPTION



- Linear Spotlight, entirely made of V4A stainless steel 1.4571 EPOL
- Degree of protection IP68 – for water depth up to 5 m
- Rectangular cover, made of V4A stainless steel EPOL L645xB128mm
- With 18 POW-LED 700 mA/24 V DC white and blue, 18 POW-LED RGB 700mA, temperature controlled (NTC), +/- 15° adjustable
- Constant-current power source/ RGB controller external
- Rotationally symmetric light distribution with POW-LED white and blue 30° and RGB medium 30°, Cable gland PG11, V4A stainless steel EPOL
- Installation housing made of V4A stainless steel EPOL with 4.92' cable protection tube for wall and floor installation in concrete fountains with tile covering and for welding into stainless steel fountains

REFERENCES

- Matching installation housing should be selected, depending on the installation type and situation.

OPTIONS ON REQUEST

- POW-LED with beam angle spot 10°, medium 30°, medium flood 45°; flood 90° and elliptical 41x10° on request
- POW-LED monochrome, single color in green, red, amber, turquoise
- Installation housing for other pool types or flush cover version on request.

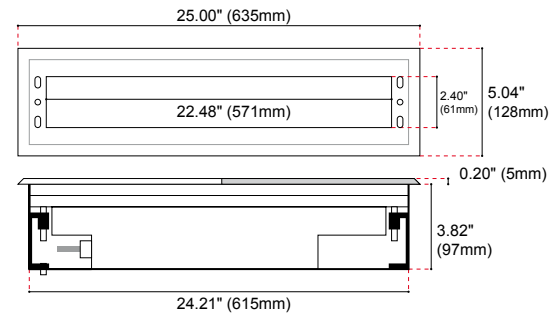

Article number Lamps Light color Wattage (TLF) Tension Radiation angle

Versions: Only underwater operation

POW-LED, Radiation Angle 30° (medium)

Article number	Lamps	Light color	Wattage (TLF)	Tension	Radiation angle
4.3061.40.11	18 POW-LED cold white <input type="checkbox"/>	6.000K	total 48 W (4140 lm)	700 mA/24 V-DC	30°
4.3061.40.12	18 POW-LED warm white <input type="checkbox"/>	3.000K	total 48 W (2700 lm)	700 mA/24 V-DC	30°
4.3061.40.13	18 POW-LED neutral white <input type="checkbox"/>	4.500K	total 48 W (2880 lm)	700 mA/24 V-DC	30°
4.3061.40.16	18 POW-LED royal blue <input type="checkbox"/>		total 48 W (610 mW/LED)	700 mA/24 V-DC	30°
4.3061.40.19	180 POW-LED RGB <input type="checkbox"/>		all on 50 W	700 mA/24 V-DC	30°

installation housing

4.3061.01.00	made of V4A stainless steel with 4.92' protective cable tube and M20 plastic terminating connection, for installation in concrete pools with tile covering
--------------	--

Job Name:

Fixture Type:

Last Modified:



designplan™

sales@designplan.com
www.designplan.com

POWER SUPPLIES

FOUNTAIN POWER SUPPLY

FPC-100EL0700

1 fixture

[120-277V to 700mA 100W Fountain PSU
DMX/RDM\(Field Addressable\)/dali/0-10V](#)

Job Name:

Fixture Type:

Last Modified:



sales@designplan.com
www.designplan.com