


Lira is an outdoor surface mounted step light with soft lines that is perfect for elegant, modern settings. It is available in 2 lengths and asymmetrical optics.



## TECHNICAL DATA

<b>Wattage / Input</b>	6W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Die-cast Aluminum Lens: Glass Cable Length: 4.9'
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>80
<b>BUG Rating</b>	B0-U1-G0 (3000K, Gray, Anthracite, Cor-ten) B0-U2-G0 (3000K, White)
<b>Delivered Lumens</b>	368 lm (3000K)
<b>Efficacy</b>	61.3 lm/W
<b>Optics</b>	Asymmetrical
<b>Finishes</b>	4 Standard, Custom RAL (see below)
<b>Fixture Dimensions</b>	1.26" w x 4.88" l x 3.98" h
<b>Fixture Weight</b>	1.17 lbs
<b>LED Source</b>	18 Mid-Power LEDs
<b>Lumen Maintenance</b>	L80,B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP65
<b>Impact Rating</b>	IK08

Fixture Dimensions  
1.26" w x 4.88" l x 3.98" h

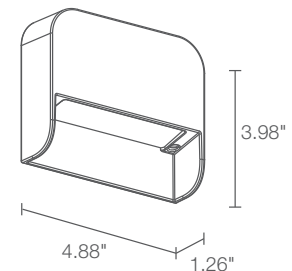

## ORDERING INFORMATION

*Example: LR10109AH. Accessories / Power Supplies ordered separately.*

LR1010		A	
<b>Model No.</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>
LR1010	F - 2700K 5 - 3000K 9 - 4000K	A - Asymmetrical	E - White F - Gray H - Anthracite T - Cor-ten C - Custom RAL (Consult factory for "C")

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC



Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00275</a>	Non-Dim	120-277VAC to 24VDC, 12W, Class 2	1-1
<a href="#">PPLT00632</a>	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-1
<a href="#">PPLT00056</a>	Non-Dim	120-277VAC to 24VDC, 26W, Class 2, IP66	1-3
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-13
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-13

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note all Photometry is 3000K

### A - Asymmetrical

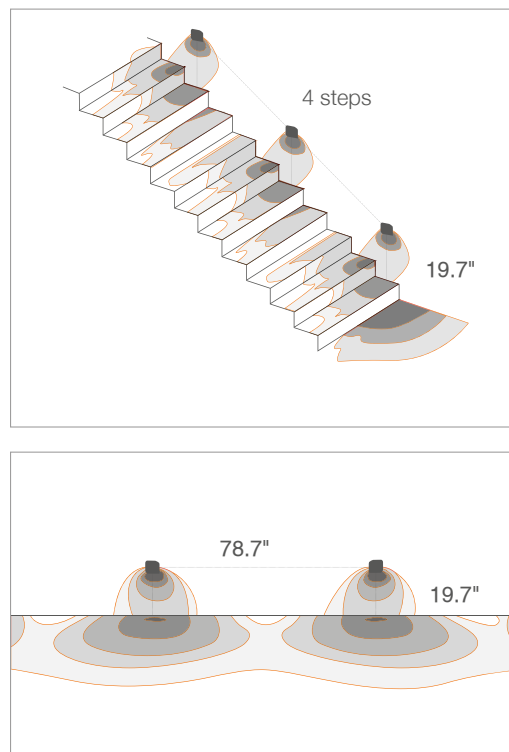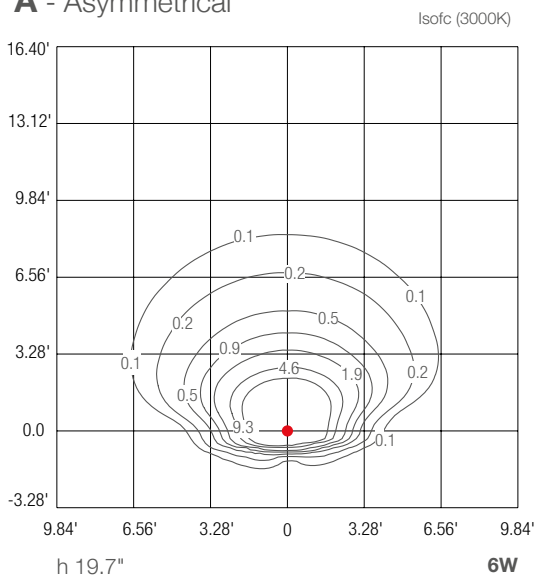

Job Name/Date:

Fixture Type Designation: