

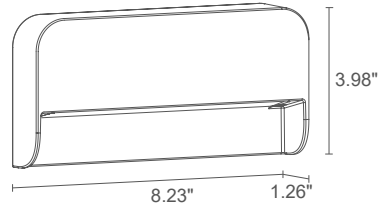


OUTDOOR STEP LIGHTS LIGHTING FOR PATHS AND STEPS




LIRA 1.0



POWER / MODEL CODE	6W 24VDC LR1010 ■ A E White LR1010 ■ A F Grey LR1010 ■ A H Anthracite LR1010 ■ A T Cor-ten
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	asymmetrical

LUMEN OUTPUT AT SOURCE	756 lm (3000K)
DELIVERED LUMEN OUTPUT	368 lm (3000K, white finish)
NO. AND TYPE OF LED	18 mid-power LEDs 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum lens in serigraphed extra-clear microprismatic glass
POWER SUPPLY UNIT	built in
POWER CABLES	includes 4.92 ft neoprene cable H05RN-F 3x0.04 Ø0.28 in
MOUNTING	surface mounted (wall)
ACCESSORIES	see accessories page
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request

LIRA 2.0



POWER / MODEL CODE	12W 24VDC LR2010 ■ A E White LR2010 ■ A F Grey LR2010 ■ A H Anthracite LR2010 ■ A T Cor-ten
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	asymmetrical



LUMEN OUTPUT AT SOURCE	1512 lm (3000K)
DELIVERED LUMEN OUTPUT	736 lm (3000K, white finish)
NO. AND TYPE OF LED	36 mid-power LEDs 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum lens in serigraphed extra-clear microprismatic glass
POWER SUPPLY UNIT	built in
POWER CABLES	includes 4.92 ft neoprene cable H05RN-F 3x0.04 Ø0.28 in
MOUNTING	surface mounted (wall)
ACCESSORIES	see accessories page
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request



**POSITIONING
DIAGRAMS**



LIRA 1.0

A - Asymmetrical

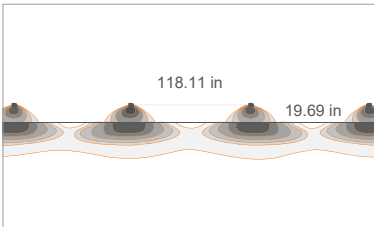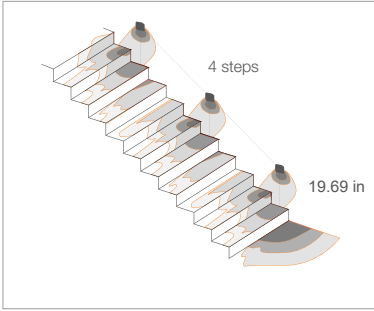

LIRA 2.0

A - Asymmetrical

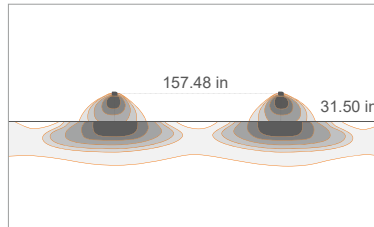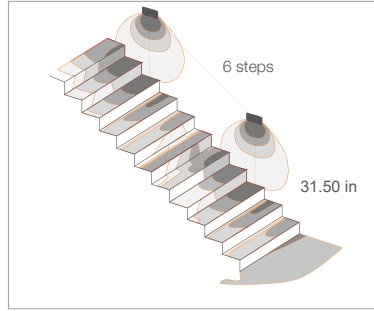

ACCESSORIES AND POSITIONING DIAGRAMMS

ACCESSORIES FOR INSTALLATION



WC0301

Optional outer casing

LIRA 1.0

3000K, 6W, anthracite

Project by / Corinne Vezzoni & Associés

Light planning by / 8' 18''


thecamp, Aix-en-Provence, France



OUTDOOR STEP LIGHTS

LIRA 1.0

A - Asymmetrical

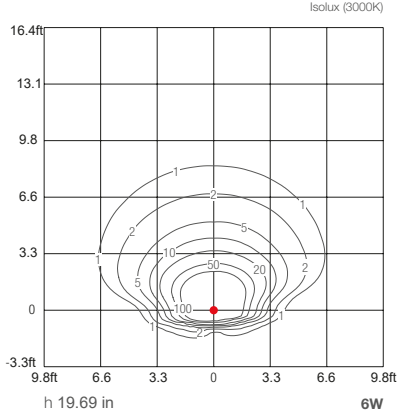

LIRA 2.0

A - Asymmetrical

