

Lyss 2.0 is a surface mounted specialty projector for applications such as windowsills and arches. It is offered in RGBW with a 12°x160° optic and 4 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	19W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Die-Cast Aluminum Lens: Polycarbonate Cable Length: 4.92'
<b>CCT</b>	RGBW (W=4000K)
<b>CRI</b>	—
<b>BUG Rating</b>	B0-U1-G0
<b>Delivered Lumens</b>	256 lm: (R) 31 lm, (G) 85 lm, (B) 30 lm, (W) 110 lm (4000K)
<b>Efficacy</b>	13.5 lm/W
<b>Optics</b>	12°x160°
<b>Finishes</b>	4 Standard, Custom RAL
<b>Fixture Dimensions</b>	4.65" w x 3.46" l x 2.60" h
<b>Fixture Weight</b>	1.54 lbs
<b>LED Source</b>	4 RGBW LEDs
<b>Lumen Maintenance</b>	L90, B10 >50,000hrs (Ta 25°C)
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK06

Fixture Dimensions


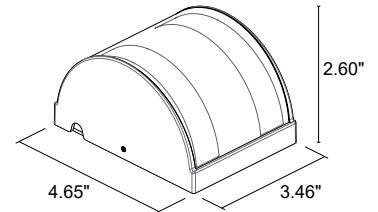


Plate can be adjusted by 5° to align the light beam on the window frame

## ORDERING INFORMATION

Example: LY20000P0070UH. Power Supplies and Accessories ordered separately.

LY20000P00	70	U	
<b>Model No.</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>
LY20000P00	70 - RGBW	U - 12°x160°	E - White F - Grey H - Anthracite T - Cor-ten C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


RGBW

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00288</a>	DMX/RDM(Field Addressable)/Dali/0-10V/4CH	120-277VAC to 24VDC, 100W, Class 2	1-4

For other power supply options consult factory.

## ACCESSORIES

### Installation

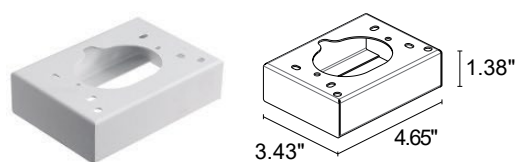


- WD0600E** - White
  - WD0600F** - Grey
  - WD0600H** - Anthracite
  - WD0600T** - Cor-ten
- Connection housing  
(Lyss 2.0)

## PHOTOMETRIC DATA

Note all Photometry is 3000K

**U** - 12°x160°

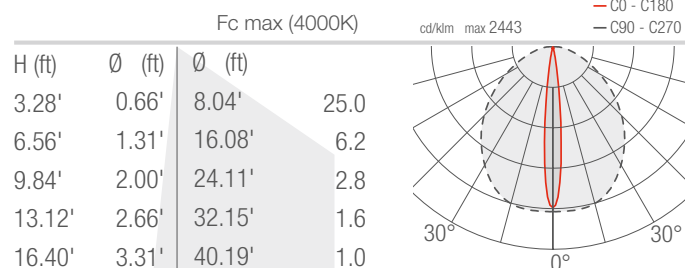

Job Name/Date:

Fixture Type Designation: