

Lyss 2.0 is a surface mounted specialty projector for applications such as windowsills and arches. It is offered in RGBW with a 12°x160° optic and 4 standard finishes.



TECHNICAL DATA

Wattage / Input	19W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Die-Cast Aluminum Lens: Polycarbonate Cable Length: 4.92'
CCT	RGBW (W=4000K)
CRI	—
BUG Rating	B0-U1-G0
Delivered Lumens	256 lm: (R) 31 lm, (G) 85 lm, (B) 30 lm, (W) 110 lm (4000K)
Efficacy	13.5 lm/W
Optics	12°x160°
Finishes	4 Standard, Custom RAL on request (4 Stage Marine Grade Finish)
Fixture Dimensions	4.65" w x 3.46" l x 2.60" h
Fixture Weight	1.54 lbs
LED Source	4 RGBW LEDs
Lumen Maintenance	L90, B10 >50,000hrs (Ta 25°C)
Operating Temp.	-4°F to +113°F
IP Rating	IP65
IK Rating	IK06

Fixture Dimensions


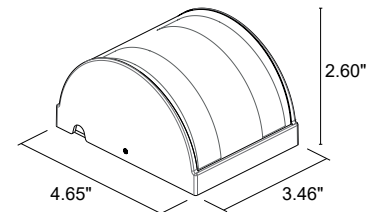


Plate can be adjusted by 5° to align the light beam on the window frame

ORDERING INFORMATION

Example: LY20000P0070UH. Power Supplies and Accessories ordered separately.

LY20000P00	70	U	
Model No.	CCT	Optics	Finish
LY20000P00	70 - RGBW	U - 12°x160°	E - White F - Grey H - Anthracite T - Cor-ten C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


RGBW

Part Number	Description	Input/Output	# of Fixtures
PPLT00288	DMX/RDM(Field Addressable)/Dali/0-10V/4CH	120-277VAC to 24VDC, 100W, Class 2	1-4

For other power supply options consult factory.

ACCESSORIES

Installation

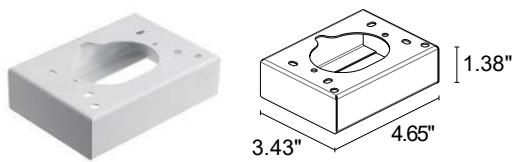


WD0600E - White
WD0600F - Grey
WD0600H - Anthracite
WD0600T - Cor-ten
 Connection housing
 (Lyss 2.0)

PHOTOMETRIC DATA

Note all Photometry is 3000K

U - 12°x160°

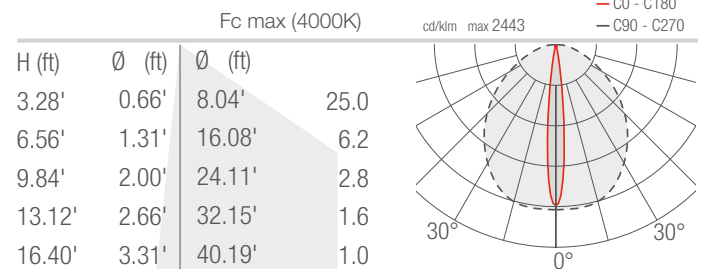

Job Name/Date:

Fixture Type Designation: