

MIN / MAX - LINEA IP67

LIGHT AT MOTION
LAMB32
IDEAS BECOMING LIGHT

designplan®

datasheet


MIN / MAX Linea is a linear, IP67-rated LED luminaire for flush installation on floors in indoor or outdoor areas. It is available in 5 different sizes with antislip glass. Driveover rated up to 11,000 lbs. Pressure switch on request. Can be ordered in IP68 stainless steel version suitable for fountains - see Fountain Lighting section.

TECHNICAL DATA

Wattage / Input	5W, 10W, 15W, 20W, 25W
Power Supply	Remote 24VDC, not included. See page 2.
Construction	Body: Anticorodal Aluminum Protected by 25 Micron Lens: Extra Clear Tempered Glass Cable Length: 1.64'
CCT	2700K, 3000K, 4000K (RGBW or Tunable White on request)
BUG Rating	B0-U3-G0
Delivered Lumens	415-2015 lm (3000K)
Efficacy	80- 93 lm/W (3000K)
Optics	Diffuse
Finishes	Antislip or Sandblasted Glass
Fixture Dimensions	9.8", 19.7", 29.5", 39.4", 49.2" x 3.9" w x 1.6" h
Color Consistency	3-Step MacAdam
IP Rating	IP67
Impact Resistance	IK10
Driveover Capacity	Up to 11,000 lbs



Fixture Dimensions - See page 2

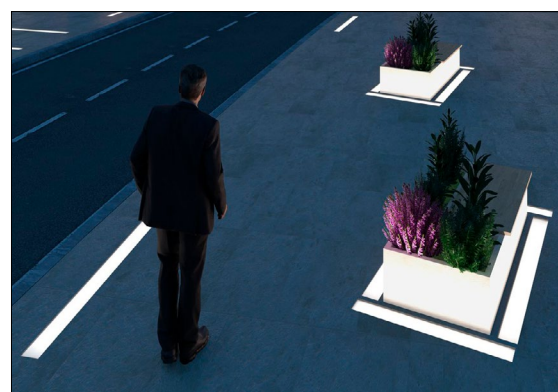

ORDERING INFORMATION


Example: LM07.103903.US.A1.DI.BP. Required Accessories / Power Supplies ordered separately.

		DI	
Model No.	Finish	Optic	CCT
LM07.103841.US (L1 - 5W)	A1 - Antislip Glass	DI - Diffuse	BC - 2700K
LM07.103842.US (L2 - 10W)	60 - Sandblasted Glass		BP - 3000K
LM07.103843.US (L3 - 15W)			BF - 4000K
LM07.103902.US (L4 - 20W)			
LM07.103903.US (L5 - 25W)			

Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

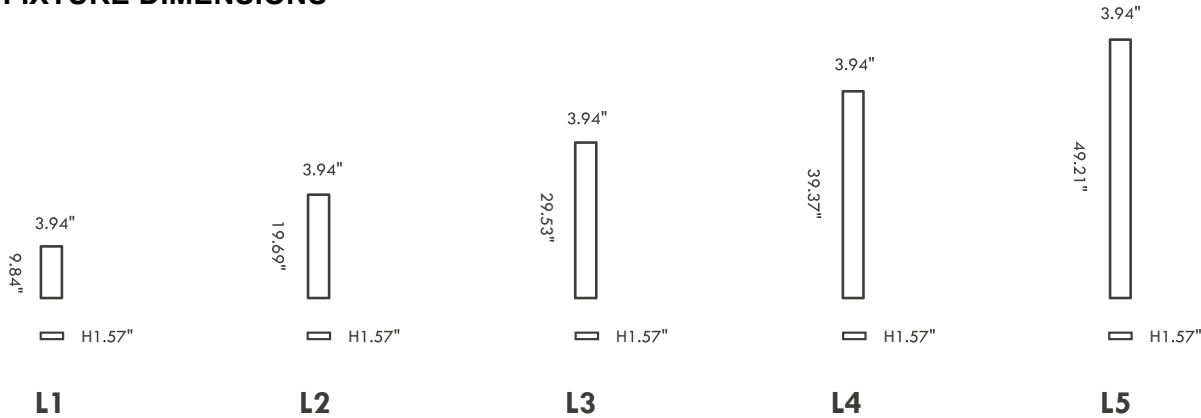

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures				
			L1	L2	L3	L4	L5
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-16	2-8	1-5	1-4	1-3

DRIVER IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures				
			L1	L2	L3	L4	L5
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-15	1-7	1-5	1-3	1-3

For other power supply options consult factory.

REQUIRED WITH HOUSING

ACCESSORIES - Installation



H 3.94"

LM20.103971 (L1 - 4.3" x 10.2" x 3.9" h)
LM20.103972 (L2 - 4.3" x 20.0" x 3.9" h)
LM20.103973 (L3 - 4.3" x 29.8" x 3.9" h)
LM20.103974 (L4 - 4.3" x 39.7" x 3.9" h)
LM20.103975 (L5 - 4.3" x 49.5" x 3.9" h)
 IP67 Housing



LM20.104810
 Light Source Extraction Tool Kit (for L1, L2)

LM20.104464
 Light Source Extraction Tool Kit (for L3, L4, L5)



LM20.103977
 Couple of closing end caps



LM20.104813
 Coupling joint for continuous lines

Job Name/Date:

Fixture Type Designation:

