


MIN / MAX Rettangolo is a rectangular, IP67-rated LED luminaire for flush installation on floors in indoor or outdoor areas. It is available in 5 different sizes with antislip or sandblasted glass. Driveover rated up to 11,000 lbs. Pressure switch on request. Can be ordered in IP68 stainless steel version suitable for fountains - see Fountain Lighting section.



Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage / Input	15W, 31W, 47W, 62W, 77W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anticorodal Aluminum Protected by 25 Micron Lens: Extra Clear Tempered Glass Cable Length: 1.64'
CCT	2700K, 3000K, 4000K (RGBW or Tunable White on request)
BUG Rating	B0-U0-G0
Delivered Lumens	1280-6400 lm (3000K)
Efficacy	82.5-85.3 lm/W (3000K)
Optics	Diffuse
Finishes	Antislip or Sandblasted Glass
Fixture Dimensions	9.8" x 15.9" x 1.6" h (R1) 19.7" x 31.9" x 1.6" h (R2) 29.5" x 47.8" x 1.6" h (R3) 39.4" x 63.8" x 1.6" h (R4) 49.2" x 79.7" x 1.6" h (R5)
Color Consistency	3-Step MacAdam
IP Rating	IP67
Impact Resistance	IK10
Driveover Capacity	Up to 11,000 lbs

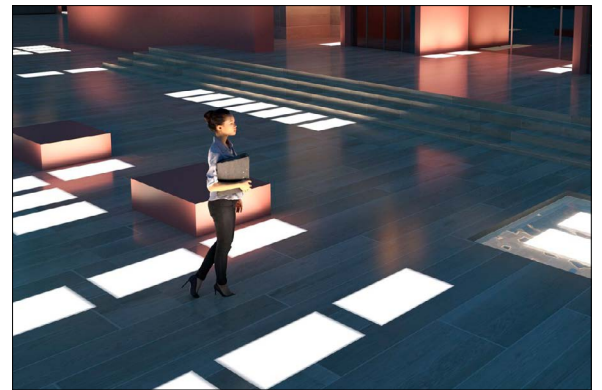

ORDERING INFORMATION


Example: LM07.103898.US.A1.DI.BP. Accessories / Power Supplies ordered separately.

<input type="text"/>	<input type="text"/>	<input type="text" value="DI"/>	<input type="text"/>
Model No.	Finish	Optic	CCT
LM07.103829.US (R1 - 15W)	A1 - Antislip Glass	DI - Diffuse	BC - 2700K
LM07.103830.US (R2 - 31W)	60 - Sandblasted Glass		BP - 3000K
LM07.103831.US (R3 - 47W)			BF - 4000K
LM07.103897.US (R4 - 62W)			
LM07.103898.US (R5 - 77W)			

Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

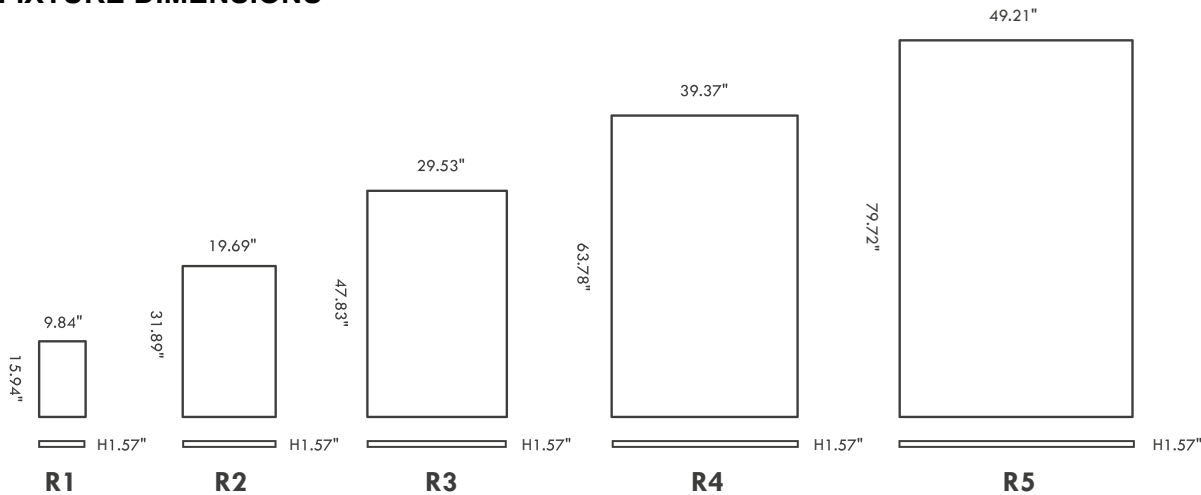

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures				
			R1	R2	R3	R4	R5
PPLT00481	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-1	—	—	—	—
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-3	1-1	1-1	—	—
PPLT00599	ELV/TRIAC & 0-10V Dimming (100-0%)	120-277VAC to 24VDC, 96W, Class 2	1-5	1-2	1-1	1-1	—
PPLT00158	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-5	1-2	1-1	1-1	1-1
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-5	1-2	1-1	1-1	1-1

For other power supply options consult factory.

ACCESSORIES - Installation



LM20.103963 (R1 - 10.2" x 16.3" x 3.9" h)
LM20.103964 (R2 - 20.0" x 32.2" x 3.9" h)
LM20.103965 (R3 - 29.8" x 48.2" x 3.9" h)
LM20.103966 (R4 - 39.7" x 64.1" x 3.9" h)
LM20.103967 (R5 - 49.5" x 80.0" x 3.9" h)
 IP67 Housing



LM20.104763
 Light Source Extraction Tool Kit (R1, R2)
LM20.104811
 Light Source Extraction Tool Kit (R3, R4, R5)

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA

R1

Maximum Candela = 268.3

— C0 - C180
— C90 - C270

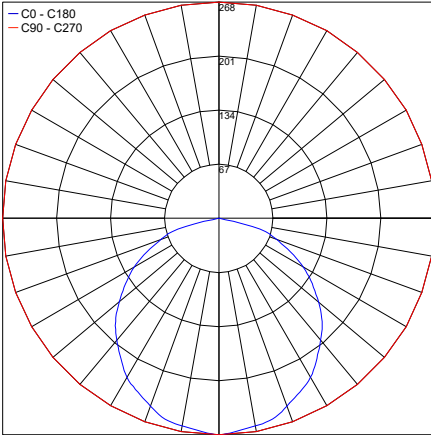


PHOTOMETRIC FILENAME : R1 LM07.103868.XX.DI.XX 9.8X15.9IN IP68.IES

R2

Maximum Candela = 268.3

— C0 - C180
— C90 - C270

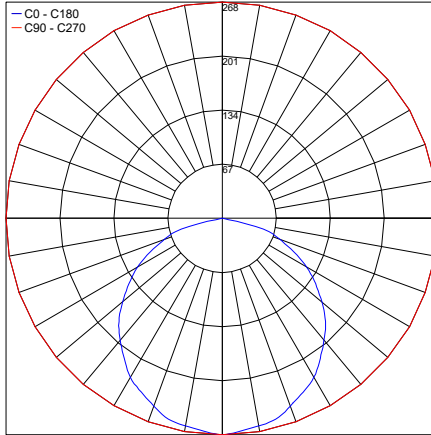


PHOTOMETRIC FILENAME : R2 LM07.103869.XX.DI.XX 19.7X31.9IN IP68.IES

R3

Maximum Candela = 268.3

— C0 - C180
— C90 - C270

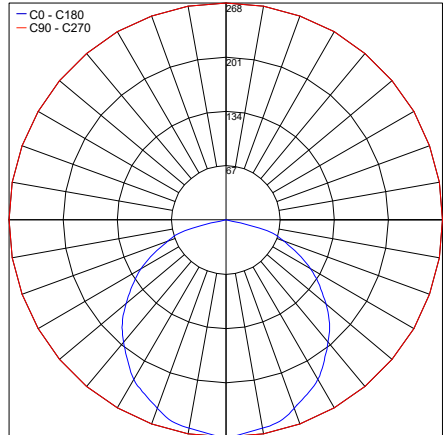


PHOTOMETRIC FILENAME : R3 LM07.103870.XX.DI.XX 29.5X47.8IN IP68.IES

R4

Maximum Candela = 268.3

— C0 - C180
— C90 - C270

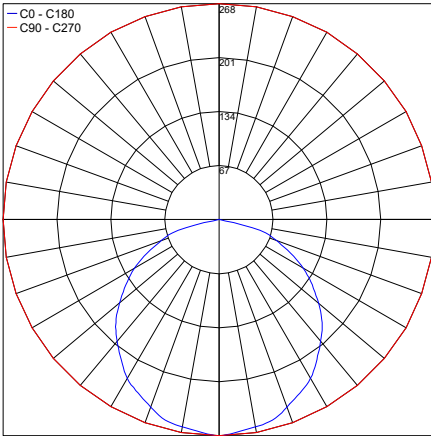


PHOTOMETRIC FILENAME : R4 LM07.103924.XX.DI.XX 39.4X63.8IN IP68.IES

R5

Maximum Candela = 268.3

— C0 - C180
— C90 - C270

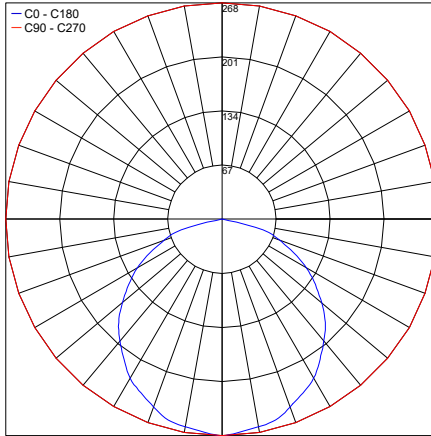

PHOTOMETRIC FILENAME : R5 LM07.103925.XX.DI.XX 49.2X79.7IN IP68.IES

Job Name/Date:

Fixture Type Designation: