

MORPHIS 4 WALL


Morphis 4 Wall is an IP65-rated, wall mounted LED lamp with a 90° arm that is the perfect solution for a variety of outdoor settings. It comes with an opal polycarbonate diffused lens and is available in 6 standard finishes.




TECHNICAL DATA

Wattage / Input	30W (700mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Die-Cast Aluminum Lens: Opal Polycarbonate
CCT	2700K, 3000K, 4000K
CRI	>90
BUG Rating	B1-U1-G1
Delivered Lumens	1550 lm (3000K)
Efficacy	44 lm/W (3000K)
Optics	Diffuse
Finishes	6 Standard, See Below
Fixture Dimensions	21.3" l x 15.0" w x 11.0" head
Lumen Maintenance	L80, B15 >60,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions

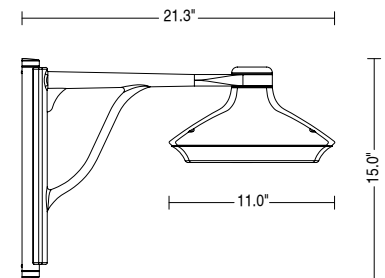

Backplate - see drawing page 2



ORDERING INFORMATION

Example: LNMO42PABDHBDZP.US. Accessories / Power Supplies ordered separately.

LNMO42	PABD		BDZ		US
Model No.	Optics	CCT	BDZ	Finish	
LNMO42	PABD - Extra Clear Diffuse	Y - 2700K H - 3000K N - 4000K	BDZ	G - Black S - Black/Copper P - Black/Green R - Black/Silver L - Graphite V - Oxide	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

700mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00480-P	0-10V Dimming to 0.1%	120-277VAC to 700mA, 30W, Class 2, DAMP	1-1
PPLT00261	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 700mA, 32W, Class 2	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 50W, Class 2, DAMP	1-1

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00181	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 700mA, 38W, Class 2	1-1

For other power supply options consult factory.

ACCESSORIES - Installation




00596-__

Corner Bracket

Add one of the finishes below:

G - Black **R** - Black/Silver
S - Black/Copper **L** - Graphite
P - Black/Green **V** - Oxide

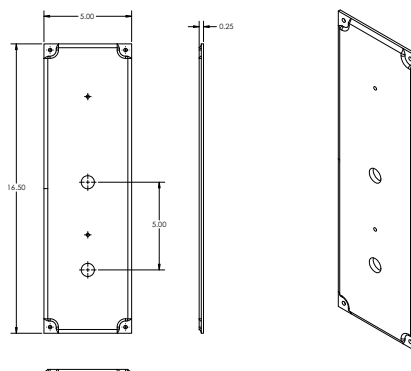


Wall Plate - Included

PHOTOMETRIC DATA


Note: All photometric data is 3000K

Maximum Candela = 537.1

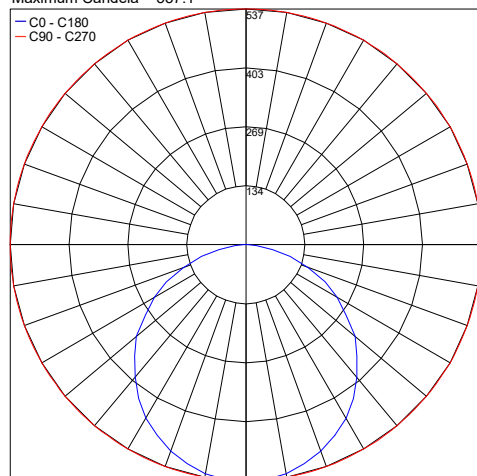

PHOTOMETRIC FILENAME : MORPHIS 4 WALL 3000K MO42XXDHB10X.IES

Maximum Candela = 572

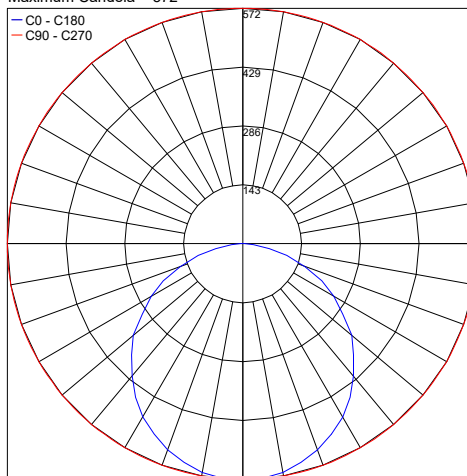

PHOTOMETRIC FILENAME : MORPHIS 4 WALL 4000K MO42XXDHB10X.IES

Job Name/Date:

Fixture Type Designation: