

METOO BOLLARD


designplan®

datasheet

Metoo is a surface mounted bi-directional beam indoor/outdoor fixture made of die-cast aluminum that can be installed as a bollard with the use of a base in two heights. It is available in 4 standard finishes of polyester powder paint with a protective coating treatment. ADA Compliant. **For surface mounted version - see Square Wall or Ceiling section at www.designplan.com.**



Fixture Dimensions

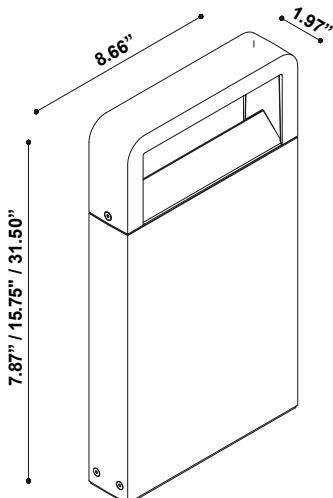

TECHNICAL DATA

Wattage / Input	9W
Power Supply	Remote 24VDC Constant Voltage
Construction	Body: Die-Cast Aluminum Lens: Polycarbonate Paint: Double Layer Polyester Powder Coat and Protective Chemical Treatment
CCT	2700K, 3000K
Delivered Lumens	468 lm (3000K)
Efficacy	52 lm/W
Optics	Fixed
BUG Rating	B0-U3-G0
LED Source	Mid Power LEDs
Finishes	5 Standard, See Below
Fixture Dimensions	1.97" w x 8.66" l x 7.87" or 15.75" h
IP Rating	IP65
Impact Resistance	IK08

ORDERING INFORMATION

Example: D900231015.US Power Supplies ordered separately.

D9002				.	US
Model No.	CCT	Height	Finish		
D9002	310 - 2700K 110 - 3000K	1 - 7.87" h 2 - 15.75" h 3 - 31.50" h	2 - White 3 - Sand 4 - Graphite 5 - Aluminum 8 - Corten	US	



Job Name/Date:

Fixture Type Designation:

sales@designplan.com
www.designplan.com

79 Trenton Avenue, Frenchtown NJ 08825
© Copyright 2019 Designplan Lighting, Inc.
Published: January 16, 2026

P: 908-996-7710
F: 908-996-7042
1 of 3

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-8
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-8

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC , 96W, Class 2	1-8

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-8

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

ACCESSORIES




Anchor Bolts

D9042

For ground installation

PHOTOMETRIC DATA

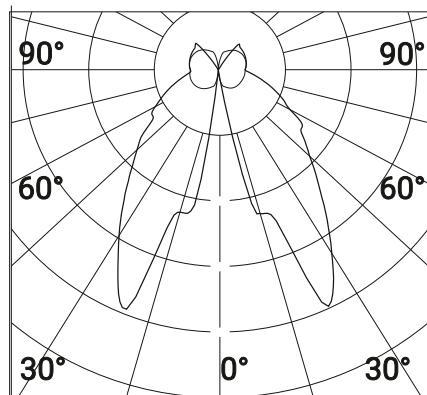

FINISHES



white



sand



graphite



aluminum



corten

Job Name/Date:

Fixture Type Designation: