


Metoo is a surface mounted bi-directional beam fixture made of die-cast aluminum and a polycarbonate lens that can be used as a wall, ceiling or bollard light for indoor or outdoor. It is available in 5 standard finishes of polyester powder paint with a protective chemical treatment. ADA Compliant.
For bollard parts - see Bollards section at www.designplan.com.



TECHNICAL DATA

Wattage / Input	9W
Power Supply	Remote 24VDC Constant Voltage
Construction	Body: Die-Cast Aluminum Lens: Polycarbonate Paint: Double Layer Polyester Powder Coat and Protective Chemical Treatment
CCT	2700K, 3000K, 4000K
Delivered Lumens	468 lm (3000K)
Efficacy	52 lm/W
Optics	Fixed
BUG Rating	B0-U3-G0
LED Source	Mid Power LEDs
Finishes	5 Standard, See Below
Fixture Dimensions	1.97" w x 3.94" l x 8.66" h
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions



ORDERING INFORMATION

Example: D900211045.US Power Supplies ordered separately.

D9002			US
Model No.	CCT	Finish	
D9002	310 - 2700K	42 - White	US
	110 - 3000K	43 - Sand	
	210 - 4000K	44 - Graphite	
		45 - Aluminum	
		48 - Corten	

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-1
PPLT00155	Non-Dim	120VAC to 24VDC, 30W, Class 2, IP66	1-2
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-5
PPLT00599	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-8
PPLT00158	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-8
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-8

For other power supply options consult factory.

FINISHES



white



sand



graphite




aluminum



corten

PHOTOMETRIC DATA

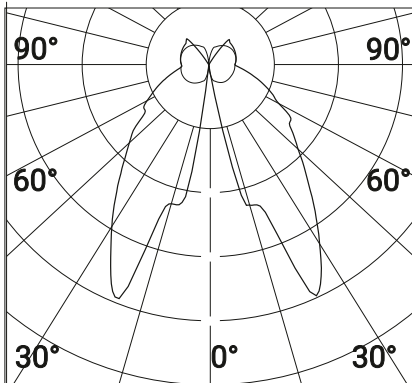

Job Name/Date:

Fixture Type Designation: