


Metoo is a surface mounted bi-directional beam fixture made of die-cast aluminum and a polycarbonate lens that can be used as a wall, ceiling or bollard light for indoor or outdoor. It is available in 5 standard finishes of polyester powder paint with a protective chemical treatment. ADA Compliant.
For bollard parts - see Bollards section at www.designplan.com.



TECHNICAL DATA

Wattage / Input	9W
Power Supply	Remote 24VDC Constant Voltage
Construction	Body: Die-Cast Aluminum Lens: Polycarbonate Paint: Double Layer Polyester Powder Coat and Protective Chemical Treatment
CCT	2700K, 3000K, 4000K
Delivered Lumens	468 lm (3000K)
Efficacy	52 lm/W
Optics	Fixed
BUG Rating	B0-U3-G0
LED Source	Mid Power LEDs
Finishes	5 Standard, See Below
Fixture Dimensions	1.97" w x 3.94" l x 8.66" h
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions



ORDERING INFORMATION

Example: D900211045.US Power Supplies ordered separately.

D9002			US
Model No.	CCT	Finish	
D9002	310 - 2700K 110 - 3000K 210 - 4000K	42 - White 43 - Sand 44 - Graphite 45 - Aluminum 48 - Corten	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00586	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-3
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-8

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-8

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures 9W
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-8

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

FINISHES



white



sand



graphite




aluminum



corten

PHOTOMETRIC DATA

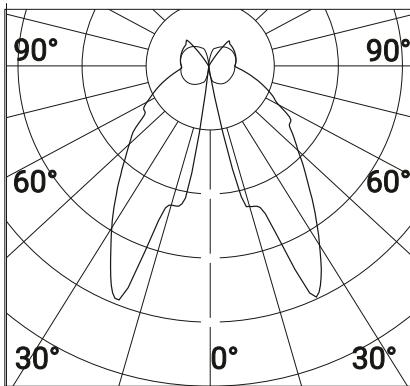

Job Name/Date:

Fixture Type Designation: