

MICRO ECLIPS

TORSION


Micro Eclips is a small, recessed LED downlight suitable for indoor installation on ceilings that is tiltable to 30°. It is available in 2 color temperatures and 6 standard finishes.



TECHNICAL DATA

Wattage / Input	3.82W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum
CCT	2700K, 3000K (4000K on request)
CRI	>90
Delivered Lumens	429 lm (3000K)
Efficacy	112.3 lm/W (3000K)
Optics	36°
Finishes	6 Standard, See Below
LED Source	LUXEON M
Fixture Dimensions	Ø2.52" x 1.97"
Cutout Dimensions	Ø2.20"
Installation Depth	2.56" solid ceilings
Fixture Weight	0.44 lbs
IP Rating	IP20

Fixture Dimensions



ORDERING INFORMATION

Example: T497147. Power Supplies sold separately - See page 2.

Model No.	Description	Model No.	Description
T497147	Torsion, 2700K, Text. White	T497137	Torsion, 3000K, Text. White
T497126	Torsion, 2700K, Text. Black	T497116	Torsion, 3000K, Text. Black
T497192	Torsion, 2700K, Text. White + Gold Focus	T497182	Torsion, 3000K, Text. White + Gold Focus
T497194	Torsion, 2700K, Text. White + Black Focus	T497184	Torsion, 3000K, Text. White + Black Focus
T497195	Torsion, 2700K, Text. Black + White Front	T497185	Torsion, 3000K, Text. Black + White Front
T497196	Torsion, 2700K, Black + Gold	T497186	Torsion, 3000K, Black + Gold

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00148	0-10V Dimming (to 10%)	120-277VAC to 350mA, 6W, Class 2	1-1
PPLT00496	Phase Dimming (120V Only)	120VAC to 350mA, 12W, Class 2	1-2
PPLT00308-P	0-10V Dimming (to 0.1%)	120-277VAC to 350mA, 30W, Class 2	1-4
PPLT00467-P	0-10V Dimming (to 1.0%)	120-277VAC to 350mA, 50W, Class 2	1-4
PPLT00538-P	0-10V Dimming (to 0.1%)	120-277VAC to 350mA, 100W, Class 2	1-16

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-3
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	3-4

For other power supply options consult factory.


ACCESSORIES - Installation

T178000

Installation Box for Plaster

PHOTOMETRIC DATA

Note all Photometry is 2700K

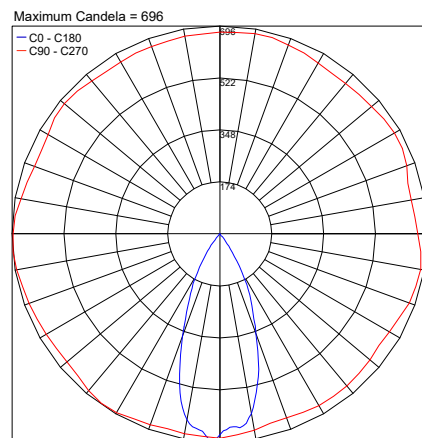

Job Name/Date:

Fixture Type Designation: