


Micro Scoop is a small indoor cylindrical downlight that consists of two equal parts, one part for mounting on the ceiling or wall and one with an integral LED, that can be fully tilted so you can easily direct the light to specific objects and places. It can be rotated 355° and tilted 90°. This is a Class 2, low voltage fixture and does not require a junction box.



## TECHNICAL DATA

<b>Wattage / Input</b>	3.8W (350mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>CCT</b>	2700K, 3000K
<b>CRI</b>	>90
<b>Delivered Lumens</b>	400 lm per beam (2700K)
<b>Efficacy</b>	105.3 lm/W per beam (2700K)
<b>Optics</b>	36°
<b>Finishes</b>	10 standard, see below
<b>LED Source</b>	LUXEON M LED
<b>Fixture Dimensions</b>	Ø1.38" x 4.53" h
<b>Fixture Weight</b>	0.66 lbs
<b>IP Rating</b>	IP20

Fixture Dimensions



## ORDERING INFORMATION

*Example: T407095. Power Supplies ordered separately.*



Model No.	Description - 2700K
<b>T407044</b>	2700K - Anodic Bronze
<b>T407045</b>	2700K - Anodic Brown
<b>T407015</b>	2700K - Brushed Bronze Anodized
<b>T407013</b>	2700K - Brushed Gold Anodized
<b>T407014</b>	2700K - Brushed Titanium Anodized
<b>T407096</b>	2700K - Black + Gold
<b>T407057</b>	2700K - CU <sub>29</sub> + Textured Black Focus
<b>T407027</b>	2700K - Textured White
<b>T407026</b>	2700K - Textured Black
<b>T407095</b>	2700K - Textured White + Black

Model No.	Description - 3000K
<b>T407244</b>	3000K - Anodic Bronze
<b>T407245</b>	3000K - Anodic Brown
<b>T407215</b>	3000K - Brushed Bronze Anodized
<b>T407213</b>	3000K - Brushed Gold Anodized
<b>T407214</b>	3000K - Brushed Titanium Anodized
<b>T407296</b>	3000K - Black + Gold
<b>T407257</b>	3000K - CU <sub>29</sub> + Textured Black Focus
<b>T407227</b>	3000K - Textured White
<b>T407226</b>	3000K - Textured Black
<b>T407295</b>	3000K, Textured White + Black

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00496</a>	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-2
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2, DAMP	1-4
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2, DAMP	1-4
<a href="#">PPLT00168-P</a>	0-10V Dimming to 1.0% (2 channels)	120-277VAC to 350mA, 50W, Class 2	1-8
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W, Class 2	1-16

## Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00247</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-3
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	3-4

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note: Photometry is 2700K

Maximum Candela = 696

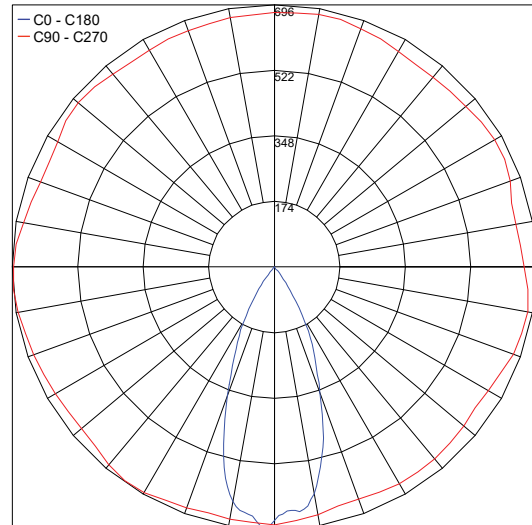

PHOTOMETRIC FILENAME : MICROSCOOP.LDT

Job Name/Date:

Fixture Type Designation: