


Micro Scoop is a small indoor cylindrical downlight that consists of two equal parts, one part for mounting on the ceiling or wall and one with an integral LED, that can be fully tilted so you can easily direct the light to specific objects and places. It can be rotated 355° and tilted 90°. This is a Class 2, low voltage fixture and does not require a junction box.



TECHNICAL DATA

Wattage / Input	3.8W (350mA)
Power Supply	Remote, not included. See page 2.
CCT	2700K, 3000K
CRI	>90
Delivered Lumens	400 lm per beam (2700K)
Efficacy	105.3 lm/W per beam (2700K)
Optics	15°, 36°, 50°
Finishes	8 Standard, see below
LED Source	BRIDGELUX LED
Fixture Dimensions	Ø1.38" x 4.53" h
Fixture Weight	0.66 lbs
IP Rating	IP20

Fixture Dimensions



ORDERING INFORMATION

Example: T607096-W. Power Supplies ordered separately.

--	--

Model No. - Description	Optics
T607015 2700K - Brushed Bronze Anodized	N - 15°
T607013 2700K - Brushed Gold Anodized	M - 36
T607014 2700K - Brushed Titanium Anodized	W - 50°
T607057 2700K - Red Copper	
T607096 2700K - Textured Black + Gold Anodized	
T607026 2700K - Textured Black + Black	
T607027 2700K - Textured White + White	
T607095 2700K - Textured White + Black	
T607015 3000K - Brushed Bronze Anodized	
T607213 3000K - Brushed Gold Anodized	
T607214 3000K - Brushed Titanium Anodized	
T607257 3000K - Red Copper	
T607296 3000K - Textured Black + Gold Anodized	
T607226 3000K - Textured Black + Black	
T607227 3000K - Textured White + White	
T607295 3000K, Textured White + Black	

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA


Part Number	Description	Input/Output	# of Fixtures
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-2
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2, DAMP	1-4
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2, DAMP	1-4
PPLT00168-P	0-10V Dimming to 1.0% (2 channels)	120-277VAC to 350mA, 50W, Class 2	1-8
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W, Class 2	1-16

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-3
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	3-4

For other power supply options consult factory.

ACCESSORIES - Installation



+



T407926

Wall Adapter - Textured Black


T407947

Wall Adapter - Textured White

PHOTOMETRIC DATA

Note: Photometry is 2700K

Maximum Candela = 696

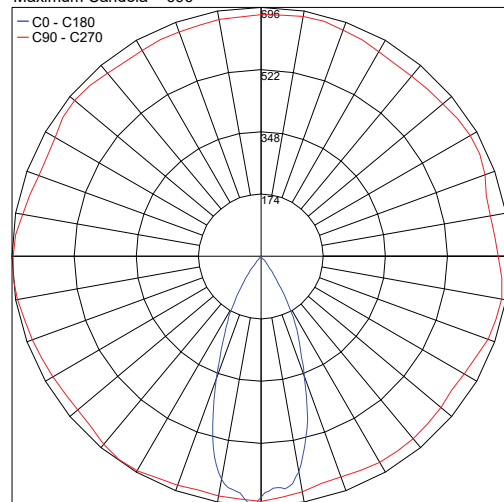

PHOTOMETRIC FILENAME : MICROSCOOP.LDT

Job Name/Date:

Fixture Type Designation: