


Micro Scoop is a small indoor cylindrical downlight that consists of two equal parts, one part for mounting on the ceiling or wall and one with an integral LED, that can be fully tilted so you can easily direct the light to specific objects and places. It can be rotated 355° and tilted 90°. This is a Class 2, low voltage fixture and does not require a junction box.



TECHNICAL DATA

Wattage / Input	3.8W (350mA)
Power Supply	Remote, not included. See page 2.
CCT	2700K, 3000K
CRI	>90
Delivered Lumens	400 lm per beam (2700K)
Efficacy	105.3 lm/W per beam (2700K)
Optics	36°
Finishes	5 standard, see below
LED Source	LUXEON M LED
Fixture Dimensions	Ø1.38" x 4.53" h
Fixture Weight	0.66 lbs
IP Rating	IP20

Fixture Dimensions



ORDERING INFORMATION

Example: T407095. Power Supplies ordered separately.

Model No.	Description - 2700K
T407027	2700K, Textured White
T407026	2700K, Textured Black
T407095	2700K, Textured White + Black
T407096	2700K, Black + Gold
T407057	2700K, CU ₂₉ + Black Focus

Model No.	Description - 3000K
T407227	3000K, Textured White
T407226	3000K, Textured Black
T407295	3000K, Textured White + Black
T407296	3000K, Black + Gold
T407257	3000K, CU ₂₉ + Black Focus

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2	1-2
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-4
PPLT00168-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2	1-8
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-16


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00252	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only)	120VAC to 350mA, 7W, Class 2	1-1
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1
PPLT00271	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only)	120VAC to 350mA, 13W, Class 2	2-3
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-3
PPLT00220	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only)	120VAC to 350mA, 19W, Class 2	3-4
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	3-4

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: Photometry is 2700K

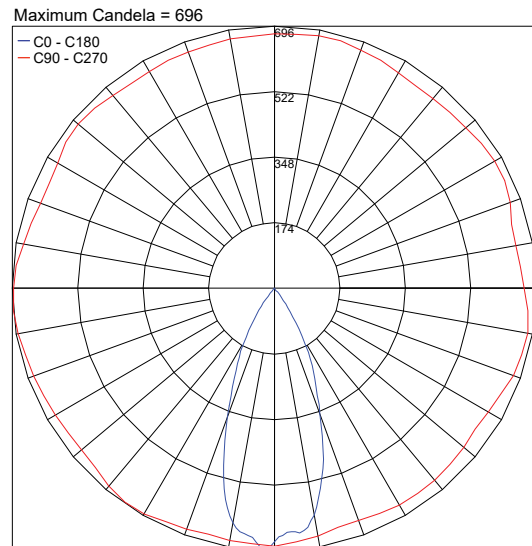

PHOTOMETRIC FILENAME : MICROSCOOP.LDT

Job Name/Date:

Fixture Type Designation: