

MICRO TOMMY 1 IP54


Micro Tommy is a group of square recessed downlights available in 3 sizes offering LED power in a pocket size. Micro Tommy 1 IP54 is the outdoor single LED version available in 2 color temperatures, 3 optics options and 5 standard finishes with an IP rating of IP54.




TECHNICAL DATA

| | |
|---------------------------|-----------------------------------|
| Wattage / Input | 4W (350mA) |
| Power Supply | Remote, not included. See page 2. |
| CCT | 2700K, 3000K |
| CRI | >90 |
| Delivered Lumens | 342 lm (3000K) |
| Efficacy | 90 lm/W (3000K) |
| Optics | 15°, 36°, 50° |
| Finishes | 5 standard, see below |
| LED Source | BRIDGELUX LED |
| Fixture Dimensions | 2.36" l x 2.36" w x 2.24" h |
| Cutout Dimensions | 2.05" x 2.05" (height 2.36") |
| Fixture Weight | 0.44 lbs |
| IP Rating | IP54 |

Fixture Dimensions



MICRO TOMMY 1 LEAF



MICRO TOMMY 1 TORSION

ORDERING INFORMATION

Example: T672192W. Power Supplies / Accessories ordered separately.

| Model No. | Description | Optics |
|-----------|---|---------|
| T672147 | 2700K, Textured White + White Focus | N - 15° |
| T672194 | 2700K, Textured White + Black Focus | M - 36 |
| T672192 | 2700K, Textured White + Gold Anodized Focus | W - 50° |
| T672126 | 2700K, Textured Black + Black Focus | |
| T672196 | 2700K, Textured Black + Gold Anodized Focus | |
| T672137 | 3000K, Textured White + White Focus | |
| T672184 | 3000K, Textured White + Black Focus | |
| T672182 | 3000K, Textured White + Gold Anodized Focus | |
| T672116 | 3000K, Textured Black + Black Focus | |
| T672186 | 3000K, Textured Black + Gold Anodized Focus | |

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA


| Part Number | Description | Input/Output | # of Fixtures |
|-----------------------------|-----------------------|------------------------------------|---------------|
| PPLT00496 | Phase Dim (120V only) | 120VAC to 350mA, 12W, Class 2 | 1-2 |
| PPLT00467-P | 0-10V Dimming to 1.0% | 120-277VAC to 350mA, 50W, Class 2 | 1-4 |
| PPLT00561-P | 0-10V Dimming to 0.1% | 120-277VAC to 350mA, 100W, Class 2 | 1-4 |

Suggested Lutron Compatible

| Part Number | Option | Lutron SKU | Dim Range | Description | Input/Output | # of Fixtures |
|---------------------------|----------------|------------|-----------|--|-----------------------------------|---------------|
| PPLT00247 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 7W, Class 2 | 1-1 |
| PPLT00516 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 13W, Class 2 | 2-2 |
| PPLT00179 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 19W, Class 2 | 3-4 |


For other power supply options consult factory.

ACCESSORIES - Installation

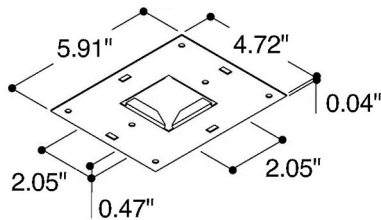

T419199

Installation Frame for Plaster
Cutout 5.51" x 3.35" x 2.36" h

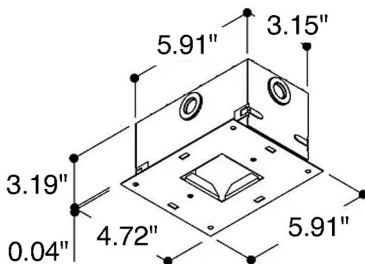


T419197

Installation Box for Plaster Finish
Cutout 6.10" x 3.35" x 3.54" h

PHOTOMETRIC DATA

Note all Photometry is 3000K

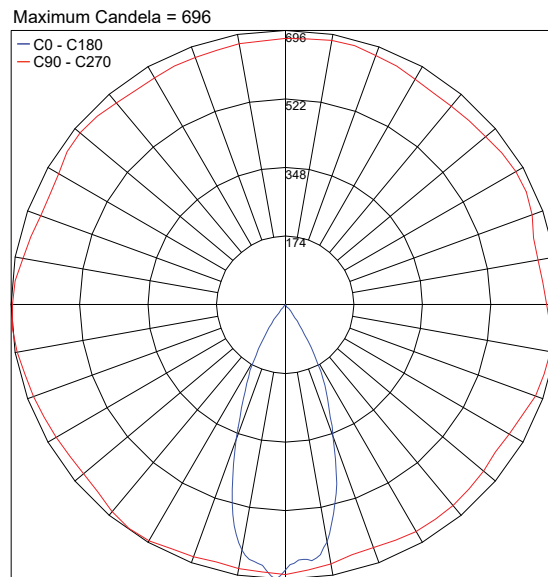

PHOTOMETRIC FILENAME : MICRO TOMMY 1 3.8W 3000K 36°.IES

Job Name/Date:

Fixture Type Designation: