

MICRO TOMMY 3


Micro Tommy is an indoor recessed downlight, available in 3 sizes, that is a member of the Think Small collection offering LED power in a pocket size. Micro Tommy 3 is the double LED version available in 2 styles, Torsion or Leaf, 2 color temperatures with a 36° optic - adjustable 35-20° and 5 finish options.




TECHNICAL DATA

Wattage / Input	3 x 4W (350mA)
Power Supply	Remote, not included. See page 2.
CCT	2700K, 3000K
CRI	>90
Delivered Lumens	342 lm per beam (3000K)
Efficacy	90 lm/W per beam (3000K)
Optics	36° beam
Finishes	5 standard, see below
LED Source	3 LUXEON M LED
Fixture Dimensions	6.61" l x 2.36" w x 2.24" h
Cutout Dimensions	6.38" x 2.05" (height 2.36")
Fixture Weight	0.88 lbs
IP Rating	IP20

Fixture Dimensions



MICRO TOMMY 3 LEAF



MICRO TOMMY 3 TORSION

ORDERING INFORMATION

Example: T419626. Power Supplies ordered separately.

Model No.	Description
T419347	Torsion, 2700K, Textured White
T419326	Torsion, 2700K, Textured Black
T419394	Torsion, 2700K, Textured White & Black Focus
T419395	Torsion, 2700K, Textured Black & White Front
T419396	Torsion, 2700K, Black & Gold
T419337	Torsion, 3000K, Textured White
T419316	Torsion, 3000K, Textured Black
T419384	Torsion, 3000K, Textured White & Black Focus
T419385	Torsion, 3000K, Textured Black & White Front
T419386	Torsion, 3000K, Black & Gold

Model No.	Description
T419647	Leaf, 2700K, Textured White
T419626	Leaf, 2700K, Textured Black
T419694	Leaf, 2700K, Textured White & Black Focus
T419695	Leaf, 2700K, Textured Black & White Front
T419696	Leaf, 2700K, Black & Gold
T419637	Leaf, 3000K, Textured White
T419616	Leaf, 3000K, Textured Black
T419684	Leaf, 3000K, Textured White & Black Focus
T419685	Leaf, 3000K, Textured Black & White Front
T419686	Leaf, 3000K, Black & Gold

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1
PPLT00280	0-10V Dimming to 1.0%	120-277VAC to 350mA, 30W, Class 2	1-1
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-1
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-2

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	1-1

For other power supply options consult factory.

ACCESSORIES - Installation

T419399

Installation Frame for Plaster - cutout 10.24" x 9.25" x H2.36"


T419397

Installation Box for Plaster Finish - cutout 10.24" x 9.25" x H5.91"

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 2088

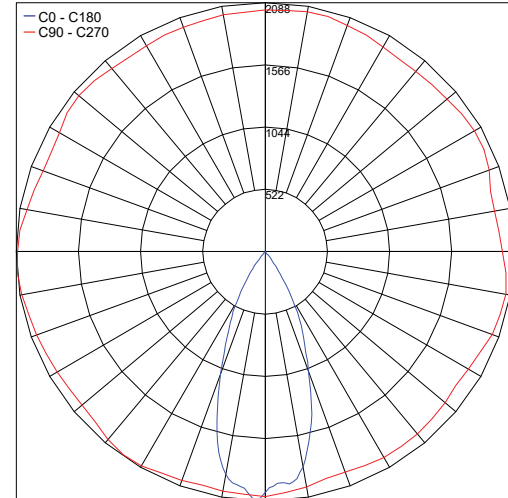

PHOTOMETRIC FILENAME : MICRO TOMMY 3 TORSION 12W 3000K.IES

Job Name/Date:

Fixture Type Designation: