



Mikado is a tubular pendant light with a diameter of 0.7" made for indoor installation. In spite of its small size, it has a high lumen output and a length of 4.92'. Available in 3000K (2700K, 4000K on request), and a black finish.

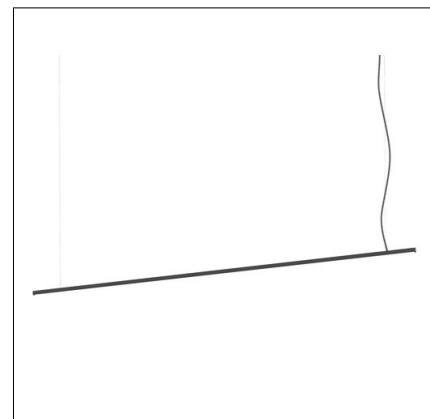

TECHNICAL DATA

Wattage / Input	30W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum Lens: Opal Diffused Satin
CCT	3000K (2700K, 4000K on request)
CRI	>90
LED Lumens	1828 lm (3000K)
Efficacy	60.9 lm/W (3000K)
Optics	Diffuse
Finishes	Black Anodized
Fixture Dimensions	59.06" l x 0.67" w x 0.59" h
Cutout Dimensions	Ø2.17"
Cable Length	6.56" max length
Fixture Weight	3.31 lbs
IP Rating	IP40

Fixture Dimensions

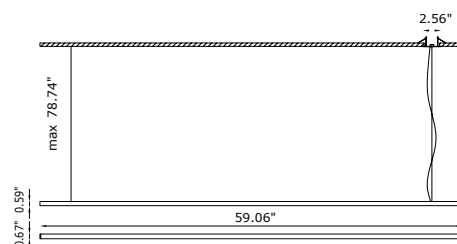

BU1136

Does not require a J-Box

ORDERING INFORMATION

Example: BU1136 BL 4 S 00 M 30 ND.US Power supplies ordered separately.

BU1136	BL	4 S 00		.US
Model No.	Finish	Optics	CCT	
BU1136	BL - Black	4 S 00	M 30 ND - 3000K (standard) M 27 ND - 2700K (on request) M 40 ND - 4000K (on request)	.US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-2
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-2

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DA3W / L3DAE	L3DA	100%-1%	Hi-Lume™ 1% 3-Wire or EcoSystem™ LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-2

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715


Part Number	Description	Input/Output	# of Fixtures 30W
PPLT00715	ELV / TRIAC / 0-10V Dimming	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-2

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: all photometry is 3000K

Maximum Candela = 687.2

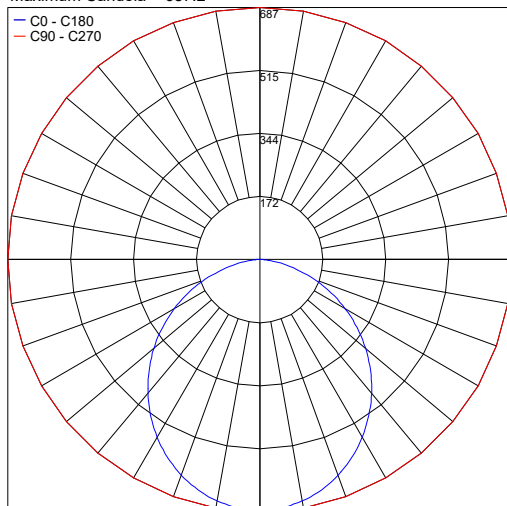

PHOTOMETRIC FILENAME : MIKADO BU1135BL4S00E30ND 30W 3000K.IES

Job Name/Date:

Fixture Type Designation: