



Mikado is a tubular pendant light with a diameter of 0.7" made for indoor installation. In spite of its small size, it has a high lumen output and a length of 4.92'. Available in 3000K (2700K, 4000K on request), and a black finish.

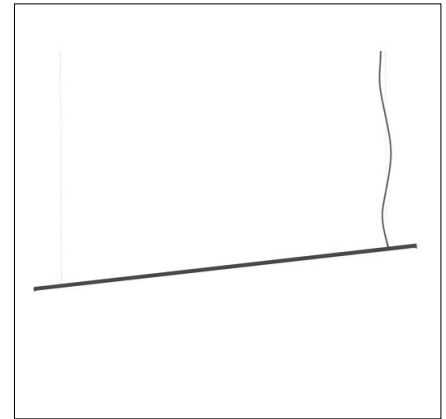

TECHNICAL DATA

| | |
|---------------------------|---|
| Wattage / Input | 30W (24VDC) |
| Power Supply | Remote, not included. See page 2. |
| Construction | Body: Aluminum Lens: Opal Diffused Satin |
| CCT | 3000K (2700K, 4000K on request) |
| CRI | >90 |
| LED Lumens | 1828 lm (3000K) |
| Efficacy | 60.9 lm/W (3000K) |
| Optics | Diffuse |
| Finishes | Black Anodized |
| Fixture Dimensions | 59.06" l x 0.67" w x 0.59" h |
| Cutout Dimensions | Ø2.17" |
| Cable Length | 6.56" max length |
| Fixture Weight | 3.31 lbs |
| IP Rating | IP40 |

Fixture Dimensions

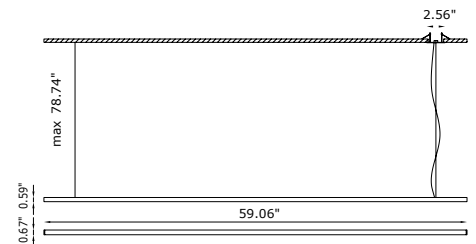

BU1136

Does not require a J-Box

ORDERING INFORMATION

Example: BU1136 BL 4 S 00 M 30 ND.US Power supplies ordered separately.

| | | | | |
|------------------|---------------|---------------|--|-----|
| BU1136 | BL | 4 S 00 | | .US |
| Model No. | Finish | Optics | CCT | |
| BU1136 | BL - Black | 4 S 00 | M 30 ND - 3000K (standard) M 27 ND - 2700K (on request) M 40 ND - 4000K (on request) | .US |

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

| Part Number | Description | Input/Output | Fixtures |
|---------------------------|---|------------------------------------|----------|
| PPLT00284 | Non-Dim | 120-277VAC to 24VDC, 100W, Class 2 | 1-2 |
| PPLT00543 | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2 | 1-2 |

Suggested Lutron Compatible

| Part Number | Option | Lutron SKU | Dim Range | Description | Input/Output | # of Fixtures |
|---------------------------|----------------|------------|-----------|---|-----------------------------------|---------------|
| PPLT00530 | L3DA3W / L3DAE | L3DA | 100%-1% | Hi-Lume™ 1% 3-Wire or EcoSystem™ LED Driver | 120-277VAC to 24VDC, 96W, Class 2 | 1-2 |

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715


| Part Number | Description | Input/Output | # of Fixtures 30W |
|---------------------------|-------------------------------------|---|----------------------|
| PPLT00715 | ELV / TRIAC / 0-10V Dimming to 0.1% | 120-277VAC to 24VDC, 96W, Class 2, WET/DAMP | 1-2 |

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: all photometry is 3000K

Maximum Candela = 687.2

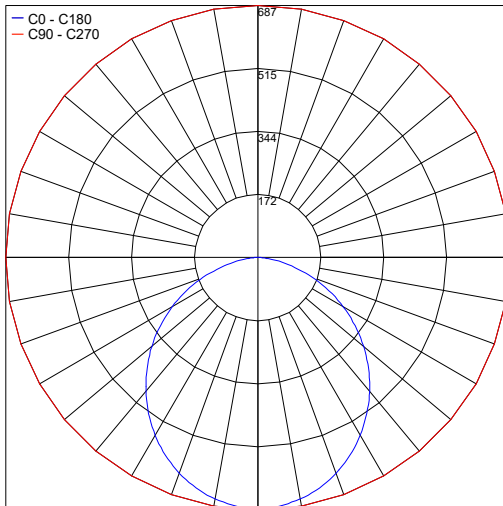

PHOTOMETRIC FILENAME : MIKADO BU1135BL4S00E30ND 30W 3000K.IES

Job Name/Date:

Fixture Type Designation: