



Mikado is a tubular pendant light with a diameter of 0.7" made for indoor installation. In spite of its small size, it has a high lumen output and a length of 4.92'. Available in 3000K (2700K, 4000K on request), and a black finish.

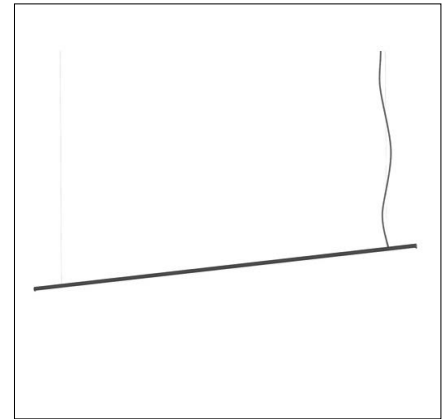

## TECHNICAL DATA

<b>Wattage / Input</b>	30W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Aluminum Lens: Opal Diffused Satin
<b>CCT</b>	3000K (2700K, 4000K on request)
<b>CRI</b>	>90
<b>LED Lumens</b>	1828 lm (3000K)
<b>Efficacy</b>	60.9 lm/W (3000K)
<b>Optics</b>	Diffuse
<b>Finishes</b>	Black Anodized
<b>Fixture Dimensions</b>	59.06" l x 0.67" w x 0.59" h
<b>Cutout Dimensions</b>	Ø2.17"
<b>Cable Length</b>	6.56" max length
<b>Fixture Weight</b>	3.31 lbs
<b>IP Rating</b>	IP40

Fixture Dimensions

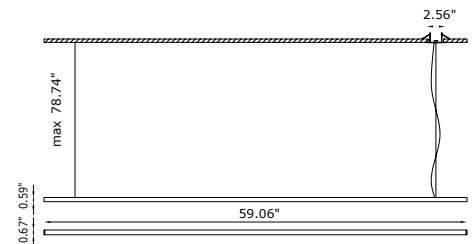

BU1136

**Does not require a J-Box**

## ORDERING INFORMATION

*Example: BU1136 BL 4 S 00 M 30 ND.US Power supplies ordered separately.*

BU1136	BL	4 S 00		.US
<b>Model No.</b>	<b>Finish</b>	<b>Optics</b>	<b>CCT</b>	
BU1136	BL - Black	4 S 00	M 30 ND - 3000K (standard) M 27 ND - 2700K (on request) M 40 ND - 4000K (on request)	.US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	Fixtures
<a href="#">PPLT00157</a>	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-1
<a href="#">PPLT00090</a>	Non-Dim	120VAC to 24VDC, 75W, Class 2	1-2
<a href="#">PPLT00599</a>	ELV / TRIAC & 0-10V Dimming (100-0%)	120-277VAC to 24VDC 96W, Class 2	1-2
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-2
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-2

## Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00273</a>	L3DA3W / L3DAE	L3DA	100%-1%	Hi-Lume™ 1% 3-Wire or EcoSystem™ LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-1
<a href="#">PPLT00530</a>	L3DA3W / L3DAE	L3DA	100%-1%	Hi-Lume™ 1% 3-Wire or EcoSystem™ LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-3

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note: all photometry is 3000K

Maximum Candela = 687.2

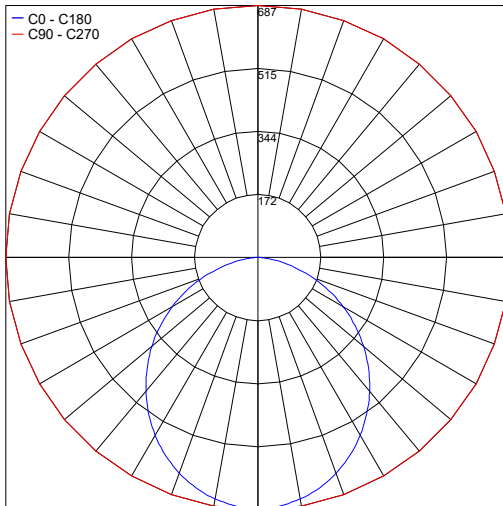

PHOTOMETRIC FILENAME : MIKADO BU1135BL4S00E30ND 30W 3000K.IES

Job Name/Date:

Fixture Type Designation: