
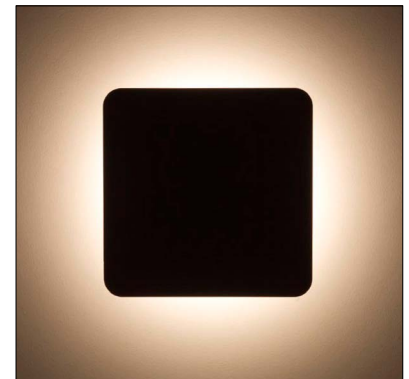


Mimicry is a round or square wall-mounted, IP65-rated LED luminaire with 360° radial light emission, suitable for outdoor installation. With a cover made of a partially porous natural material, it is resistant to the most extreme weather conditions and paintable with waterbased colors, giving the possibility of either a perfectly integrated fixture or a contrasting one with the aesthetics of the facade.

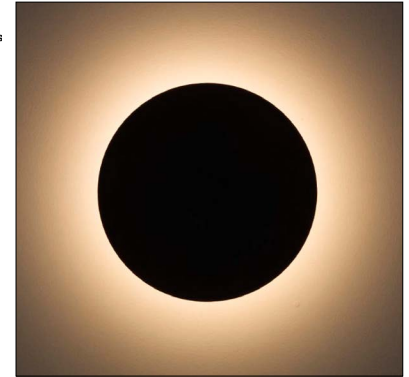

ADA Compliant

TECHNICAL DATA

Wattage / Input	13W (120-277VAC)
Power Supply	Integral 0-10V Dimming
Construction	Body: Die-Cast Aluminum Lens: UV Stabilized Optical Polycarbonate Wall Fixing Bracket: Stainless Steel
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U3-G1 (3000K)
Delivered Lumens	900 lm (3000K) 945 lm (4000K)
Efficacy	90 lm/W (3000K) 94.5 lm/W (4000K)
Optics	360°
Finishes	Paintable Porous Natural Clay Material
Fixture Dimensions	Ø8.7" x 2.6" w (Round) 8.7" x 8.7" (Square)
IP Rating	IP65



ORDERING INFORMATION

Example: D901822010.US.

Model No.

- D901832000.US** - Round 2700K - Integral 0-10V Dimming
- D901812000.US** - Round 3000K - Integral 0-10V Dimming
- D901822000.US** - Round 4000K - Integral 0-10V Dimming
- D901832010.US** - Square 2700K - Integral 0-10V Dimming
- D901812010.US** - Square 3000K - Integral 0-10V Dimming
- D901822010.US** - Square 4000K - Integral 0-10V Dimming

Fixture Dimensions

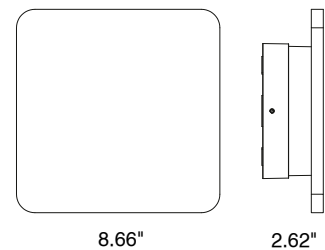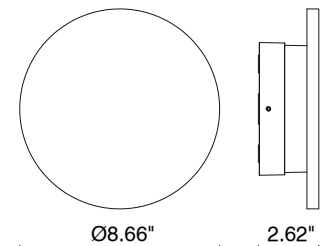


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 115.9

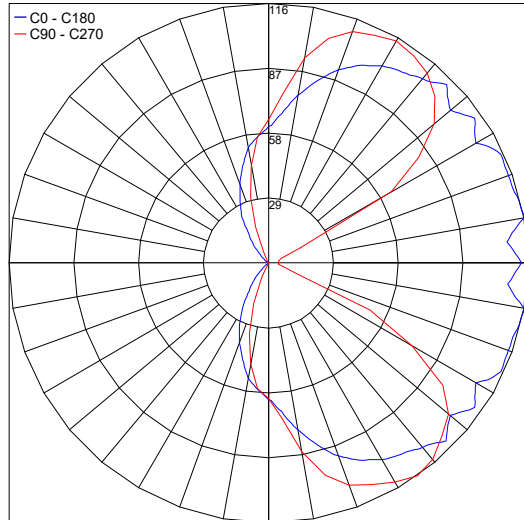

PHOTOMETRIC FILENAME : MIMICRY ROUND 3000K.IES

Maximum Candela = 120.4

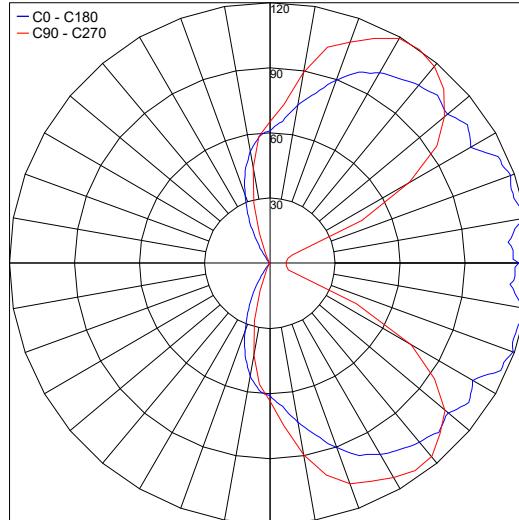

PHOTOMETRIC FILENAME : MIMICRY SQUARE 3000K.IES

Job Name/Date:

Fixture Type Designation: