

MINI HELAX

400 and Halosphere


Mini Helax is a minimalist, round, recessed LED downlight with a deep-set, glare-free light source suitable for indoor installation on ceilings. It comes in 2 static white temperatures as well as a dim to warm Halosphere version. It is available in 3 optics options and a textured white or black finish.



TECHNICAL DATA

Wattage / Input	3.8W (350mA) 4.3W (250mA - Halosphere version)
Power Supply	Remote, not included. See page 2.
CCT	2700K, 3000K (4000K on request) 1800-3000K (Dim to Warm)
CRI	>90
Delivered Lumens	342 lm (3000K) 389 lm (Dim to Warm - Halosphere)
Efficacy	90 lm/W (3000K) 90.5 lm/W (Dim to Warm - Halosphere)
Optics	36°, 40° (Halosphere version)
Finishes	Textured White, Textured Black
LED Source	LUXEON M or HALOSPHERE LED
Fixture Dimensions	Ø1.93" x 1.77"
Cutout Dimensions	Ø1.57"
Installation Depth	2.36"
Fixture Weight	0.44 lbs
IP Rating	IP20 (IP54 also available - see below)

Fixture Dimensions

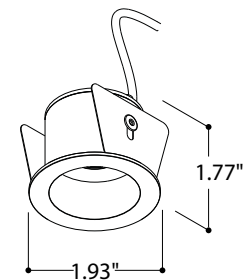

ORDERING INFORMATION

Example: T178937. Power Supplies ordered separately.

Model No.	Description
T178930	Mini Helax 400 - 2700K, Textured White, IP20
T178936	Mini Helax 400 - 2700K, Textured Black, IP20
T178931	Mini Helax 400 - 3000K, Textured White, IP20
T178937	Mini Helax 400 - 3000K, Textured Black, IP20
T178927	Mini Helax Halosphere - 1800-3000K, Textured White, IP20
T178928	Mini Helax Halosphere - 1800-3000K, Textured Black, IP20

Job Name/Date:


Fixture Type Designation:

MINI HELAX

400 and Halosphere

SUGGESTED POWER SUPPLIES
 Consult Factory for Power Supply Options

ACCESSORIES - Installation

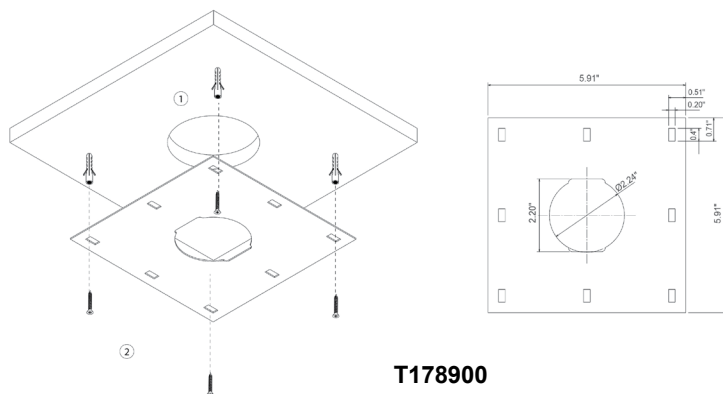


T178900
 Installation Frame for Plaster - cutout 1.57"

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 696

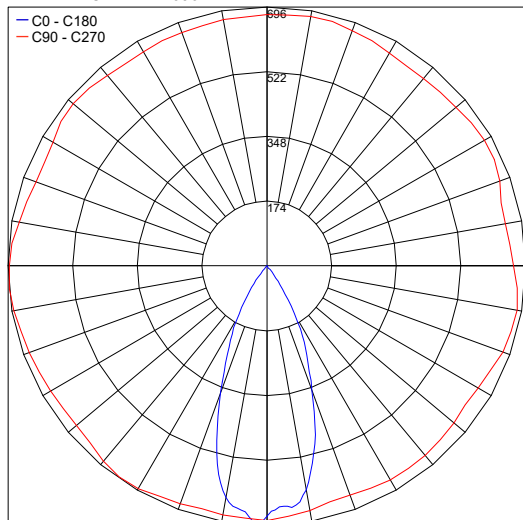

PHOTOMETRIC FILENAME : MINI HELAX 400.IES

Maximum Candela = 791.7

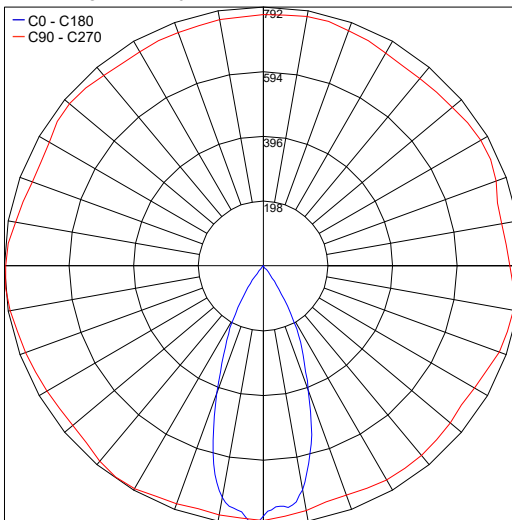

PHOTOMETRIC FILENAME : MINI HELAX HALOSPHERE.IES

Job Name/Date:

Fixture Type Designation: