

# MINI HELAX OUT

## 400


Mini Helax 400 Out is a minimalist, round, recessed LED downlight with a deep-set, glare-free light source suitable for outdoor installation on ceilings. It comes in 2 static white temperatures and in a textured white or black finish.



### TECHNICAL DATA

<b>Wattage / Input</b>	3.8W (350mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>CCT</b>	2700K, 3000K (4000K on request)
<b>CRI</b>	>90
<b>BUG Rating</b>	B1-U0-G0
<b>Delivered Lumens</b>	342 lm (3000K)
<b>Efficacy</b>	90 lm/W (3000K)
<b>Optics</b>	36°
<b>Finishes</b>	Textured White, Textured Black
<b>LED Source</b>	LUXEON M
<b>Fixture Dimensions</b>	Ø1.93" x 1.57"
<b>Cutout Dimensions</b>	Ø1.57"
<b>Installation Depth</b>	2.36"
<b>Fixture Weight</b>	0.44 lbs
<b>IP Rating</b>	IP54

Fixture Dimensions

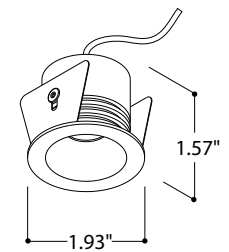

Installation depth 2.36"

### ORDERING INFORMATION

*Example: T178941. Power Supplies ordered separately.*

--

Model No.	Description
T178946	Mini Helax 400 - 2700K, Textured Black, IP54
T178940	Mini Helax 400 - 2700K, Textured White, IP54
T178947	Mini Helax 400 - 3000K, Textured Black, IP54
T178941	Mini Helax 400 - 3000K, Textured White, IP54

Job Name/Date:

Fixture Type Designation:

# MINI HELAX OUT

## 400

### SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2	1-1
<a href="#">PPLT00211</a>	Non-Dim	120VAC to 350mA, 10W, Class 2	2-2
<a href="#">PPLT00496</a>	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2	1-2
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2, DAMP	1-3
<a href="#">PPLT00263</a>	Leading/ trailing-edge dimmable to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	3-3
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W, Class 2	1-4 (1-16)

### Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 13W, Class 2	2-2

For other power supply options consult factory.

### PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 696

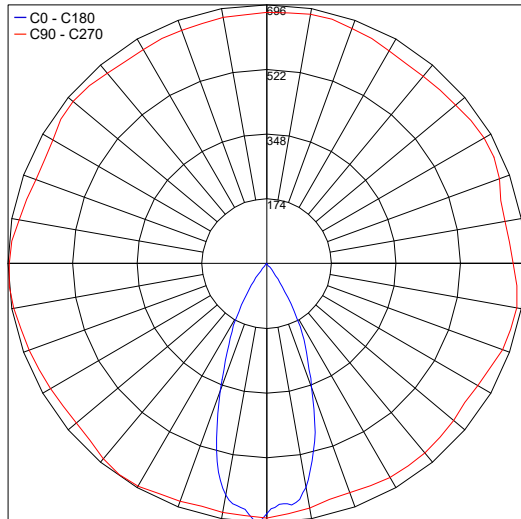

PHOTOMETRIC FILENAME : MINI HELAX OUT 400.IES

Job Name/Date:

Fixture Type Designation: