


MINI HELAX OUT

400


Mini Helax 400 Out is a minimalist, round, recessed LED downlight with a deep-set, glare-free light source suitable for outdoor installation on ceilings. It comes in 2 static white temperatures and in a textured white or black finish.

TECHNICAL DATA

Wattage / Input	3.8W (350mA)
Power Supply	Remote, not included. See page 2.
CCT	2700K, 3000K (4000K on request)
CRI	>90
BUG Rating	B1-U0-G0
Delivered Lumens	342 lm (3000K)
Efficacy	90 lm/W (3000K)
Optics	36°
Finishes	Textured White, Textured Black
LED Source	LUXEON M
Fixture Dimensions	Ø1.93" x 1.57"
Cutout Dimensions	Ø1.57"
Installation Depth	2.36"
Fixture Weight	0.44 lbs
IP Rating	IP54

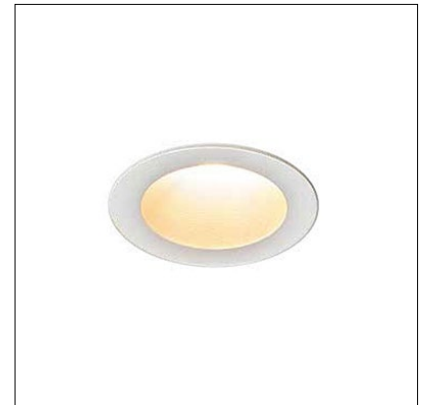

Fixture Dimensions

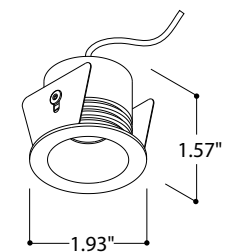

Installation depth 2.36"

ORDERING INFORMATION

Example: T178941. Power Supplies ordered separately.

--

Model No.	Description
T178946	Mini Helax 400 - 2700K, Textured Black, IP54
T178940	Mini Helax 400 - 2700K, Textured White, IP54
T178947	Mini Helax 400 - 3000K, Textured Black, IP54
T178941	Mini Helax 400 - 3000K, Textured White, IP54

Job Name/Date:

Fixture Type Designation:

MINI HELAX OUT

400

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2	1-1
PPLT00211	Non-Dim	120VAC to 350mA, 10W, Class 2	2-2
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2	1-2
PPLT00263	Leading/ trailing-edge dimmable to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	3-3
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-4

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 13W, Class 2	2-2

For other power supply options consult factory.

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 696

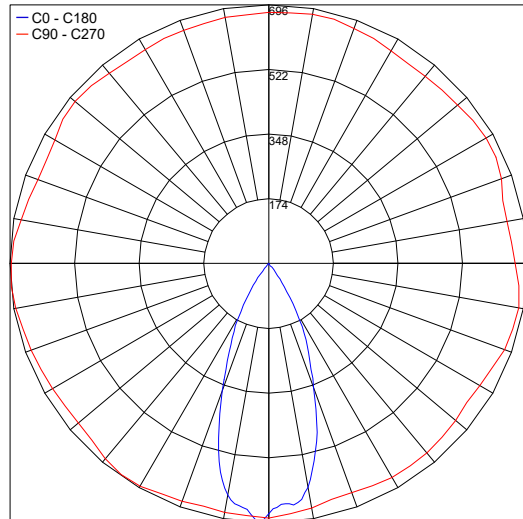

PHOTOMETRIC FILENAME : MINI HELAX OUT 400.IES

Job Name/Date:

Fixture Type Designation: