


Mini is a recessed wall luminaire made of Calcyt® plaster that can be used as an uplight or downlight orientation lighting. It is the baby brother of the Normal series and they are available as indoor (IP20), bathroom or outdoor (IP54) versions in 5 color temperatures.



## TECHNICAL DATA

<b>Wattage / Input</b>	1W, 2W, 4W (350mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: CALCYT® plaster
<b>CCT</b>	2200K, 2700K, 3000K, 4000K, Royal Blue
<b>CRI</b>	>90 and >80
<b>Delivered Lumens</b>	48 lm (1W, 3000K)
<b>Efficacy</b>	48 lm/W
<b>Optics</b>	Fixed
<b>Finishes</b>	Paintable Plaster
<b>Fixture Dimensions</b>	3.70" l x 3.15" w x 8.66" h
<b>Cut-out Dimension</b>	4.02" x 9.37"
<b>Aperature</b>	2.76" x 4.72"
<b>Color Consistency</b>	3-Step MacAdam
<b>IP Rating</b>	IP20
<b>JA8</b>	Exempt

Ceiling Cut-Out: 4.02" x 9.37"  
Fixture Dimensions

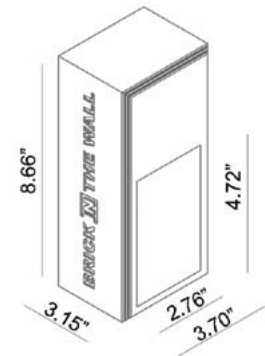

## ORDERING INFORMATION

*Example: 149 60 200. Accessories / Power Supplies ordered separately.*

Model No.	Description
<b>149 60 500</b> - 2200K	1W, 100 lm, CRI 80, IP20 Indoor
<b>149 60 000</b> - 2700K	1W, 100 lm, CRI 90, IP20 Indoor
<b>149 60 100</b> - 3000K	1W, 100 lm, CRI 90, IP20 Indoor
<b>149 60 200</b> - 4000K	1W, 100 lm, CRI 90, IP20 Indoor
<b>149 60 300</b> - Royal Blue	1W, 100 lm, IP20 Indoor
<b>149 62 500</b> - 2200K	2W, 200 lm, CRI 80, IP20 Indoor
<b>149 62 000</b> - 2700K	2W, 200 lm, CRI 90, IP20 Indoor
<b>149 62 100</b> - 3000K	2W, 200 lm, CRI 90, IP20 Indoor
<b>149 62 200</b> - 4000K	2W, 200 lm, CRI 90, IP20 Indoor
<b>149 62 300</b> - Royal Blue	2W, 200 lm, IP20 Indoor

Job Name/Date:

Model No.	Description
<b>149 61 500</b> - 2200K	4W, 400 lm, CRI 80, IP20 Indoor
<b>149 61 000</b> - 2700K	4W, 400 lm, CRI 90, IP20 Indoor
<b>149 61 100</b> - 3000K	4W, 400 lm, CRI 90, IP20 Indoor
<b>149 61 200</b> - 4000K	4W, 400 lm, CRI 90, IP20 Indoor
<b>149 61 300</b> - Royal Blue	4W, 400 lm, IP20 Indoor

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures		
			1W	2W	4W
<a href="#">PPLT00138</a>	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	2-3	1-1	N/A
<a href="#">PPLT00468</a>	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	4-13	2-6	1-3
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2	1-19	1-9	1-4
<a href="#">PPLT00309-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-19	1-9	1-4
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-80	1-40	1-20

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures		
						1W	2W	4W
<a href="#">PPLT00247</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv.	120-277VAC to 350mA, 7W, Class 2	3-6	2-3	1-1
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv.	120-277VAC to 350mA, 13W, Class 2	6-13	3-6	2-3
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv.	120-277VAC to 350mA, 19W, Class 2	11-18	6-9	3-4

For other power supply options consult factory.

## REQUIRED ACCESSORIES

### Installation


**749 01 000**

Required Outer Casing

## PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 8.97

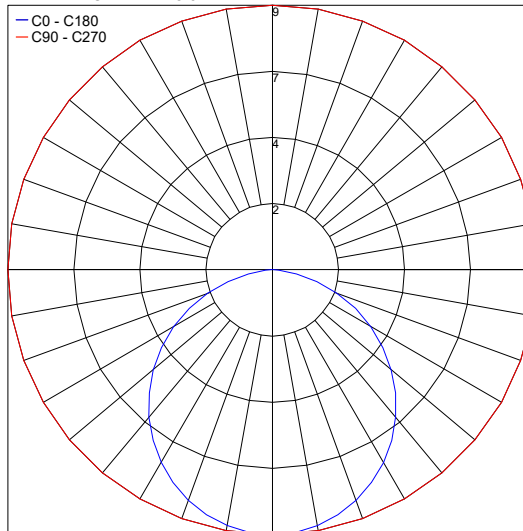

Job Name/Date:

Fixture Type Designation: