

MIRÒN 24


Miròn is an IP65-rated adjustable outdoor floodlight for installation on walls, solid surfaces, or poles. There are 2 sizes - Miròn 16, the smaller with 16 LEDs, and Miròn 24, the larger with 24 LEDs. Miròn is adjustable -20° to +90° and is available in 2 color temps, 4 finishes and 4 optical options. Fixture wires to remote junction box (provided by others).



TECHNICAL DATA

Wattage / Input	36W (120VAC)
Power Supply	Integral (0-10V Dimming)
Construction	Body: Die-Cast Aluminum Lens: Tempered, Transparent Glass
CCT	3000K, 4000K
CRI	>80
BUG Rating	B3-U1-G0 (65°)
Delivered Lumens	4805 lm (65°, 3000K) 4330 lm (street, 3000K)
Efficacy	119.5 lm/W (65°, 3000K) 107.7 lm/W (street, 3000K)
Optics	30°, 65°, Asymmetric, Street
LED Source	24 Power LEDs
Finishes	4 Standard, See Below
Fixture Dimensions	12.60" l x 7.48" w x 2.56" h
IP Rating	IP65

Fixture Dimensions

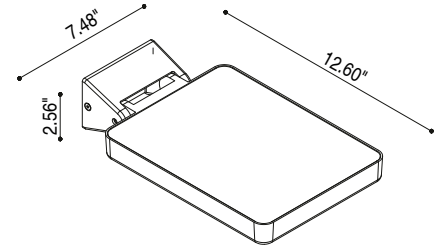

Fixture wires to remote junction box (provided by others)

ORDERING INFORMATION

Example: D900521054.US Accessories sold separately, see page 2

D9005			US
Model No.	Description (CCT, Optics)	Finish	
D9005	1105 - 3000K, 30°	2 - White	US
	2105 - 4000K, 30°	3 - Sand	
	1106 - 3000K, 65°	4 - Graphite	
	2106 - 4000K, 65°	5 - Aluminum	
	1107 - 3000K, Asymmetric		
	2107 - 4000K, Asymmetric		
	1108 - 3000K, Street		
	2108 - 4000K, Street		

Job Name/Date:

Fixture Type Designation:

ACCESSORIES



Bracket

Ø2.99" L 5.91"
D90214 - Graphite
D90215 - Aluminum



Double Bracket

Ø2.99" L 5.91"
D90234 - Graphite
D90235 - Aluminum



Bracket


Ø2.99" L 15.75"
D90224 - Graphite
D90225 - Aluminum



Double Bracket

Ø2.99" L 15.75"
D90244 - Graphite
D90245 - Aluminum

FINISHES



white



sand



graphite



aluminum




Pole Connector


Ø2.36"
D90255 - Aluminum

PHOTOMETRIC DATA


30°

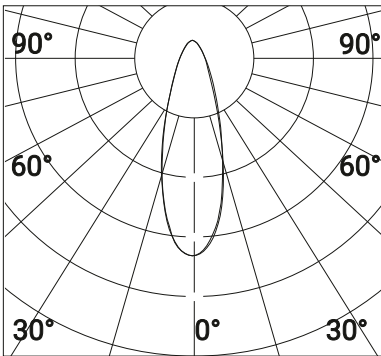


65°

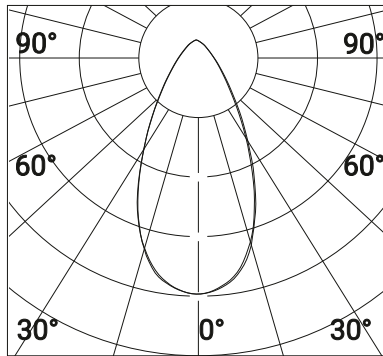

Asymmetric

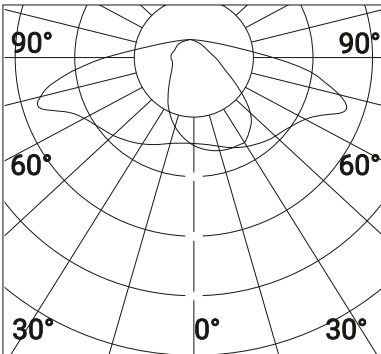

Street

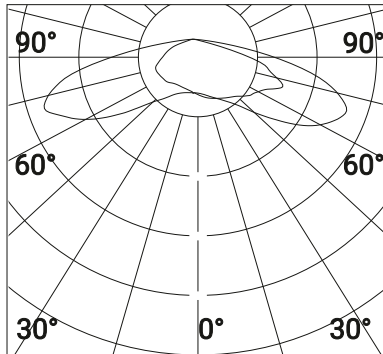

Job Name/Date:

Fixture Type Designation: