


Miròn is an IP65-rated adjustable outdoor floodlight for installation on walls, solid surfaces, or poles. There are 2 sizes - Miròn 16, the smaller with 16 LEDs, and Miròn 24, the larger with 24 LEDs. Miròn is adjustable -20° to +90° and is available in 2 color temps, 5 finishes and 4 optical options. Fixture wires to remote junction box (provided by others).



## TECHNICAL DATA

|                           |                                                              |
|---------------------------|--------------------------------------------------------------|
| <b>Wattage / Input</b>    | 36W (120VAC)                                                 |
| <b>Power Supply</b>       | Integral (0-10V Dimming)                                     |
| <b>Construction</b>       | Body: Die-Cast Aluminum<br>Lens: Tempered, Transparent Glass |
| <b>CCT</b>                | 2700K, 3000K                                                 |
| <b>CRI</b>                | >80                                                          |
| <b>BUG Rating</b>         | B3-U1-G0 (50°, 3000K)                                        |
| <b>Delivered Lumens</b>   | 4805 lm (50°, 3000K)<br>4330 lm (street, 3000K)              |
| <b>Efficacy</b>           | 119.5 lm/W (50°, 3000K)<br>107.7 lm/W (street, 3000K)        |
| <b>Optics</b>             | 30°, 50°, Asymmetric, Street                                 |
| <b>LED Source</b>         | 24 Power LEDs                                                |
| <b>Finishes</b>           | 5 Standard, See Below                                        |
| <b>Fixture Dimensions</b> | 12.60" l x 7.48" w x 2.56" h                                 |
| <b>IP Rating</b>          | IP65                                                         |
| <b>Impact Resistance</b>  | IK07                                                         |

Fixture Dimensions

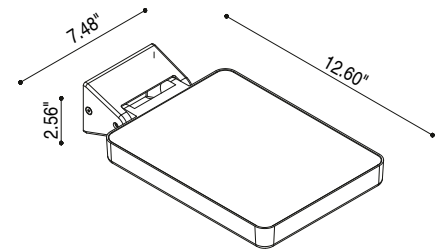

Fixture wires to remote junction box  
(provided by others)

## ORDERING INFORMATION

Example: D900521054.US Accessories sold separately, see page 2

| D9005     |                            |                                                    |                                                                     | US |
|-----------|----------------------------|----------------------------------------------------|---------------------------------------------------------------------|----|
| Model No. | CCT                        | Optics                                             | Finish                                                              |    |
| D9005     | 310 - 2700K<br>110 - 3000K | 5 - 30°<br>6 - 50°<br>7 - Asymmetric<br>8 - Street | 2 - White<br>3 - Sand<br>4 - Graphite<br>5 - Aluminum<br>8 - Corten | US |

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES



### Bracket

Ø2.99" L 5.91"

D90214 - Graphite

D90215 - Aluminum



### Double Bracket

Ø2.99" L 5.91"

D90234 - Graphite

D90235 - Aluminum



### Bracket

Ø2.99" L 15.75"

D90224 - Graphite

D90225 - Aluminum



### Double Bracket

Ø2.99" L 15.75"

D90244 - Graphite

D90245 - Aluminum

## FINISHES



white



sand



graphite



aluminum



corten




### Pole Connector

Ø2.36"


D90255 - Aluminum

## PHOTOMETRIC DATA


30°

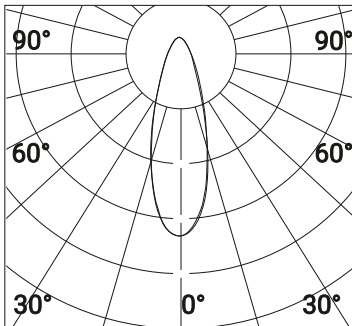


50°

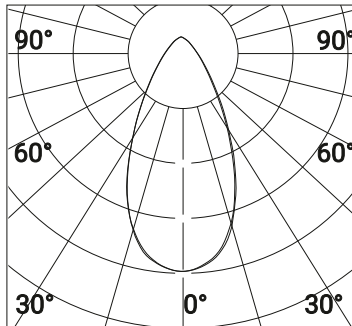

Asymmetric

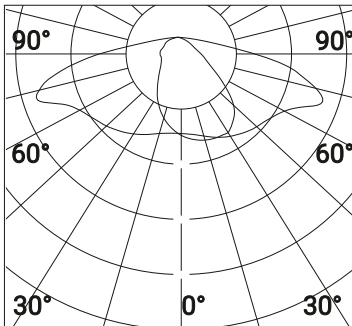

Street

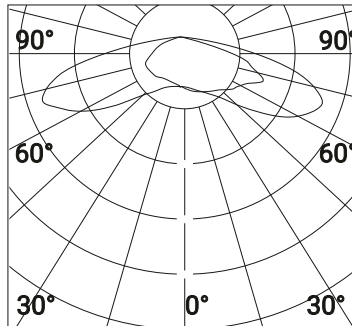

Job Name/Date:

Fixture Type Designation: