

MOBY P 1.1

The Moby P series are surface mounted spotlights suitable for underwater applications ONLY which blend green and blue LED colors to create chromotherapy or scenographic effects. It is available in white, RGBW or shades of Cyan with 3 different sizes and wattages and 4 different optics options.

TECHNICAL DATA


Wattage / Input	9W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Thermally Conductive Plastic Trim: Vitrified, Serigraphed Glass Bracket: AISI 316L Stainless Steel Lens: Tempered Extra-Clear Glass (0.47" thick)
CCT	2700K, 3000K, 4000K, RGBW, Shades of Cyan
CRI	CRI >80
BUG Rating	B1-U0-G0 (3000K)
Delivered Lumens	359 lm (3000K, 34°); RGBW: 208 lm (4000K, 34°) (R) 33 lm, (G) 61 lm, (B) 16 lm, (W) 98 lm Cyan: 184 lm (34°)
Efficacy	39.9 lm/W RGBW: 23.1 lm/W Cyan: 20.4 lm/W
Optics	4 Standard (see below)
Finishes	Glass
Fixture Dimensions	Ø4.13" x 4.45" l x 4.65" h
Fixture Weight	3.86 lbs
LED Source	1 Power LED Group RGBW: 1 Power LED RGBW Group Cyan: 1 Power LED Cyan Group
Lumen Maintenance	L90, B10 >50,000hrs (Ta 25°C)
Color Consistency	2-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP68
IK Rating	IK10



NTC



Fixture Dimensions

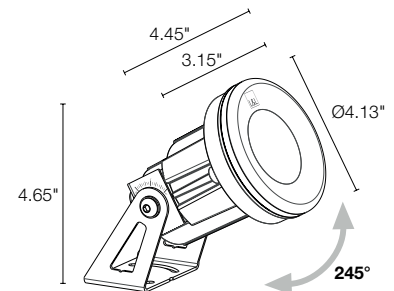

FOR UNDERWATER USE ONLY
Max Submersion Depth 32.8'

ORDERING INFORMATION

Example: MP1100FSV. Accessories / Power Supplies ordered separately.

MP1100			V
Model No.	CCT	Optics	Finish
MP1100	F - 2700K 5 - 3000K 9 - 4000K 7 - RGBW Y - Shades of Cyan	S - 22° M - 34° L - 62° W - 31°x64°	V - Glass

Job Name/Date:

Fixture Type Designation:


SUGGESTED POWER SUPPLIES

STATIC WHITE - 24VDC (FOR USE WITH FOUNTAIN / WATER FEATURES)

Part Number	Description	Input/Output	# of Fixtures
FPV-100000024	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, IP66, NEMA 4X	1-8
FPV-100100024	0-10V Dimming to 1.0%	120-277VAC to 24VDC, 100W, Class 2, IP66, NEMA 4X	1-8
FPV-100EL0024	DMX / RDM (Field Addressable) / DALI	120-277VAC to 24VDC, 100W, Class 2, IP66, NEMA 4X	1-8

RGBW / CYAN - 24VDC (FOR USE WITH FOUNTAIN / WATER FEATURES)

Part Number	Description	Input/Output	# of Fixtures
FPV-100EL0024	DMX / RDM (Field Addressable) / DALI	120-277VAC to 24VDC, 100W, IP66, NEMA 4X	1 - 8

*For other power supply options consult factory.***ACCESSORIES****Anti-Glare****WH0401**

Honeycomb Louvre

**Order together with lighting fixture*


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all photometry in 3000K, CRI 80


S - 22°

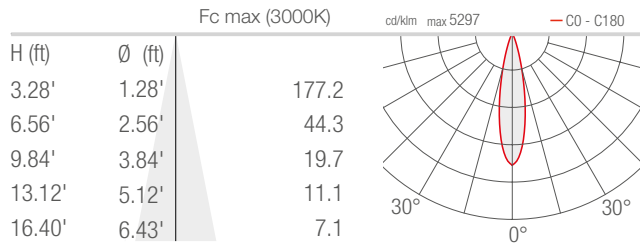


M - 34°

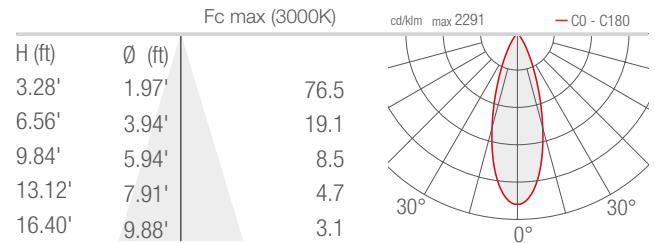

L - 62°

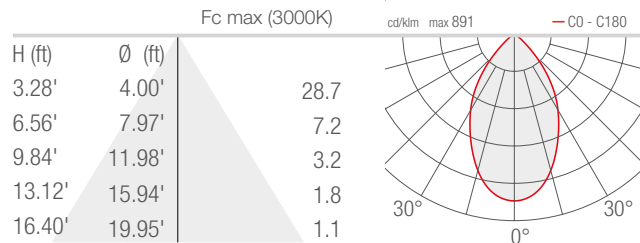

W - 31°x64°

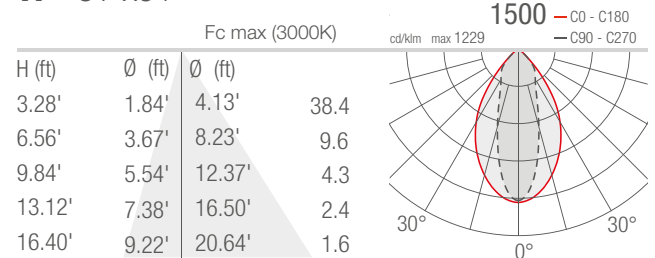

Job Name/Date:

Fixture Type Designation: