



MONOLIGHT BILIGHT

Indoor Recessed

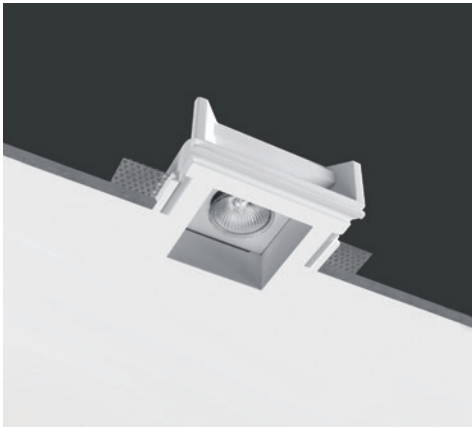


Monolight

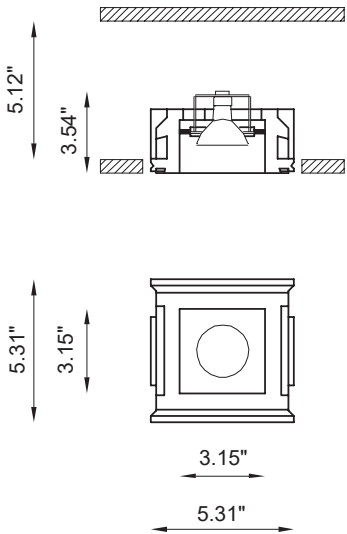

OTHER AVAILABLE CODES

BU6328.Z.27.AC	<i>lens</i>	40°
	<i>light color</i>	2700K
BU6328.Z.40.AC	<i>lens</i>	40°
	<i>light color</i>	4000K (on request)

TECHNICAL FEATURES

Code	BU6328.Z.AC
Type	Downlight 90°
	
Material	AC: AirCoral®
Absorption capacity*	30.35 ft²
Weight	1.98 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	5.71 × 5.71 in
Lamp type	LED 500 mA
	⚡ Vf: 18 VDC
Lamp wattage	1 × 9W
Luminous efficacy	1 × 1125 lm - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light color	White 3000K
Light hole	3.15 × 3.15 in
Voltage connection	By driver (optional)
CRI	>90
Note	On request available emergency.
	Other available light colors: 2700K, 4000K (on request).

OPTIONAL

Brick box	cod. BR6328LT	cod. BR6323LT
-----------	---------------	---------------

designplan® 


79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com


Tel: (908) 996-7710
Fax: (908) 996-7042

SINGLE AND DOUBLE LIGHT WITH VISIBLE LED

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²

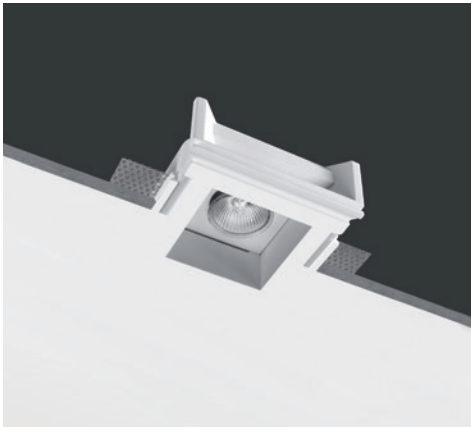

Monolight Dim To Warm

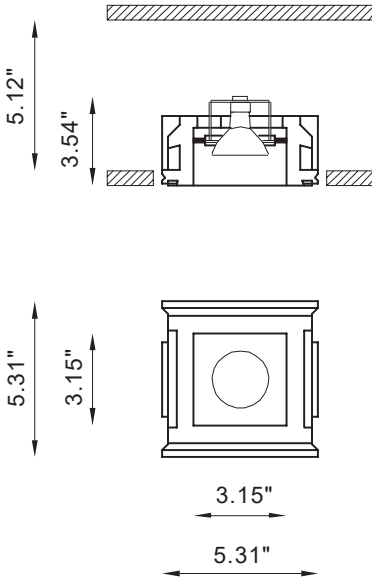


TECHNICAL FEATURES

Code	BU6325.AC 4 R 40 E 98 WD
Type	Downlight 90°
Material	AC: AirCoral®
Absorption capacity*	30.35 ft²
Weight	1.98 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote ON/OFF driver** (not included)
Cut out for plasterboard	5.71 × 5.71 in
Lamp type	LED 350mA ⚡ Vf: 17 VDC
Lamp wattage	1 × 6W
Luminous efficacy	1 × 600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°
Fitting	-
Light color	Dimming range 1800/3000K
Light hole	3.15 × 3.15 in
Voltage connection	By driver (optional)
CRI	>90
Note	**Monolight Dim To Warm requires dimming: amplitude (AM) dim to warm wide range input voltage.

OPTIONAL


Brick box	cod. BR6325LT
-----------	---------------

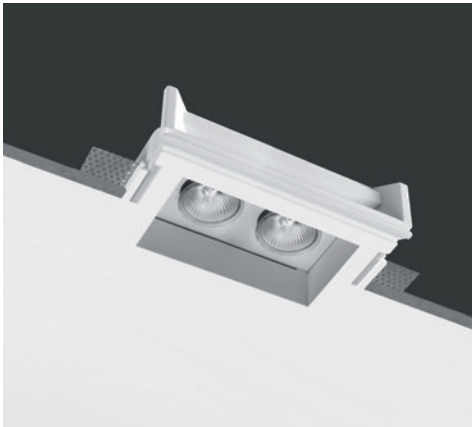

Bilight



Indoor Recessed

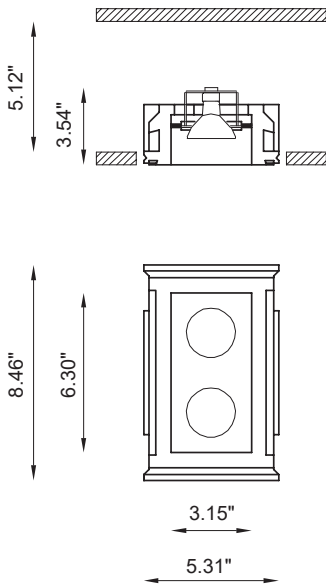

OTHER AVAILABLE CODES

BU6318.Z.27.AC	lens	40°
	light color	2700K
BU6318.Z.40.AC	lens	40°
	light color	4000K (on request)


TECHNICAL FEATURES

Code	BU6318.Z.AC
Type	Downlight 90°
Material	AC: AirCoral®
Absorption capacity*	50.38 ft²
Weight	2.87 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	8.86 × 5.71 in
Lamp type	LED 500mA ⚡ Vf: 2 × 18 VDC
Lamp wattage	2 × 9W
Luminous efficacy	2 × 1125 lm - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light color	White 3000K
Light hole	6.30 × 3.15 in
Voltage connection	By driver (optional)
CRI	>90
Note	On request available emergency.
	Other available light colors: 2700K, 4000K (on request).


OPTIONAL

Brick box	cod. BR6318LT	cod. BR6313LT
-----------	---------------	---------------

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²

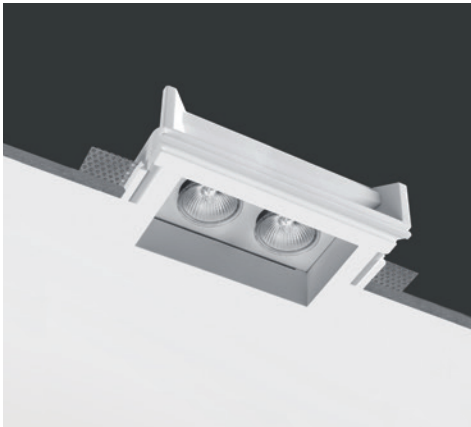

Bilight Dim To Warm

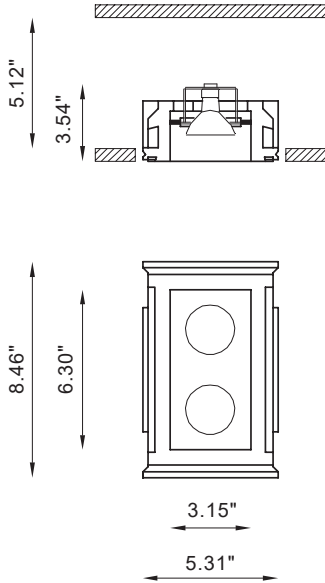

TECHNICAL FEATURES

Code	BU6315.AC 4 R 40 E 98 WD
Type	Downlight 90°
	 AC: AirCoral®
Material	
Absorption capacity*	30.35 ft²
Weight	1.98 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote ON/OFF driver** (not included)
Cut out for plasterboard	8.86 × 5.71 in
Lamp type	LED 350mA Vf: 17 VDC
Lamp wattage	2 × 6W
Luminous efficacy	2 × 600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°
Fitting	-
Light color	Dimming range 1800/3000K
Light hole	6.30 × 3.15 in
Voltage connection	By driver (optional)
CRI	>90
Note	**Bilight Dim To Warm requires dimming: amplitude (AM) dim to warm wide range input voltage.

OPTIONAL

Brick box	cod. BR6318LT
-----------	---------------



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²