

MOOR 1 IP20

INDOOR

Fix (not adjustable) 0° - 0°

8.9" × 15.8"


Material : CALCYT® plaster

MOOR 1 LED WARMDIM 900LM 350mA			
WARMDIM : DIMS FROM 3000°K TO 2000°K			
REF N° 101 29 630 DIM 0-10V			
11.8W - incl. line voltage driver - parallel wiring ▽ (0.2m) E - P - 4 Step MacAdam - CRI 90			

MOOR 1 LED 800LM Remote			
REF N°	2200°K	2700°K	3000°K
DIM 0-10V	101 29 500	101 29 000	101 29 100
6.4W - incl. line voltage driver - parallel wiring ▽ (0.2m) E - P - 2 Step MacAdam - CRI 90 - R9=75			

MOOR 1 LED 1000LM 350mA			
REF N°	2700°K	3000°K	4000°K
DIM 0-10V	101 29 020	101 29 120	101 29 220
9.1W - incl. line voltage driver - parallel wiring ▽ (0.2m) E - P - 2 Step MacAdam - CRI 90 - R9=75 -			

MOOR 1 LED 2000LM 230VAC			
REF N°	2700°K	3000°K	4000°K
DIM 0-10V	101 29 040	101 29 140	101 29 240
13.8W - incl. line voltage driver ◊ - parallel wiring ▽ (0.2m) E - P - 2 Step MacAdam - CRI 80 -			

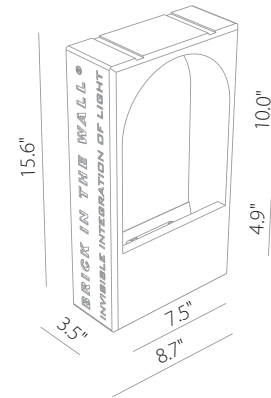

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT MOOR 1/2/3
REF N° 701 01 000 For mounting into gypsum walls

designplan®

BRICK IN THE WALL®
invisible integration of light

