


# MOOR 1 IP20

Moor is a collection of recessed wall luminaires made of Calcyt® plaster whose designs are inspired by Moorish architecture. It offers a variety of designs in two different sizes that can be integrated into a large range of projects. State of the art LEDs allow energy efficiency and design to be integrated.



Ceiling Cut-Out: 8.86" x 15.75"  
Fixture Dimensions

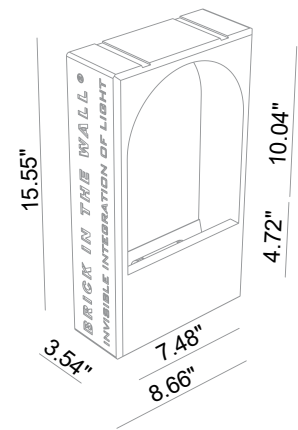

## TECHNICAL DATA

<b>Wattage / Input</b>	11.8W (WarmDim), 6.4W, 9.1W, 13.8W
<b>Power Supply</b>	Remote, not included. See below.
<b>Construction</b>	Body: CALCYT® Plaster
<b>CCT</b>	2200K, 2700K, 3000K, 4000K, WarmDim: Dims from 3000K to 2000K
<b>CRI</b>	>90, >80
<b>Optics</b>	Fixed
<b>Finishes</b>	Paintable Plaster
<b>Fixture Dimensions</b>	8.66" l x 3.54" w x 15.55" h
<b>Cut-out Dimension</b>	8.86" x 15.75"
<b>Aperature</b>	7.48" x 10.04"
<b>Color Consistency</b>	2-Step MacAdam, 4-Step MacAdam (WarmDim)
<b>IP Rating</b>	IP20

## ORDERING INFORMATION

*Example: 101 21 100. Accessories / Power Supplies ordered separately.*

--	--

Model No.	Description
101 21 630 - WarmDim	11.8W, 900 lm, CRI 90, Remote 350mA
101 21 500 - 2200K	10W, 800 lm, CRI 90, Remote 500mA
101 21 000 - 2700K	6.4W, 800 lm, CRI 90, Remote 250mA
101 21 100 - 3000K	6.4W, 800 lm, CRI 90, Remote 250mA
101 21 020 - 2700K	9.1W, 1000 lm, CRI 90, Remote 350mA
101 21 120 - 3000K	9.1W, 1000 lm, CRI 90, Remote 350mA
101 21 220 - 4000K	9.1W, 1000 lm, CRI 90, Remote 350mA
101 21 040 - 2700K	13.8W, 2000 lm, CRI 80, Remote 500mA
101 21 140 - 3000K	13.8W, 2000 lm, CRI 80, Remote 500mA
101 21 240 - 4000K	13.8W, 2000 lm, CRI 80, Remote 500mA

## REQUIRED ACCESSORIES

Installation

**701 01 000**

PlasterKit - Outer Casing

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

6.4W - 250mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1.0%	120-277VAC to 250mA, 10W, Class 2, DAMP	1-1
<a href="#">PPLT00290</a>	Leading/Trailing Edge Dimming to 10%	120VAC to 250mA, 16W, Class 2, DAMP	1-1
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 250mA, 20W, Class 2, DAMP	1-2
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 250mA, 30W, Class 2, DAMP	1-2
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 250mA, 50W, Class 2, DAMP	1-2
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 250mA, 100W, Class 2	1-8

## SUGGESTED POWER SUPPLIES

9.1W - 350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2, DAMP	1-1
<a href="#">PPLT00468</a>	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1
<a href="#">PPLT00656-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-2
<a href="#">PPLT00263</a>	Leading/Trailing Edge Dimming to 10%	120VAC to 350mA, 32W, Class 2	1-1
<a href="#">PPLT00168-P</a>	0-10V Dimming to 1.0% (2 Channels)	120-277VAC to 350mA, 50W, Class 2	1-4
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1% (4 Channels)	120-277VAC to 350mA, 100W, Class 2	1-8

Suggested Lutron Compatible - 350mA

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	2-2

## SUGGESTED POWER SUPPLIES

13.8W - 500mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 20W, Class 2, DAMP	1-1
<a href="#">PPLT00527</a>	Phase Dim (120V only)	120VAC to 500mA, 25W, Class 2, IP66	1-1
<a href="#">PPLT00262</a>	Leading/Trailing Edge Dimming to 10%	120VAC to 500mA, 32W, Class 2	1-1
<a href="#">PPLT00168-P</a>	0-10V Dimming to 1.0% (2 Channels)	120-277VAC to 500mA, 50W, Class 2	1-2
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1% (4 Channels)	120-277VAC to 500mA, 100W, Class 2	1-4

Suggested Lutron Compatible - 500mA

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00195</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	1-1

More power supply options on page 3

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

WarmDim - 11.8W - 350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00468</a>	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1
<a href="#">PPLT00656-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-1
<a href="#">PPLT00214</a>	0-10V Dimming to 10%	120-277VAC to 350mA, 30W, Class 2, IP66	1-2
<a href="#">PPLT00263</a>	Leading/Trailing Edge Dimming to 10%	120VAC to 350mA, 32W, Class 2	1-1
<a href="#">PPLT00168-P</a>	0-10V Dimming to 1.0% (2 Channels)	120-277VAC to 350mA, 50W, Class 2	1-2
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1% (4 Channels)	120-277VAC to 350mA, 100W, Class 2	1-4

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	1-1

*For other power supply options consult factory.*

## REQUIRED ACCESSORIES - Installation

**701 01 000**

PlasterKit - Outer Casing

Job Name/Date:

Fixture Type Designation: