


Moor is a collection of recessed wall luminaires made of Calcyt® plaster whose designs are inspired by Moorish architecture. It offers a variety of designs in two different sizes that can be integrated into a large range of projects. State of the art LEDs allow energy efficiency and design to be integrated.



Ceiling Cut-Out: 8.86" x 17.52"
Fixture Dimensions

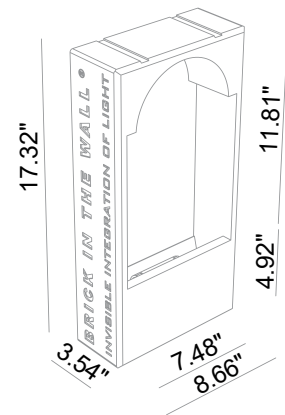

TECHNICAL DATA

Wattage / Input	11.8W (WarmDim), 6.4W, 9.1W, 13.8W
Power Supply	Remote, not included. See below.
Construction	Body: CALCYT® Plaster
CCT	2200K, 2700K, 3000K, 4000K, WarmDim: Dims from 3000K to 2000K
CRI	>90, >80
Optics	Fixed
Finishes	Paintable Plaster
Fixture Dimensions	8.66" l x 3.54" w x 17.32" h
Cut-out Dimension	8.86" x 17.52"
Aperature	7.48" x 11.81"
Color Consistency	2-Step MacAdam, 4-Step MacAdam (WarmDim)
IP Rating	IP20

ORDERING INFORMATION

Example: 101 24 100. Accessories / Power Supplies ordered separately.

--

Model No.	Description
101 24 630 - WarmDim	11.8W, 900 lm, CRI 90, Remote 350mA
101 24 500 - 2200K	10W, 800 lm, CRI 90, Remote 500mA
101 24 000 - 2700K	6.4W, 800 lm, CRI 90, Remote 250mA
101 24 100 - 3000K	6.4W, 800 lm, CRI 90, Remote 250mA
101 24 020 - 2700K	9.1W, 1000 lm, CRI 90, Remote 350mA
101 24 120 - 3000K	9.1W, 1000 lm, CRI 90, Remote 350mA
101 24 220 - 4000K	9.1W, 1000 lm, CRI 90, Remote 350mA
101 24 040 - 2700K	13.8W, 2000 lm, CRI 80, Remote 500mA
101 24 140 - 3000K	13.8W, 2000 lm, CRI 80, Remote 500mA
101 24 240 - 4000K	13.8W, 2000 lm, CRI 80, Remote 500mA

SUGGESTED POWER SUPPLIES

Consult Factory

REQUIRED ACCESSORIES

Installation

701 02 000

PlasterKit - Outer Casing

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

NEED INFORMATION ON DRIVERS

350mA

Part Number	Description	Input/Output	# of Fixtures		
			9.3W	11W	14.1W
PPLT00138	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	2-3	1-1	N/A
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	4-13	2-6	1-3
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2	1-19	1-9	1-4
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-19	1-9	1-4
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-80	1-40	1-20

Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures		
						9.3W	11W	14.1W
PPLT00247	L3DAE	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ LED Driv.	120-277VAC to 350mA, 7W, Class 2	3-6	2-3	1-1
PPLT00247	L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% 3-Wire LED Driv.	120-277VAC to 350mA, 7W, Class 2	3-6	2-3	1-1
PPLT00516	L3DAE	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ LED Driv.	120-277VAC to 350mA, 13W, Class 2	6-13	3-6	2-3
PPLT00516	L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% 3-Wire LED Driv.	120-277VAC to 350mA, 13W, Class 2	6-13	3-6	2-3
PPLT00179	L3DAE	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ LED Driv.	120-277VAC to 350mA, 19W, Class 2	11-18	6-9	3-4
PPLT00179	L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% 3-Wire LED Driv.	120-277VAC to 350mA, 19W, Class 2	11-18	6-9	3-4

WarmDim

Part Number	Description	Input/Output	# of Fixtures		
PPLT00138	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	2-3	1-1	N/A
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	4-13	2-6	1-3

For other power supply options consult factory.

ACCESSORIES - Installation

701 02 000

PlasterKit - Outer Casing

Job Name/Date:

Fixture Type Designation: