


# MOOR 5 LARGE

Moor Large are the larger versions of the Moor collection of recessed wall luminaires made of Calcyt® plaster whose designs are inspired by Moorish architecture. It offers a variety of designs in the larger size that can be integrated into a large range of projects. State of the art LEDs allow energy efficiency and design to be integrated.



Ceiling Cut-Out: 8.86" x 21.46"  
Fixture Dimensions

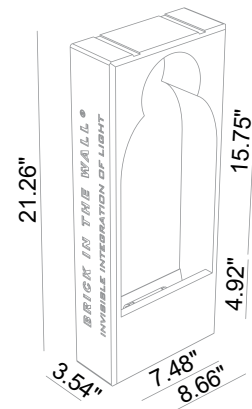

## TECHNICAL DATA

<b>Wattage / Input</b>	11.8W (WarmDim), 6.4W, 9.1W, 13.8W
<b>Power Supply</b>	Remote, not included. See below.
<b>Construction</b>	Body: CALCYT® Plaster
<b>CCT</b>	2200K, 2700K, 3000K, 4000K, WarmDim: Dims from 3000K to 2000K
<b>CRI</b>	>90, >80
<b>Optics</b>	Fixed
<b>Finishes</b>	Paintable Plaster
<b>Fixture Dimensions</b>	8.66" l x 3.54" w x 21.26" h
<b>Cut-out Dimension</b>	8.86" x 21.46"
<b>Aperature</b>	7.48" x 15.75"
<b>Color Consistency</b>	2-Step MacAdam, 4-Step MacAdam (WarmDim)
<b>IP Rating</b>	IP20

## ORDERING INFORMATION

Example: 102 25 120. Accessories / Power Supplies ordered separately.

--

Model No.	Description
102 25 630 - WarmDim	11.8W, 900 lm, CRI 90, Remote 350mA
102 25 500 - 2200K	10W, 800 lm, CRI 90, Remote 500mA
102 25 000 - 2700K	6.4W, 800 lm, CRI 90, Remote 250mA
102 25 100 - 3000K	6.4W, 800 lm, CRI 90, Remote 250mA
102 25 020 - 2700K	9.1W, 1000 lm, CRI 90, Remote 350mA
102 25 120 - 3000K	9.1W, 1000 lm, CRI 90, Remote 350mA
102 25 220 - 4000K	9.1W, 1000 lm, CRI 90, Remote 350mA
102 25 040 - 2700K	13.8W, 2000 lm, CRI 80, Remote 500mA
102 25 140 - 3000K	13.8W, 2000 lm, CRI 80, Remote 500mA
102 25 240 - 4000K	13.8W, 2000 lm, CRI 80, Remote 500mA

## SUGGESTED POWER SUPPLIES

Consult Factory

## REQUIRED ACCESSORIES

Installation

702 02 000  
PlasterKit - Outer Casing

Job Name/Date:

Fixture Type Designation:

**NEED INFORMATION ON DRIVERS FROM AARON**

**SUGGESTED POWER SUPPLIES**

350mA

Part Number	Description	Input/Output	# of Fixtures		
			9.3W	11W	14.1W
<a href="#">PPLT00138</a>	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	2-3	1-1	N/A
<a href="#">PPLT00468</a>	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	4-13	2-6	1-3
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2	1-19	1-9	1-4
<a href="#">PPLT00309-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-19	1-9	1-4
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-80	1-40	1-20

**Lutron Compatible**

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures		
						9.3W	11W	14.1W
<a href="#">PPLT00247</a>	L3DAE	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ LED Driv.	120-277VAC to 350mA, 7W, Class 2	3-6	2-3	1-1
<a href="#">PPLT00247</a>	L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% 3-Wire LED Driv.	120-277VAC to 350mA, 7W, Class 2	3-6	2-3	1-1
<a href="#">PPLT00516</a>	L3DAE	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ LED Driv.	120-277VAC to 350mA , 13W, Class 2	6-13	3-6	2-3
<a href="#">PPLT00516</a>	L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% 3-Wire LED Driv.	120-277VAC to 350mA , 13W, Class 2	6-13	3-6	2-3
<a href="#">PPLT00179</a>	L3DAE	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ LED Driv.	120-277VAC to 350mA , 19W, Class 2	11-18	6-9	3-4
<a href="#">PPLT00179</a>	L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% 3-Wire LED Driv.	120-277VAC to 350mA , 19W, Class 2	11-18	6-9	3-4

**WarmDim**

Part Number	Description	Input/Output	# of Fixtures		
<a href="#">PPLT00138</a>	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	2-3	1-1	N/A
<a href="#">PPLT00468</a>	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	4-13	2-6	1-3

For other power supply options consult factory.

**ACCESSORIES - Installation**

**702 02 000**

PlasterKit - Outer Casing

Job Name/Date:

Fixture Type Designation: