

Moor is a collection of recessed wall luminaires made of Calcyt® plaster whose designs are inspired by Moorish architecture. It offers a variety of designs in two different sizes that can be integrated into a large range of projects. State of the art LEDs allow energy efficiency and design to be integrated.

TECHNICAL DATA

Wattage / Input	11.8W (WarmDim), 6.4W, 9.1W, 13.8W
Power Supply	Remote, not included. See below.
Construction	Body: CALCYT® Plaster
CCT	2200K, 2700K, 3000K, 4000K, WarmDim: Dims from 3000K to 2000K
CRI	>90, >80
Optics	Fixed
Finishes	Paintable Plaster
Fixture Dimensions	8.66" l x 3.54" w x 18.90" h
Cut-out Dimension	8.86" x 18.90"
Aperature	7.48" x 13.19"
Color Consistency	2-Step MacAdam, 4-Step MacAdam (WarmDim)
IP Rating	IP20

ORDERING INFORMATION

Example: 101 28 100. Accessories / Power Supplies ordered separately.


Model No.	Description
101 28 630 - WarmDim	11.8W, 900 lm, CRI 90, Remote 350mA
101 28 500 - 2200K	10W, 800 lm, CRI 90, Remote 500mA
101 28 000 - 2700K	6.4W, 800 lm, CRI 90, Remote 250mA
101 28 100 - 3000K	6.4W, 800 lm, CRI 90, Remote 250mA
101 28 020 - 2700K	9.1W, 1000 lm, CRI 90, Remote 350mA
101 28 120 - 3000K	9.1W, 1000 lm, CRI 90, Remote 350mA
101 28 220 - 4000K	9.1W, 1000 lm, CRI 90, Remote 350mA
101 28 040 - 2700K	13.8W, 2000 lm, CRI 80, Remote 500mA
101 28 140 - 3000K	13.8W, 2000 lm, CRI 80, Remote 500mA
101 28 240 - 4000K	13.8W, 2000 lm, CRI 80, Remote 500mA

Job Name/Date:

Fixture Type Designation:



Ceiling Cut-Out: 8.86" x 18.90"
Fixture Dimensions

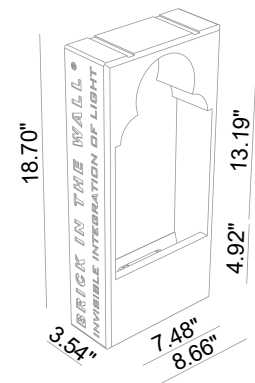

REQUIRED ACCESSORIES Installation

701 03 000

PlasterKit - Outer Casing

SUGGESTED POWER SUPPLIES

6.4W - 250mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 10W, Class 2, DAMP	1-1
PPLT00290	Leading/Trailing Edge Dimming to 10%	120VAC to 250mA, 16W, Class 2, DAMP	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 20W, Class 2, DAMP	1-2
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 50W, Class 2, DAMP	1-2

SUGGESTED POWER SUPPLIES

9.1W - 350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2, DAMP	1-1
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1
PPLT00656-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-2
PPLT00263	Leading/Trailing Edge Dimming to 10%	120VAC to 350mA, 32W, Class 2	1-1
PPLT00168-P	0-10V Dimming to 1.0% (2 Channels)	120-277VAC to 350mA, 50W, Class 2	1-4
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to (100-2000mA), 100W, Class 2	1-2

Suggested Lutron Compatible - 350mA

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	2-2

SUGGESTED POWER SUPPLIES

13.8W - 500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 20W, Class 2, DAMP	1-1
PPLT00527	Phase Dim (120V only)	120VAC to 500mA, 25W, Class 2, IP66	1-1
PPLT00262	Leading/Trailing Edge Dimming to 10%	120VAC to 500mA, 32W, Class 2	1-1
PPLT00168-P	0-10V Dimming to 1.0% (2 Channels)	120-277VAC to 500mA, 50W, Class 2	1-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to (100-2000mA), 100W, Class 2	1-2

Suggested Lutron Compatible - 500mA

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	1-1

More power supply options on page 3

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

WarmDim - 11.8W - 350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1
PPLT00656-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-1
PPLT00214	0-10V Dimming to 10%	120-277VAC to 350mA, 30W, Class 2, IP66	1-2
PPLT00263	Leading/Trailing Edge Dimming to 10%	120VAC to 350mA, 32W, Class 2	1-1
PPLT00168-P	0-10V Dimming to 1.0% (2 Channels)	120-277VAC to 350mA, 50W, Class 2	1-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to (100-2000mA), 100W, Class 2	1-1

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	1-1

*For other power supply options consult factory.***REQUIRED ACCESSORIES - Installation****701 03 000**

PlasterKit - Outer Casing

*Job Name/Date:**Fixture Type Designation:*