

# MOUSE+ IP54

## BATHROOM


Mouse+ is an organically-shaped recessed orientation light made of fully paintable Calcyt® plaster. It is different than the regular Mouse in its gentle, curved edges. It is available in an indoor (IP20), bathroom or outdoor (IP54) version in 5 color temperatures and 2 wattages. Mouse+ can be directly installed in solid walls as well as in gypsum with an optional plasterkit.

### TECHNICAL DATA

|                    |                                        |
|--------------------|----------------------------------------|
| Wattage / Input    | 1W, 2W (350mA)                         |
| Power Supply       | Remote, not included. See page 2.      |
| Construction       | Body: CALCYT® plaster                  |
| CCT                | 2200K, 2700K, 3000K, 4000K, Royal Blue |
| CRI                | >80, >90                               |
| Delivered Lumens   | 30 lm (1W, 3000K)                      |
| Efficacy           | 30 lm/W                                |
| Optics             | Fixed                                  |
| Finishes           | Paintable Plaster                      |
| Fixture Dimensions | 7.09" l x 1.57" w x 6.57" h            |
| Cut-out Dimension  | 7.28" x 6.77"                          |
| Aperture           | 4.96" x 3.15"                          |
| Color Consistency  | 3-Step MacAdam                         |
| IP Rating          | IP54                                   |



Ceiling Cut-Out: 7.28" x 6.77"  
Fixture Dimensions

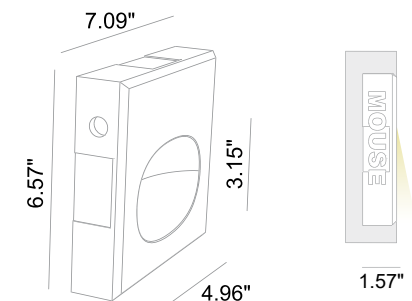

### ORDERING INFORMATION

Example: 147 60 201. Accessories / Power Supplies ordered separately.

| Model No.               | Description                       |
|-------------------------|-----------------------------------|
| 147 60 501 - 2200K      | 1W, 100 lm, CRI 80, IP54 Bathroom |
| 147 60 001 - 2700K      | 1W, 100 lm, CRI 90, IP54 Bathroom |
| 147 60 101 - 3000K      | 1W, 100 lm, CRI 90, IP54 Bathroom |
| 147 60 201 - 4000K      | 1W, 100 lm, CRI 90, IP54 Bathroom |
| 147 60 301 - Royal Blue | 1W, 100 lm, IP54 Bathroom         |
| 147 62 501 - 2200K      | 2W, 200 lm, CRI 80, IP54 Bathroom |
| 147 62 001 - 2700K      | 2W, 200 lm, CRI 90, IP54 Bathroom |
| 147 62 101 - 3000K      | 2W, 200 lm, CRI 90, IP54 Bathroom |
| 147 62 201 - 4000K      | 2W, 200 lm, CRI 90, IP54 Bathroom |
| 147 62 301 - Royal Blue | 2W, 200 lm, IP54 Bathroom         |

Job Name/Date:

Fixture Type Designation:

### SUGGESTED POWER SUPPLIES

350mA


| Part Number                 | Description           | Input/Output                       | # of Fixtures |      |
|-----------------------------|-----------------------|------------------------------------|---------------|------|
|                             |                       |                                    | 1W            | 2W   |
| <a href="#">PPLT00138</a>   | 0-10V Dimming to 10%  | 120-277VAC to 350mA, 4W, Class 2   | 2-3           | 1-1  |
| <a href="#">PPLT00468</a>   | Phase Dim (120V only) | 120VAC to 350mA, 14W, Class 2      | 4-13          | 2-6  |
| <a href="#">PPLT00308-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 350mA, 30W, Class 2  | 1-19          | 1-9  |
| <a href="#">PPLT00309-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 350mA, 50W, Class 2  | 1-19          | 1-9  |
| <a href="#">PPLT00538-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 350mA, 100W, Class 2 | 1-80          | 1-40 |

### Suggested Lutron Compatible

| Part Number               | Option         | Lutron SKU | Dim Range | Description                                    | Input/Output                      | # of Fixtures |     |
|---------------------------|----------------|------------|-----------|------------------------------------------------|-----------------------------------|---------------|-----|
|                           |                |            |           |                                                |                                   | 1W            | 2W  |
| <a href="#">PPLT00247</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 7W, Class 2  | 3-6           | 2-3 |
| <a href="#">PPLT00516</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 13W, Class 2 | 6-13          | 3-6 |
| <a href="#">PPLT00179</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 19W, Class 2 | 11-18         | 6-9 |

For other power supply options consult factory.

### ACCESSORIES - Installation



**747 01 000**

Outer Casing


Housing: perforated aluminum

### PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 24.9

— C0 - C180  
— C90 - C270

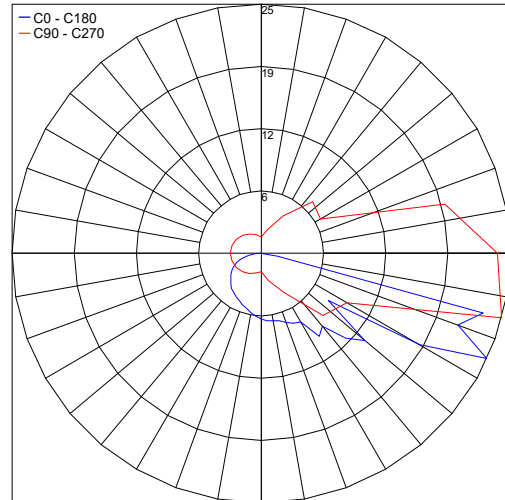

Job Name/Date:

Fixture Type Designation: