

MOUSE+ IP54

BATHROOM


Mouse+ is an organically-shaped recessed orientation light made of fully paintable Calcyt® plaster. It is different than the regular Mouse in its gentle, curved edges. It is available in an indoor (IP20), bathroom or outdoor (IP54) version in 5 color temperatures and 2 wattages. Mouse+ can be directly installed in solid walls as well as in gypsum with an optional plasterkit.

TECHNICAL DATA

Wattage / Input	1W, 2W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: CALCYT® plaster
CCT	2200K, 2700K, 3000K, 4000K, Royal Blue
CRI	>80, >90
Delivered Lumens	30 lm (1W, 3000K)
Efficacy	30 lm/W
Optics	Fixed
Finishes	Paintable Plaster
Fixture Dimensions	7.09" l x 1.57" w x 6.57" h
Cut-out Dimension	7.28" x 6.77"
Aperture	4.96" x 3.15"
Color Consistency	3-Step MacAdam
IP Rating	IP54
JA8	Exempt



Ceiling Cut-Out: 7.28" x 6.77"
Fixture Dimensions

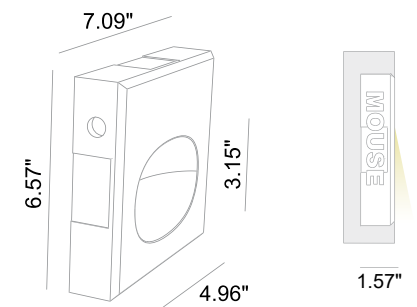

ORDERING INFORMATION

Example: 147 60 201. Accessories / Power Supplies ordered separately.

Model No.	Description
147 60 501 - 2200K	1W, 100 lm, CRI 80, IP54 Bathroom
147 60 001 - 2700K	1W, 100 lm, CRI 90, IP54 Bathroom
147 60 101 - 3000K	1W, 100 lm, CRI 90, IP54 Bathroom
147 60 201 - 4000K	1W, 100 lm, CRI 90, IP54 Bathroom
147 60 301 - Royal Blue	1W, 100 lm, IP54 Bathroom
147 62 501 - 2200K	2W, 200 lm, CRI 80, IP54 Bathroom
147 62 001 - 2700K	2W, 200 lm, CRI 90, IP54 Bathroom
147 62 101 - 3000K	2W, 200 lm, CRI 90, IP54 Bathroom
147 62 201 - 4000K	2W, 200 lm, CRI 90, IP54 Bathroom
147 62 301 - Royal Blue	2W, 200 lm, IP54 Bathroom

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA


Part Number	Description	Input/Output	# of Fixtures 1W	# of Fixtures 2W
PPLT00138	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	2-3	1-1
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	4-13	2-6
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-19	1-9
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to (100-2000mA), 100W, Class 2	2-20	1-10

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures 1W	# of Fixtures 2W
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	3-6	2-3
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	6-13	3-6
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	11-18	6-9

For other power supply options consult factory.

ACCESSORIES - Installation



747 01 000

Outer Casing


Housing: perforated aluminum

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 24.9

— C0 - C180
— C90 - C270

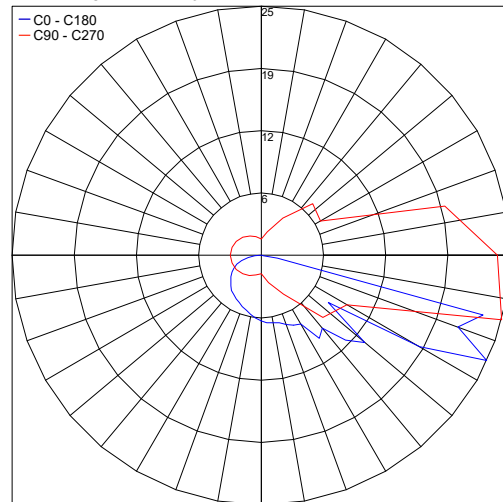

Job Name/Date:

Fixture Type Designation: