


Move In is a recessed wall luminaire for indoor installation that has a rounded, soft edge design which allows for flat integration into the wall, and is especially fit for integration in more traditional and classic interiors.



TECHNICAL DATA

Wattage / Input	6.4W (250mA, 350mA for 2200K)
Power Supply	Remote, not included. See page 2.
Construction	Body: CALCYT® Plaster
CCT	2200K, 2700K, 3000K (4000K, WarmDim on request)
CRI	>80 and >90
Delivered Lumens	1000 lm (3000K)
Efficacy	147.1 lm/W
Optics	Fixed
Finishes	Paintable Plaster
Fixture Dimensions	10.24" l x 2.56" w x 17.13" h
Cut-out Dimension	10.43" x 17.32"
Color Consistency	2-Step MacAdam 4-Step MacAdam (WarmDim)
IP Rating	IP20

Wall Cut-Out: 10.43" x 17.32"
Fixture Dimensions:

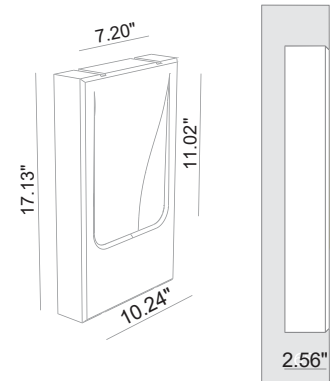

ORDERING INFORMATION

Example: 122 29 500. Accessories / Power Supplies ordered separately.

Model No.	Description
122 29 500 - 2200K (6.4W)	Remote 350mA
122 29 000 - 2700K (6.4W)	Remote 250mA
122 29 100 - 3000K (6.4W)	Remote 250mA

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA for 2200K version

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2, DAMP	1-1
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-2
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2
PPLT00561-P350	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-2

Suggested Lutron Compatible - 350mA for 2200K version

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	2-2

SUGGESTED POWER SUPPLIES


250mA for 2700K or 3000K versions

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 10W, Class 2, DAMP	1-1
PPLT00290	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 250mA, 16W, Class 2, DAMP	1-1
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 250mA, 50W, Class 2	1-2

For other power supply options consult factory.

REQUIRED ACCESSORIES

Installation

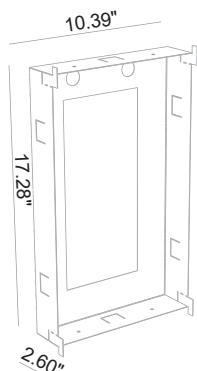

722 01 000
Outer Casing
Housing - perforated aluminum

Job Name/Date:

Fixture Type Designation: