

MOVE OUT IP20


Move Out is a recessed wall luminaire for indoor installation that has a rounded, new edge design which has a shadow line that moves out from the wall. It is the complement of Move In.



Wall Cut-Out: 11.61" x 17.52"
Fixture Dimensions

TECHNICAL DATA

Wattage / Input	6W, 6.5W, 6.8W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: CALCYT® Plaster
CCT	2200K, 2700K, 3000K, 4000K, WarmDim
CRI	>80 and >90
Delivered Lumens	1000 lm (3000K)
Efficacy	147.1 lm/W
Optics	Fixed
Finishes	Paintable Plaster
Fixture Dimensions	11.42" l x 2.68" w x 17.32" h
Cut-out Dimension	11.61" x 17.52"
Color Consistency	2-Step MacAdam, 4-Step MacAdam (WarmDim)
IP Rating	IP20

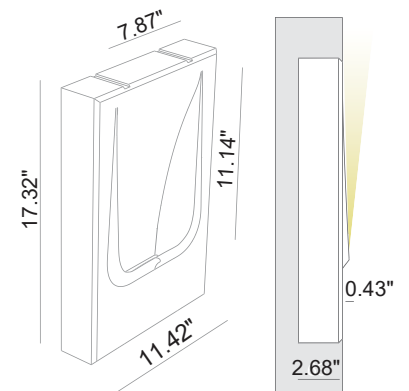

ORDERING INFORMATION

Example: 121 71 500. Accessories / Power Supplies ordered separately.


Model No.	Description
121 71 500 - 2200K (6.5W 600 lm)	Phase Dim
121 71 000 - 2700K (6.5W 600 lm)	Phase Dim
121 71 100 - 3000K (6.5W 600 lm)	Phase Dim
121 61 500 - 2200K (6.5W 600 lm)	0-10V Dim
121 61 000 - 2700K (6.5W 600 lm)	0-10V Dim
121 61 100 - 3000K (6.5W 600 lm)	0-10V Dim
121 73 000 - 2700K (6.8W 1000 lm)	Phase Dim
121 73 100 - 3000K (6.8W 1000 lm)	Phase Dim
121 73 200 - 4000K (6.8W 1000 lm)	Phase Dim
121 63 000 - 2700K (6.8W 1000 lm)	0-10V Dim
121 63 100 - 3000K (6.8W 1000 lm)	0-10V Dim
121 63 200 - 4000K (6.8W 1000 lm)	0-10V Dim
121 71 600 - WarmDim (6W 500 lm)	Phase Dim
121 61 600 - WarmDim (6W 500 lm)	0-10V Dim

SUGGESTED POWER SUPPLIES

Consult Factory

REQUIRED ACCESSORIES

Installation

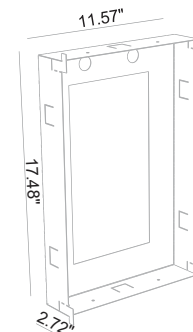

721 01 000
Outer Casing
Housing -
perforated aluminum

Job Name/Date:

Fixture Type Designation: