


# N2-65 and N2-E

N2-65 and N2-E are linear profiles for surface installation on walls and false ceilings. N2-65 is IP65-rated and comes in 4 standard pre-cut lengths, available in dim to warm, and 3 static white color temperatures. N2-E is IP40-rated and custom cuttable in the field, available in dim to warm, RGBW and 4 static white options. Both are anodized aluminum with diffused optics.

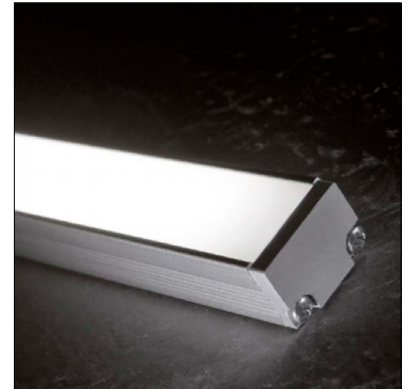

Fixture Dimensions - See page 2

## TECHNICAL DATA

<b>Wattage</b>	19.2W per 3.28 ft (1 m)
<b>Power Supply</b>	Remote, not included. Consult Factory.
<b>Construction</b>	Body: Anodized Aluminum Cable Length: 1.64' (connected at rear)
<b>CCT</b>	N2-65: 2700K, 3000K, 4000K, Dim Warm N2-E: 2200K, 2700K, 3000K, 4000K, Dim Warm, RGB+W (3000K)
<b>Delivered Lumens</b>	1520 lm per 3.28' (3000K) 1593 lm per 3.28' (DimWarm) 864 lm per 3.28' (RGBW)
<b>Efficacy</b>	79.2 lm/W per 3.28" (3000K) 83 lm/W per 3.28" (DimWarm) 45 lm/W per 3.28" (RGBW)
<b>Optics</b>	Diffuse
<b>Finishes</b>	Anodized Aluminum
<b>Fixture Dimensions</b>	19.7", 39.4", 59.1", 78.7" l x 0.7" w x 0.5" h (N2-65) 118.1" x 0.7" w x 0.5" h (N2-E) 196.9" x 0.3" (LED Circuit Reel)
<b>Color Consistency</b>	<3-Step MacAdam
<b>IP Rating</b>	IP65, IP40 (N2-E)
<b>Impact Resistance</b>	IK08, IK05 (N2-E)

## ORDERING INFORMATION

Example: LM04.104587.US.03.DI.BPP. Accessories / Power Supplies ordered separately.


	<b>03</b>			
<b>Model No.</b>	<b>Finish</b>	<b>Optic</b>	<b>CCT</b>	<b>Cable Exit</b>
LM04.104587.US (19.7" length)	03 - Anodized Aluminum	DI - Diffuse	BC - 2700K	P - Rear Exit
LM04.104588.US (39.4" length)			BP - 3000K	
LM04.104589.US (59.1" length)			BF - 4000K	
LM04.104590.US (78.7" length)			DW - DimWarm (2800K-6000K)	
LM30.103514.US (Circuit Reel) <i>Profile housing sold separately and can be found under installation accessories on page 2</i>		DP - Perpendicular Diffuse	RGBW - RGB+W (3000K) XC - 2200K <i>RGBW &amp; 2200K only available on N1-E</i>	<b>Circuit Power</b> 20 - 19.2W/3.28 ft

Job Name/Date:


Fixture Type Designation:

## FIXTURE DIMENSIONS - N2-65 *(Complete Fixtures with LEDs)*

Standard Lengths




19.7" x 0.7" x H 0.5"



39.4" x 0.7" x H 0.5"




59.1" x 0.7" x H 0.5"



78.7" x 0.7" x H 0.5"


## FIXTURE DIMENSIONS - N2-E

*(Empty Fixture, Field Cuttable - LED Strip Sold Separately)*



196.9" x 0.3"

Custom Cuttable



118.1" x 0.7" x H 0.5"

## ACCESSORIES - Installation



**LM30.104600.US**

(118.1" length)

Housing for Custom Cuttable

## ACCESSORIES - Installation



**LM20.104593**

Pair of Fixing Clips  
in Chromes Iron  
(1 every 19.7")



**LM20.104594**

Adjustment Bracket  
+/-85° in Stainless  
Steel  
(1 every 19.7")



**LM20.104596**

Aluminum Closing  
Cap

**SOLD INDIVIDUALLY**

Order 2 per fixture



**LM20.104597**

Aluminum Closing  
Cap with Hole for  
Cable Output  
(for use with N2-E only)

**SOLD INDIVIDUALLY**

Order 1 per fixture **ONLY**  
if cable output T is chosen

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


Consult Factory

For DIM WARM or RGBW power supplies, contact factory.

## PHOTOMETRIC DATA


Note: All photometric data is 3000K

Maximum Candela = 308.2

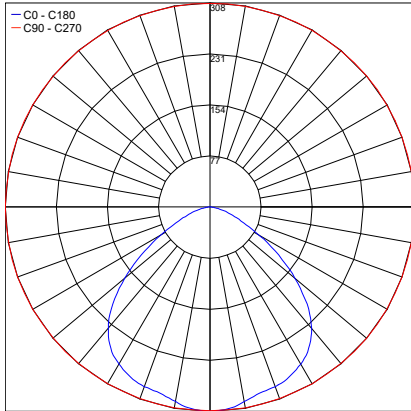


PHOTOMETRIC FILENAME : N2 LM04.104587.03.DI.BPP L19.7IN.IES

Maximum Candela = 609.9

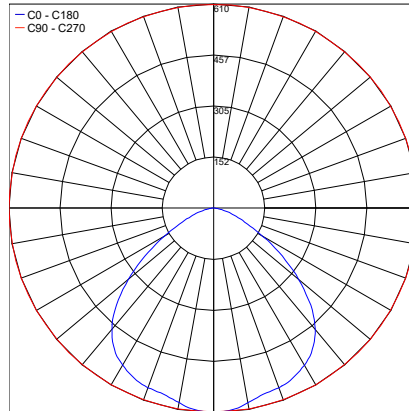


PHOTOMETRIC FILENAME : N2 LM04.104588.03.DI.BPP L39.4IN.IES

Maximum Candela = 1540.9

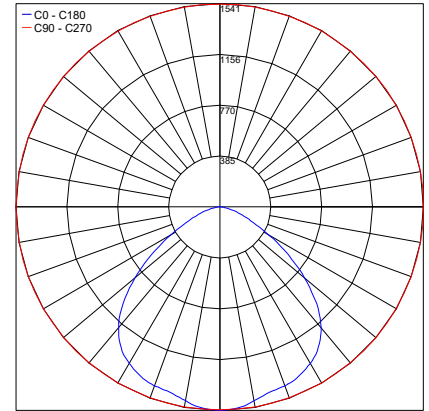


PHOTOMETRIC FILENAME : N2-E LM30.104600.03.DI.BPP L98.4IN.IES

Maximum Candela = 914.8

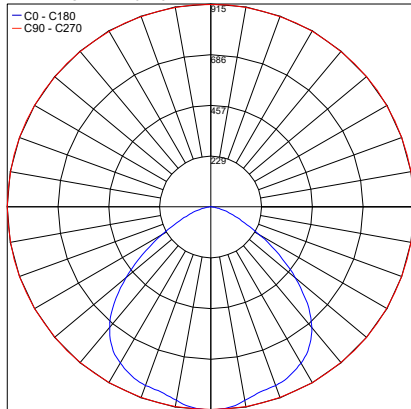


PHOTOMETRIC FILENAME : N2 LM04.104589.03.DI.BPP L59.1IN.IES

Maximum Candela = 1232.7

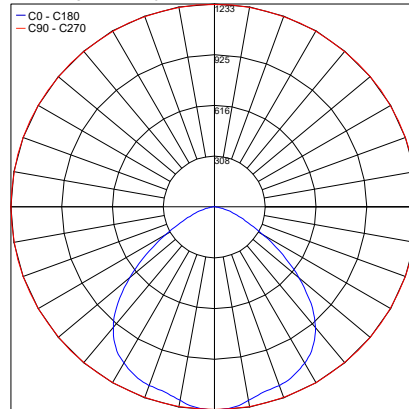

PHOTOMETRIC FILENAME : N2 LM04.104590.03.DI.BPP L78.7IN.IES

Maximum Candela = 401.2

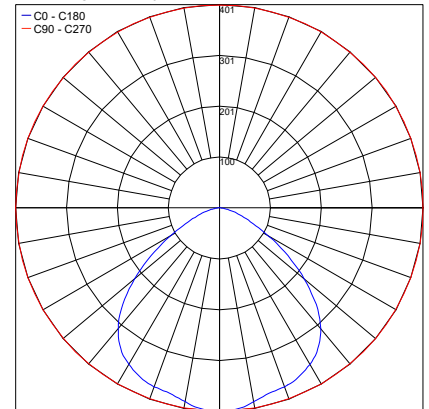

PHOTOMETRIC FILENAME : N2-E LM30.104600.03.DI.BPP L118.1IN.IES

Job Name/Date:

Fixture Type Designation: