

# NAIL PRO 1


Nail Pro is an IP67-rated, in-grade upright suitable for ground or wall installation, perfect for marking paths, transforming corridors and lighting stairs. Nail Pro comes in 3 color temperatures and 4 different directional beam options. Nail Pro 1 is the single direction beam version in a stainless steel finish.

## TECHNICAL DATA

<b>Wattage / Input</b>	4W
<b>Power Supply</b>	Remote, not included. Consult Factory.
<b>Construction</b>	Body: Anodized Anticorodal Aluminum AISI 316L Stainless Steel Cable Length: 1.64'
<b>CCT</b>	2700K, 3000K, 4000K
<b>BUG Rating</b>	B0-U3-G3 (3000K)
<b>Delivered Lumens</b>	475 lm (3000K)
<b>Efficacy</b>	118.7 lm/W (3000K)
<b>Optics</b>	Asymmetric
<b>Finishes</b>	Stainless Steel
<b>Fixture Dimensions</b>	Ø3.15" x 1.97" h
<b>Cut-Out Size</b>	Ø1.89"
<b>Color Consistency</b>	<3-Step MacAdam
<b>IP Rating</b>	IP67
<b>Impact Resistance</b>	IK10
<b>Driveover Capacity</b>	Up to 6614 lbs



Fixture Dimensions

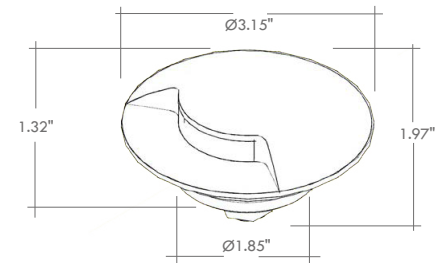

## ORDERING INFORMATION

Example: LM07.104038.US.05.AS.BP. Accessories / Power Supplies ordered separately.

LM07.104038.US	05	AS	
<b>Model No.</b>	<b>Finish</b>	<b>Optic</b>	<b>CCT</b>
LM07.104038.US	05 - Stainless	AS - Asymmetric	BC - 2700K BP - 3000K BF - 4000K


Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

Consult Factory

## ACCESSORIES - Installation



### LM20.104145

Outer Casing IP20


Sizes Ø3.54" x 3.35" h

For in-grade use

## PHOTOMETRIC DATA

Note: All photometric data is 3000K

Maximum Candela = 1766.0

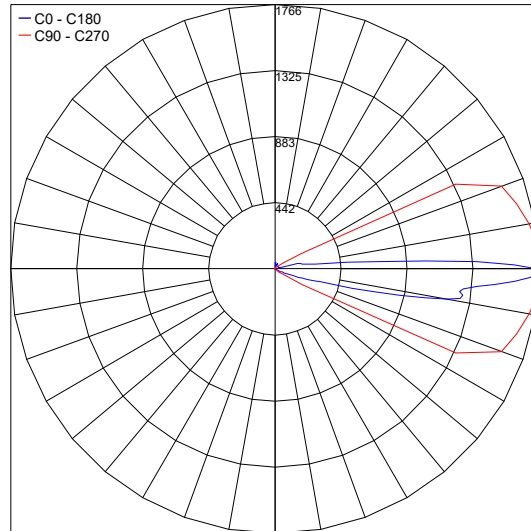

PHOTOMETRIC FILENAME : NAIL PRO 1 3000K LM07.104038.05.AS.BP.IES

Job Name/Date:

Fixture Type Designation: