


Nail Pro is an IP67-rated, in-grade upright suitable for ground or wall installation, perfect for marking paths, transforming corridors and lighting stairs. Nail Pro comes in 3 color temperatures and 4 different directional beam options. Nail Pro 4 is the four direction beam version in a stainless steel finish.

TECHNICAL DATA

Wattage / Input	4W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anodized Anticorodal Aluminum AISI 316L Stainless Steel Cable Length: 1.64'
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U3-G2 (3000K)
Delivered Lumens	475 lm (3000K)
Efficacy	118.8 lm/W (3000K)
Optics	Asymmetric
Finishes	Stainless Steel
Fixture Dimensions	Ø3.15" x 1.97" h
Cut-Out Size	Ø1.89"
Color Consistency	<3-Step MacAdam
IP Rating	IP67
Impact Resistance	IK10
Driveover Capacity	Up to 6614 lbs



Fixture Dimensions

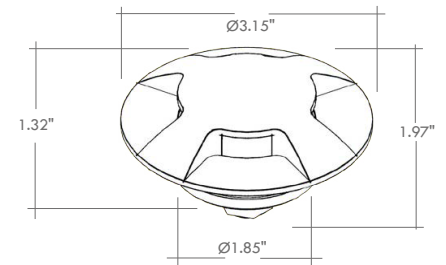

ORDERING INFORMATION

Example: LM07.104041.US.05.AS.BP. Accessories / Power Supplies ordered separately.

LM07.104041.US	05	AS	
Model No.	Finish	Optic	CCT
LM07.104041.US	05 - Stainless	AS - Asymmetric	BC - 2700K BP - 3000K BF - 4000K

Job Name/Date:

Fixture Type Designation:


SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00128	Non-Dim	120VAC to 24VDC, 6W, Class 2, IP65	1-1
PPLT00149	Non-Dim	120VAC to 24VDC, 10W, Class 2, IP65	1-2
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-2
PPLT00056	Non-Dim	120V-277AC to 24VDC, 26W, Class 2, IP66	1-5
PPLT00155	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-6
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-12
PPLT00627	ELV/TRIAC & 0-10V Dimming (100-0%), IP67	120-277VAC to 24VDC, 96W, Class 2	1-19
PPLT00158	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-20
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	3-20

For other power supply options consult factory.

ACCESSORIES - Installation




LM20.104145

Outer Casing IP20
 Sizes Ø3.54" x 3.35" h
 For in-grade use

PHOTOMETRIC DATA

Note: All photometric data is 3000K

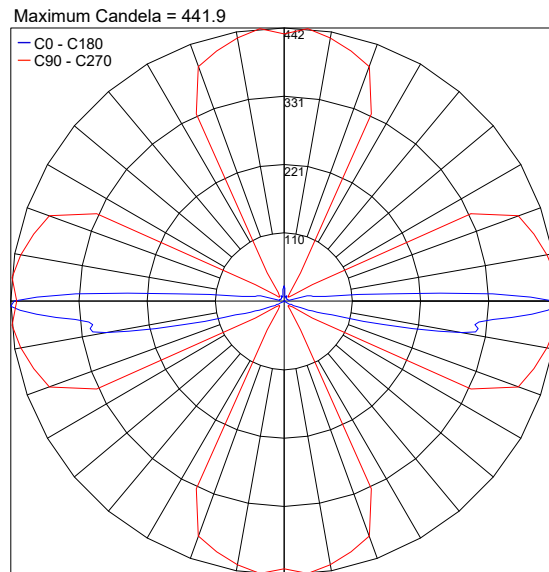

PHOTOMETRIC FILENAME : NAIL PRO 4 3000K LM07.104041.05.AS.BP.IES

Job Name/Date:

Fixture Type Designation: