

# NANO IP54

## BATHROOM


Nano are recessed wall luminaires made of Calcyt® plaster that can be used as an uplight or downlight orientation lighting. It is the baby brother of the Normall series and they are available as indoor (IP20), bathroom or outdoor (IP54) versions in 5 color temperatures.

### TECHNICAL DATA

|                    |                                        |
|--------------------|----------------------------------------|
| Wattage / Input    | 1W, 2W, 4W (350mA)                     |
| Power Supply       | Remote, not included. See page 2.      |
| Construction       | Body: CALCYT® plaster                  |
| CCT                | 2200K, 2700K, 3000K, 4000K, Royal Blue |
| CRI                | >90 and >80                            |
| Delivered Lumens   | —                                      |
| Efficacy           | —                                      |
| Optics             | Fixed                                  |
| Finishes           | Paintable Plaster                      |
| Fixture Dimensions | 2.76" l x 2.80" w x 5.12" h            |
| Cut-out Dimension  | 2.80" x 5.43"                          |
| Aperature          | 1.50" x 2.56"                          |
| Color Consistency  | 3-Step MacAdam                         |
| IP Rating          | IP20                                   |



Ceiling Cut-Out: 2.80" x 5.43"  
Fixture Dimensions

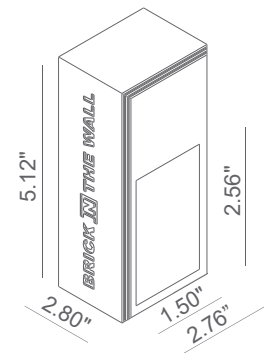

### ORDERING INFORMATION

*Example: 151 60 201. Accessories / Power Supplies ordered separately.*

| Model No.               | Description                       | Model No.               | Description                       |
|-------------------------|-----------------------------------|-------------------------|-----------------------------------|
| 151 60 501 - 2200K      | 1W, 100 lm, CRI 80, IP54 Bathroom | 151 61 501 - 2200K      | 4W, 400 lm, CRI 80, IP54 Bathroom |
| 151 60 001 - 2700K      | 1W, 100 lm, CRI 90, IP54 Bathroom | 151 61 001 - 2700K      | 4W, 400 lm, CRI 90, IP54 Bathroom |
| 151 60 101 - 3000K      | 1W, 100 lm, CRI 90, IP54 Bathroom | 151 61 101 - 3000K      | 4W, 400 lm, CRI 90, IP54 Bathroom |
| 151 60 201 - 4000K      | 1W, 100 lm, CRI 90, IP54 Bathroom | 151 61 201 - 4000K      | 4W, 400 lm, CRI 90, IP54 Bathroom |
| 151 60 301 - Royal Blue | 1W, 100 lm, IP20 IP54 Bathroom    | 151 61 301 - Royal Blue | 4W, 400 lm, IP54 Bathroom         |
| 151 62 501 - 2200K      | 2W, 200 lm, CRI 80, IP54 Bathroom |                         |                                   |
| 151 62 001 - 2700K      | 2W, 200 lm, CRI 90, IP54 Bathroom |                         |                                   |
| 151 62 101 - 3000K      | 2W, 200 lm, CRI 90, IP54 Bathroom |                         |                                   |
| 151 62 201 - 4000K      | 2W, 200 lm, CRI 90, IP54 Bathroom |                         |                                   |
| 151 62 301 - Royal Blue | 2W, 200 lm, IP54 Bathroom         |                         |                                   |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

| Part Number                 | Description           | Input/Output                              | # of Fixtures |     |     |
|-----------------------------|-----------------------|-------------------------------------------|---------------|-----|-----|
|                             |                       |                                           | 1W            | 2W  | 4W  |
| <a href="#">PPLT00138</a>   | 0-10V Dimming to 10%  | 120-277VAC to 350mA, 4W, Class 2          | 2-3           | 1-1 | N/A |
| <a href="#">PPLT00468</a>   | Phase Dim (120V only) | 120VAC to 350mA, 14W, Class 2             | 4-13          | 2-6 | 1-3 |
| <a href="#">PPLT00309-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 350mA, 50W, Class 2         | 1-19          | 1-9 | 1-4 |
| <a href="#">PPLT00561-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to (100-2000mA), 100W, Class 2 | 2-17          | 1-9 | 1-4 |

## Suggested Lutron Compatible

| Part Number               | Option         | Lutron SKU | Dim Range | Description                                   | Input/Output                      | # of Fixtures |     |     |
|---------------------------|----------------|------------|-----------|-----------------------------------------------|-----------------------------------|---------------|-----|-----|
|                           |                |            |           |                                               |                                   | 1W            | 2W  | 4W  |
| <a href="#">PPLT00247</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv. | 120-277VAC to 350mA, 7W, Class 2  | 3-6           | 2-3 | 1-1 |
| <a href="#">PPLT00516</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv. | 120-277VAC to 350mA, 13W, Class 2 | 6-13          | 3-6 | 2-3 |
| <a href="#">PPLT00179</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv. | 120-277VAC to 350mA, 19W, Class 2 | 11-18         | 6-9 | 3-4 |

For other power supply options consult factory.

## REQUIRED ACCESSORIES

## Installation

751 01 000

Outer Casing

Housing: perforated aluminum

Job Name/Date:

Fixture Type Designation: