

Nastro is a totally disappearing bidirectional semi-recessed luminaire made of AirCoral® that is suitable for indoor installation on walls or ceilings. It is available in 3000K as standard with a 120° optic.



## TECHNICAL DATA


<b>Wattage / Input</b>	2 x 6.5W (350mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: AirCoral® Lens: Extra White Satin Glass
<b>CCT</b>	3000K (2700K, 4000K on request)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	810 lm per beam (3000K)
<b>Efficacy</b>	124.6 lm/W per beam
<b>Optics</b>	120°
<b>Finishes</b>	AirCoral®
<b>Fixture Dimensions</b>	33.46" l x 10.24" w x 6.69" h
<b>Cut-out Dimension</b>	33.86" x 10.63"
<b>Fixture Weight</b>	24.25 lbs
<b>IP Rating</b>	IP40

The body is made of AirCoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for AirCoral® calculator.

Additionally, AirCoral® is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.

Fixture Dimensions

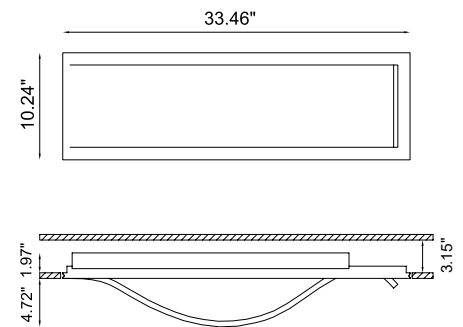

## ORDERING INFORMATION

Example: BU2979.AC.US. Power Supplies ordered separately.

BU2979	AC	US
<b>Model No.</b>	<b>Finish</b>	
BU2979	AC - AirCoral®	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00468</a>	Phase Dim (120V Only)	120VAC to 350mA, 14W, Class 2	1-1
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-1
<a href="#">PPLT00168-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2	1-2
<a href="#">PPLT00561-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-1

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120VAC to 350mA, 13W, Class 2	1-1
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	1-1

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation: